



TECHNICAL DATASHEETS


PORTAGANTRY®

500kg

[REIDLIFTING.COM](https://www.reidlifting.com)



To ensure stability of the structure, the working span of the beam must be equal or greater than the distance between the castors on the A-frame

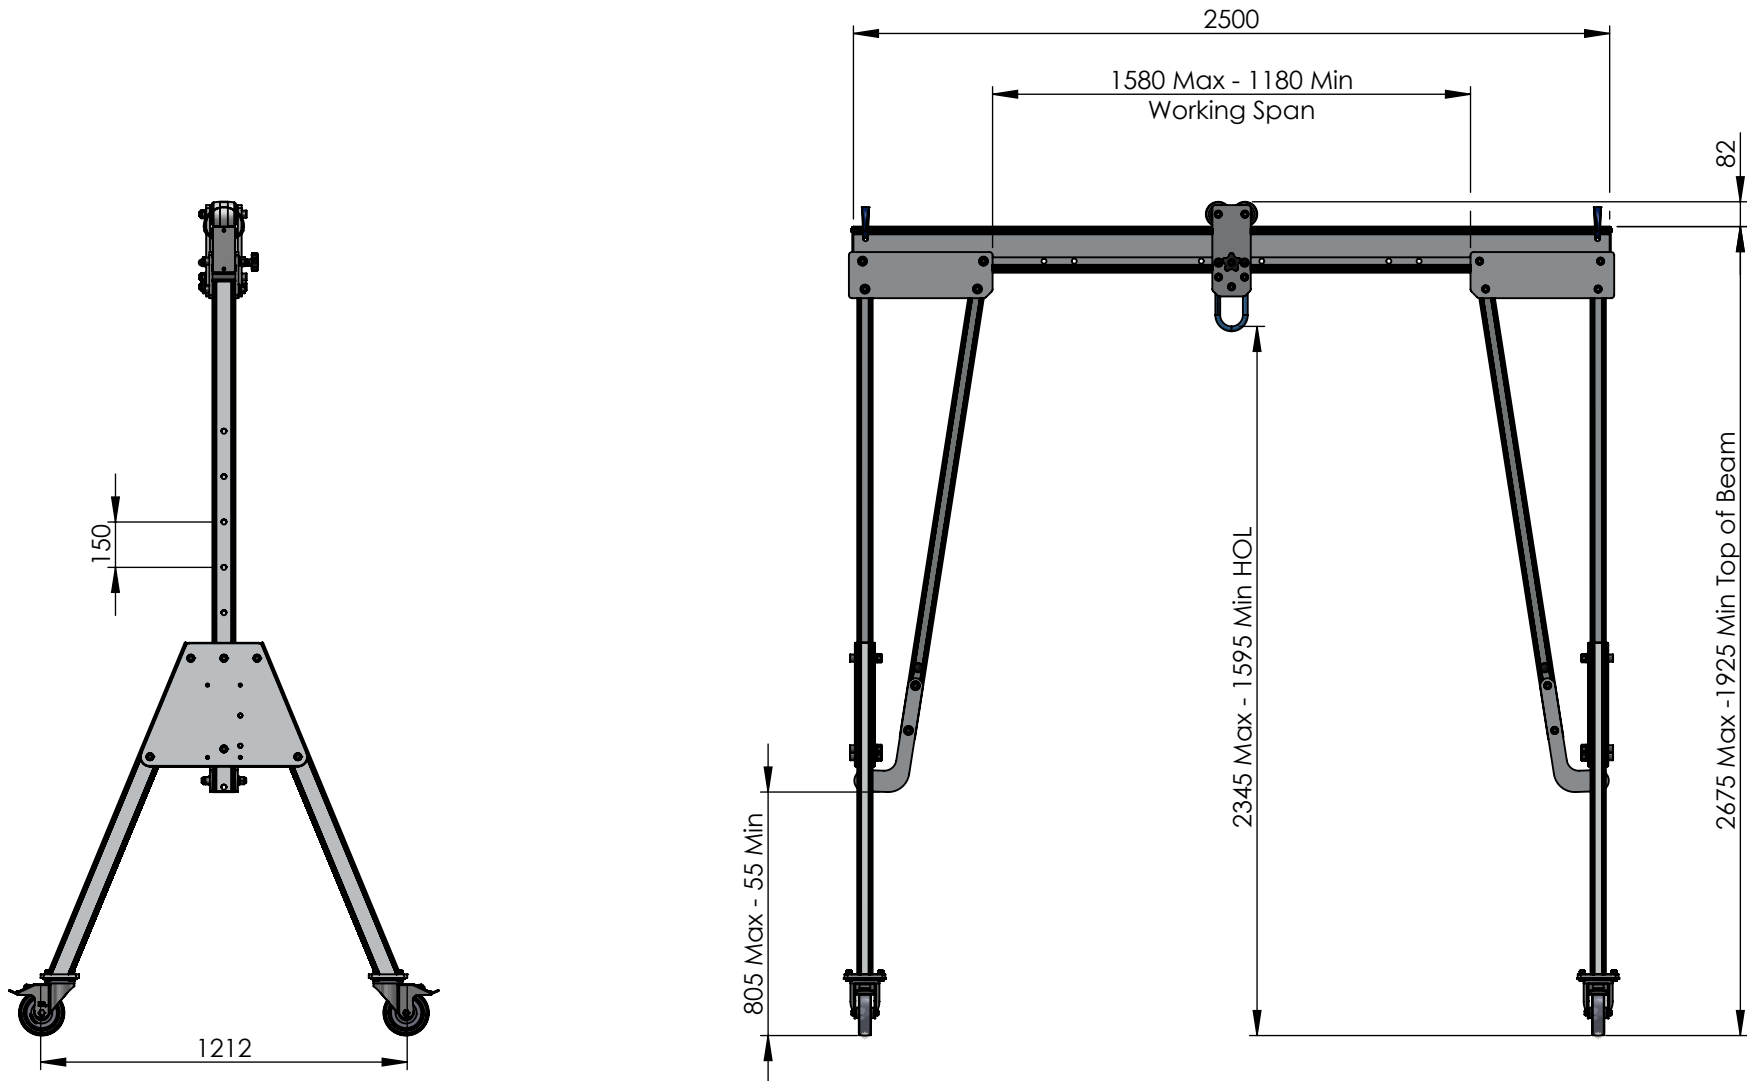

DO NOT SCALE DRAWING

REVISION

03

REID
LIFTING

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
BJ		23/03/2021	Anodised
CHK'D			
CM		09/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 2500mm Beam**

DWG NO.

PGSS00500S-2500A

A4

Estimated Weight: 82 kg

1:25

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 0-5mm at centre of span
- Maximum castor surface pressure at full load - 14.68 Mpa
- Assembled gantry weight (excluding trollies) - 83kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolley shown in system as a reference

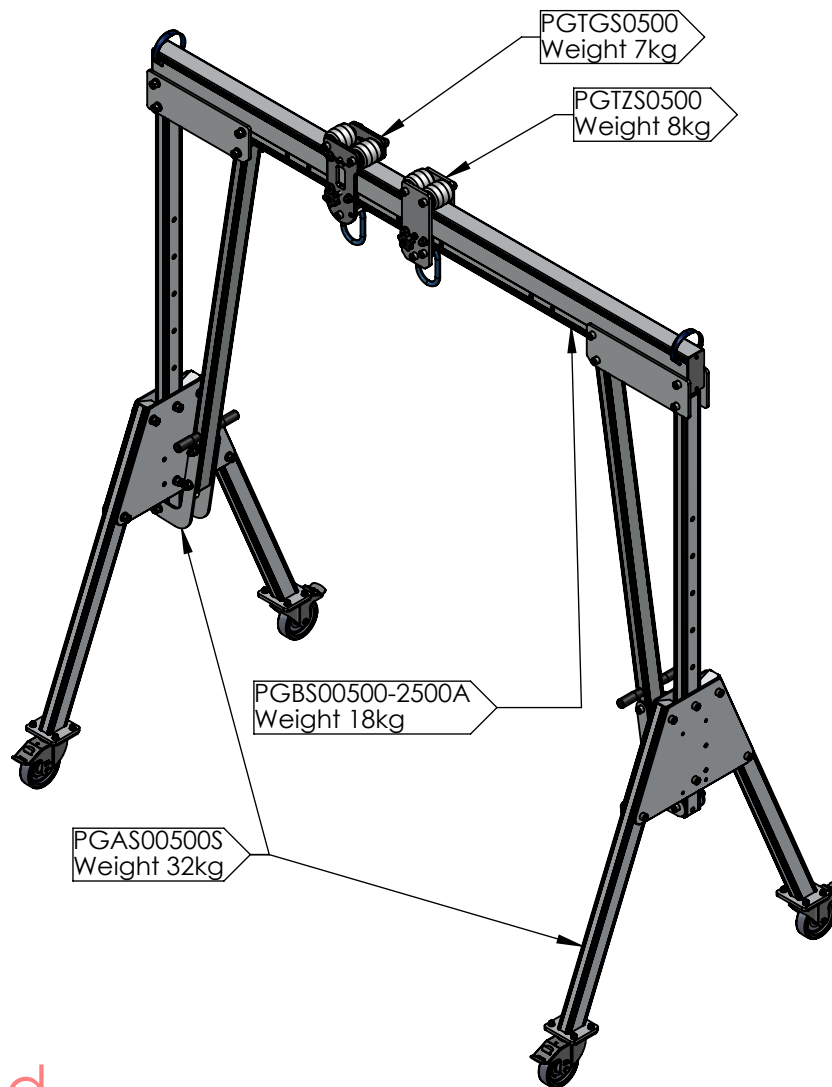

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	23/03/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 2500mm Beam**

DWG NO.



PGSS00500S-2500A

A4

Estimated Weight: 82 kg

1:25

SHEET 2 OF 2

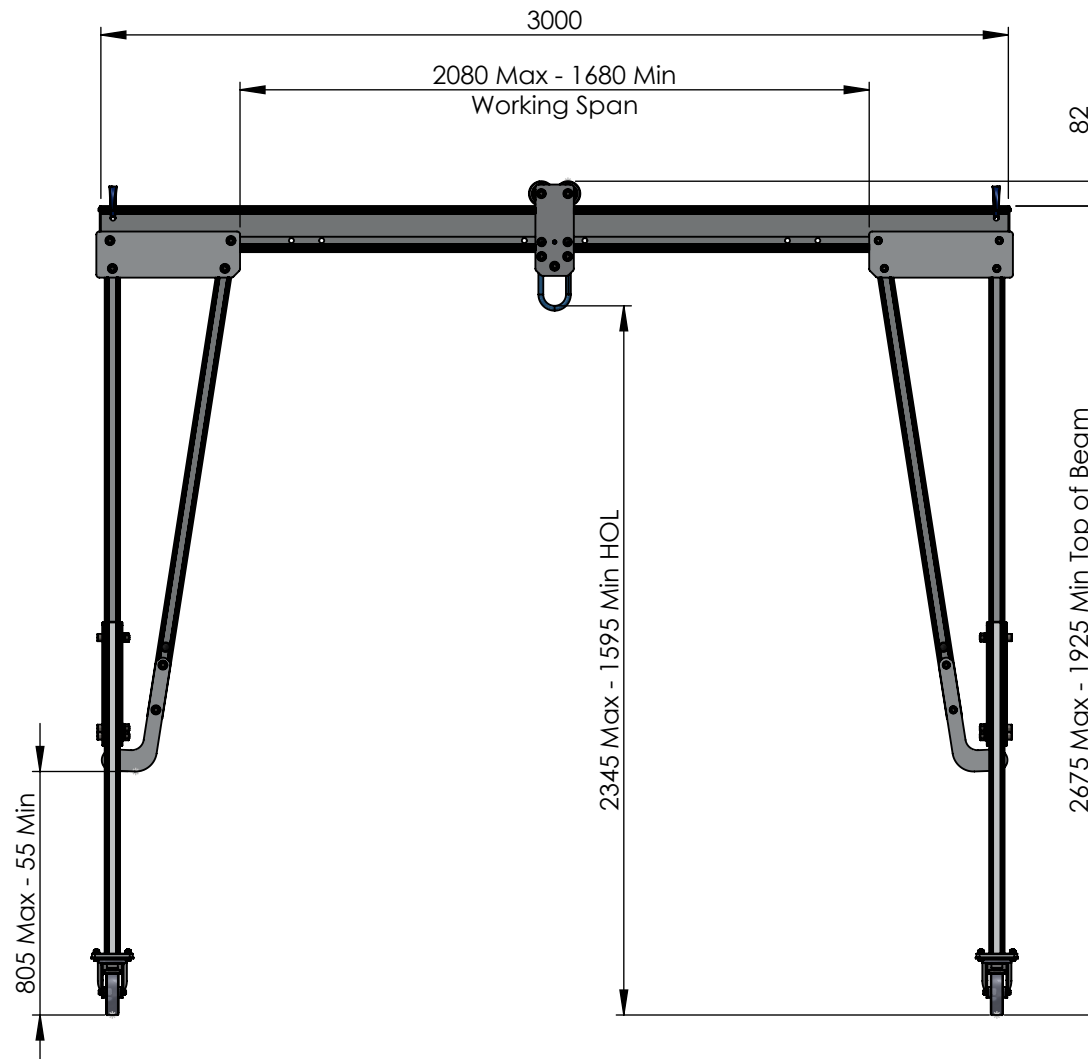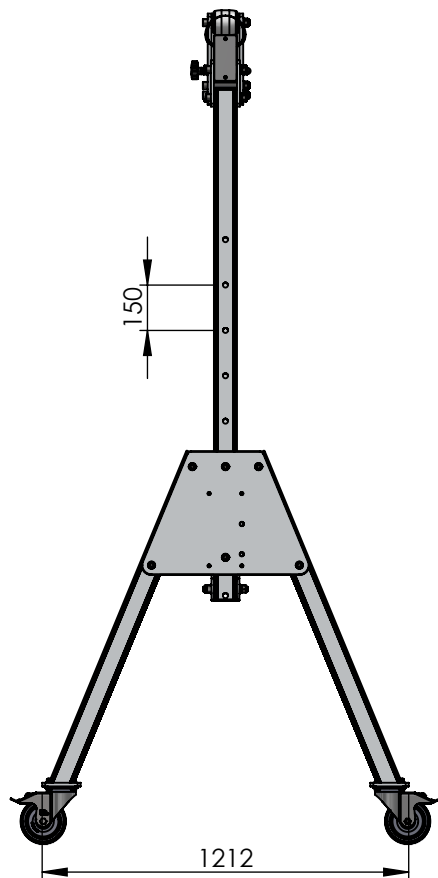

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		14/05/2021	Anodised
CHK'D			MATERIAL:
CM		09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size: Small -
WLL500kg 3000mm Beam**

DWG NO.

PGSS00500S-3000A

A4

Estimated Weight: 86 kg

1:25

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 0-5 mm at centre of span
- Maximum castor surface pressure at full load - 14.73 Mpa
- Assembled gantry weight (excluding trolleys) - 86kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

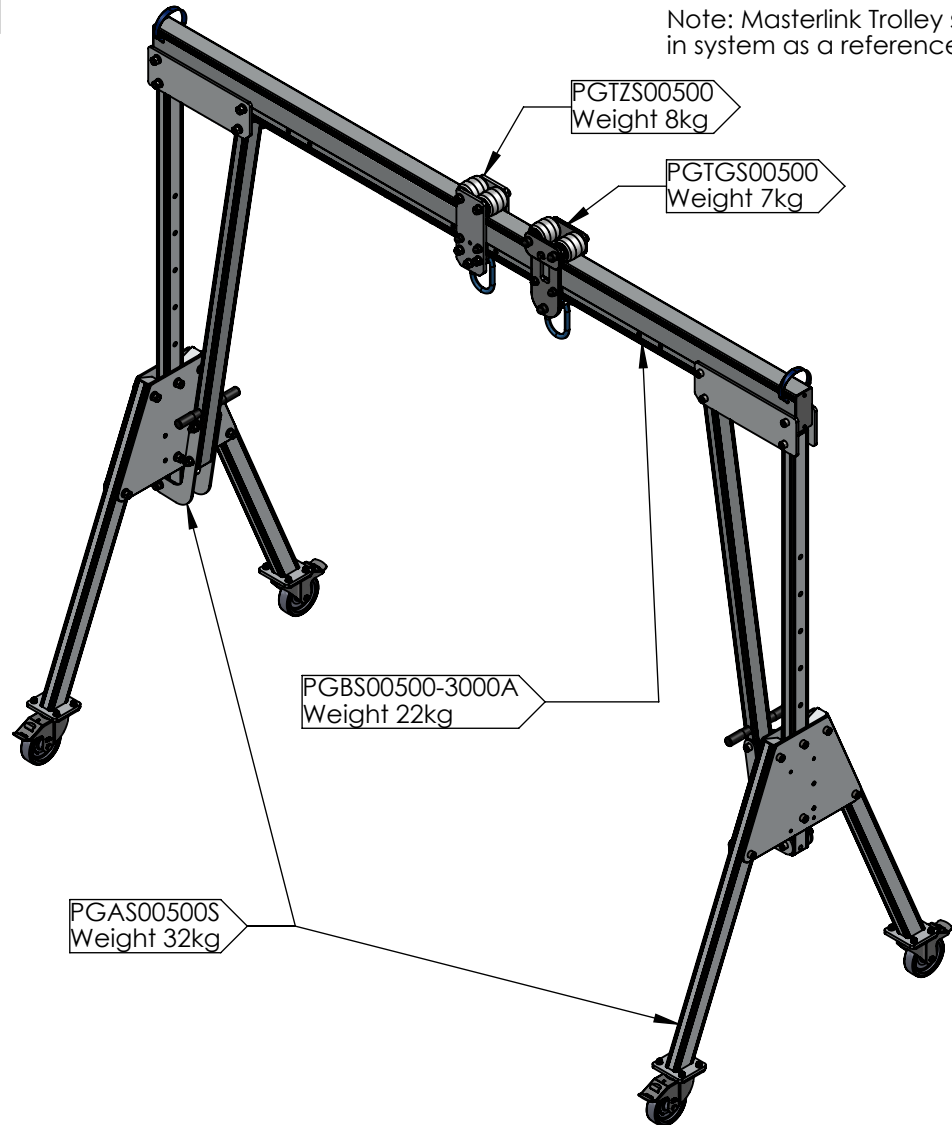

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	14/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 3000mm Beam**



DWG NO. **PGSS00500S-3000A**

A4

Estimated Weight: 86 kg

1:25

SHEET 2 OF 2

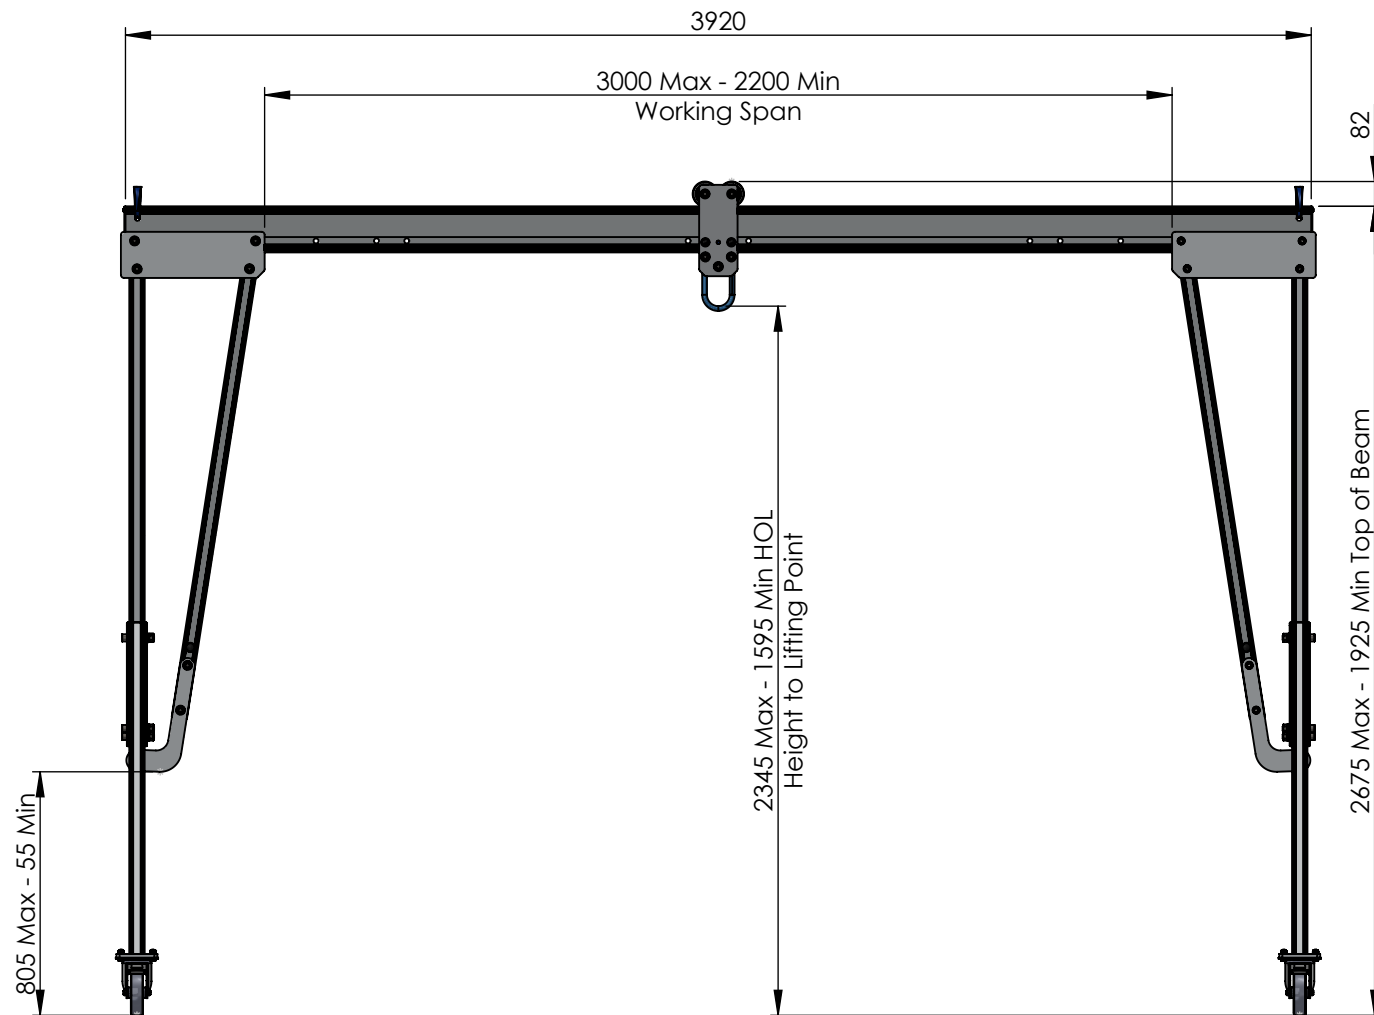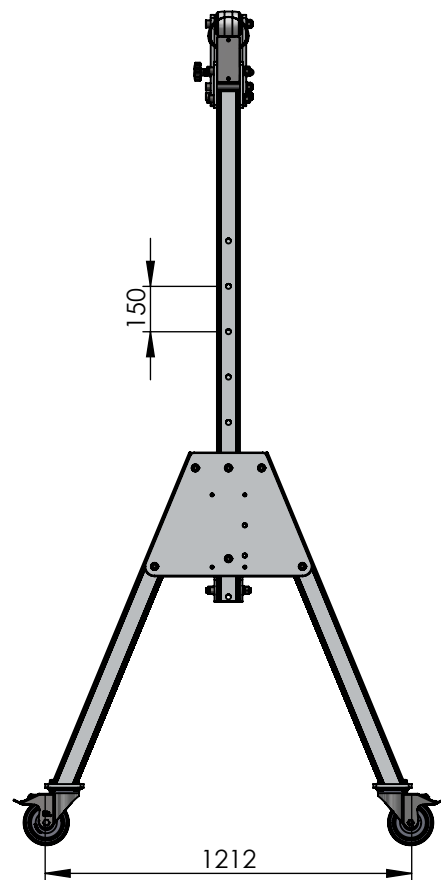

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	TB	17/05/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size: Small -
WLL500kg 3920mm Beam**

DWG NO.

PGSS00500S-3920A

A4

Estimated Weight: 93 kg

1:25

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 5-10 mm at centre of span
- Maximum castor surface pressure at full load - 14.82 MPa
- Assembled gantry weight (excluding trollies) - 93kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

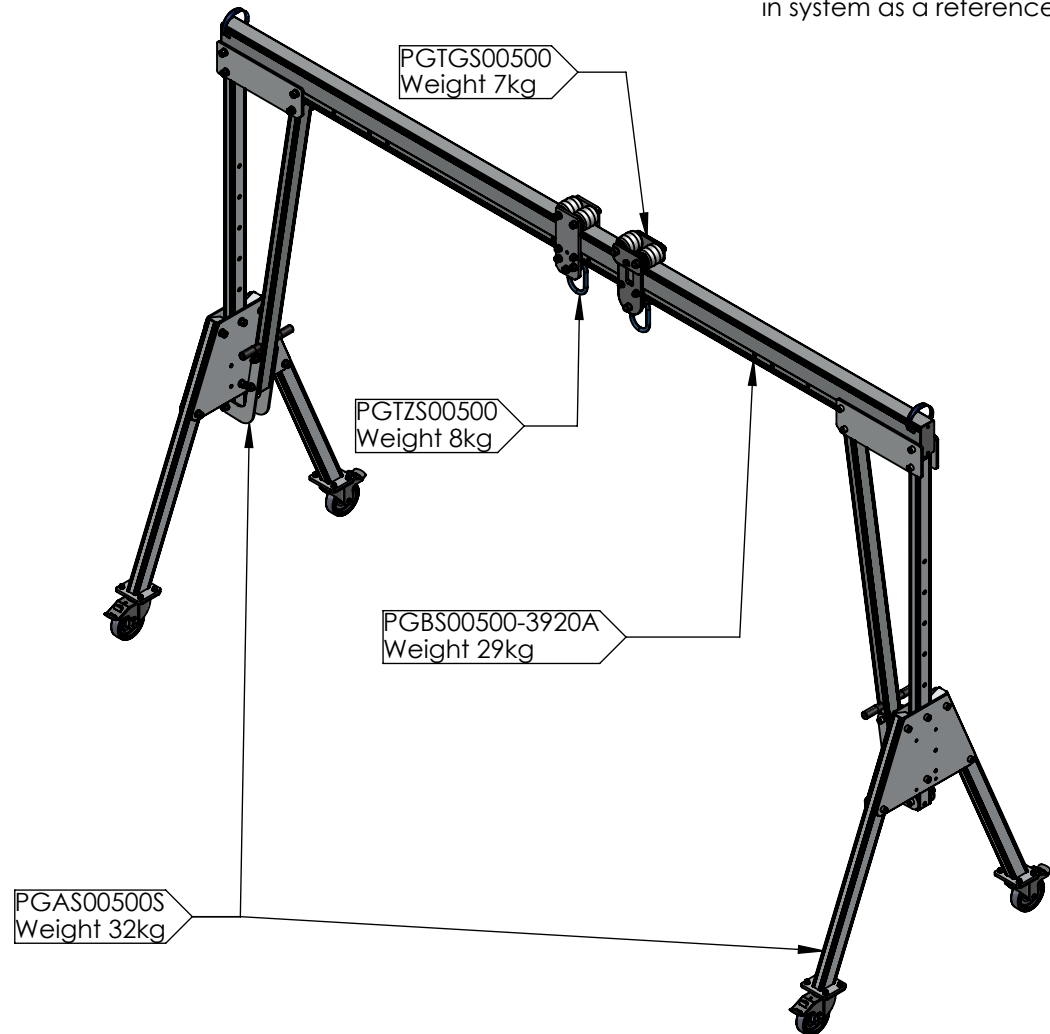

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	17/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 3920mm Beam**


DWG NO. **PGSS00500S-3920A**

A4

Estimated Weight: 93 kg

1:30

SHEET 2 OF 2

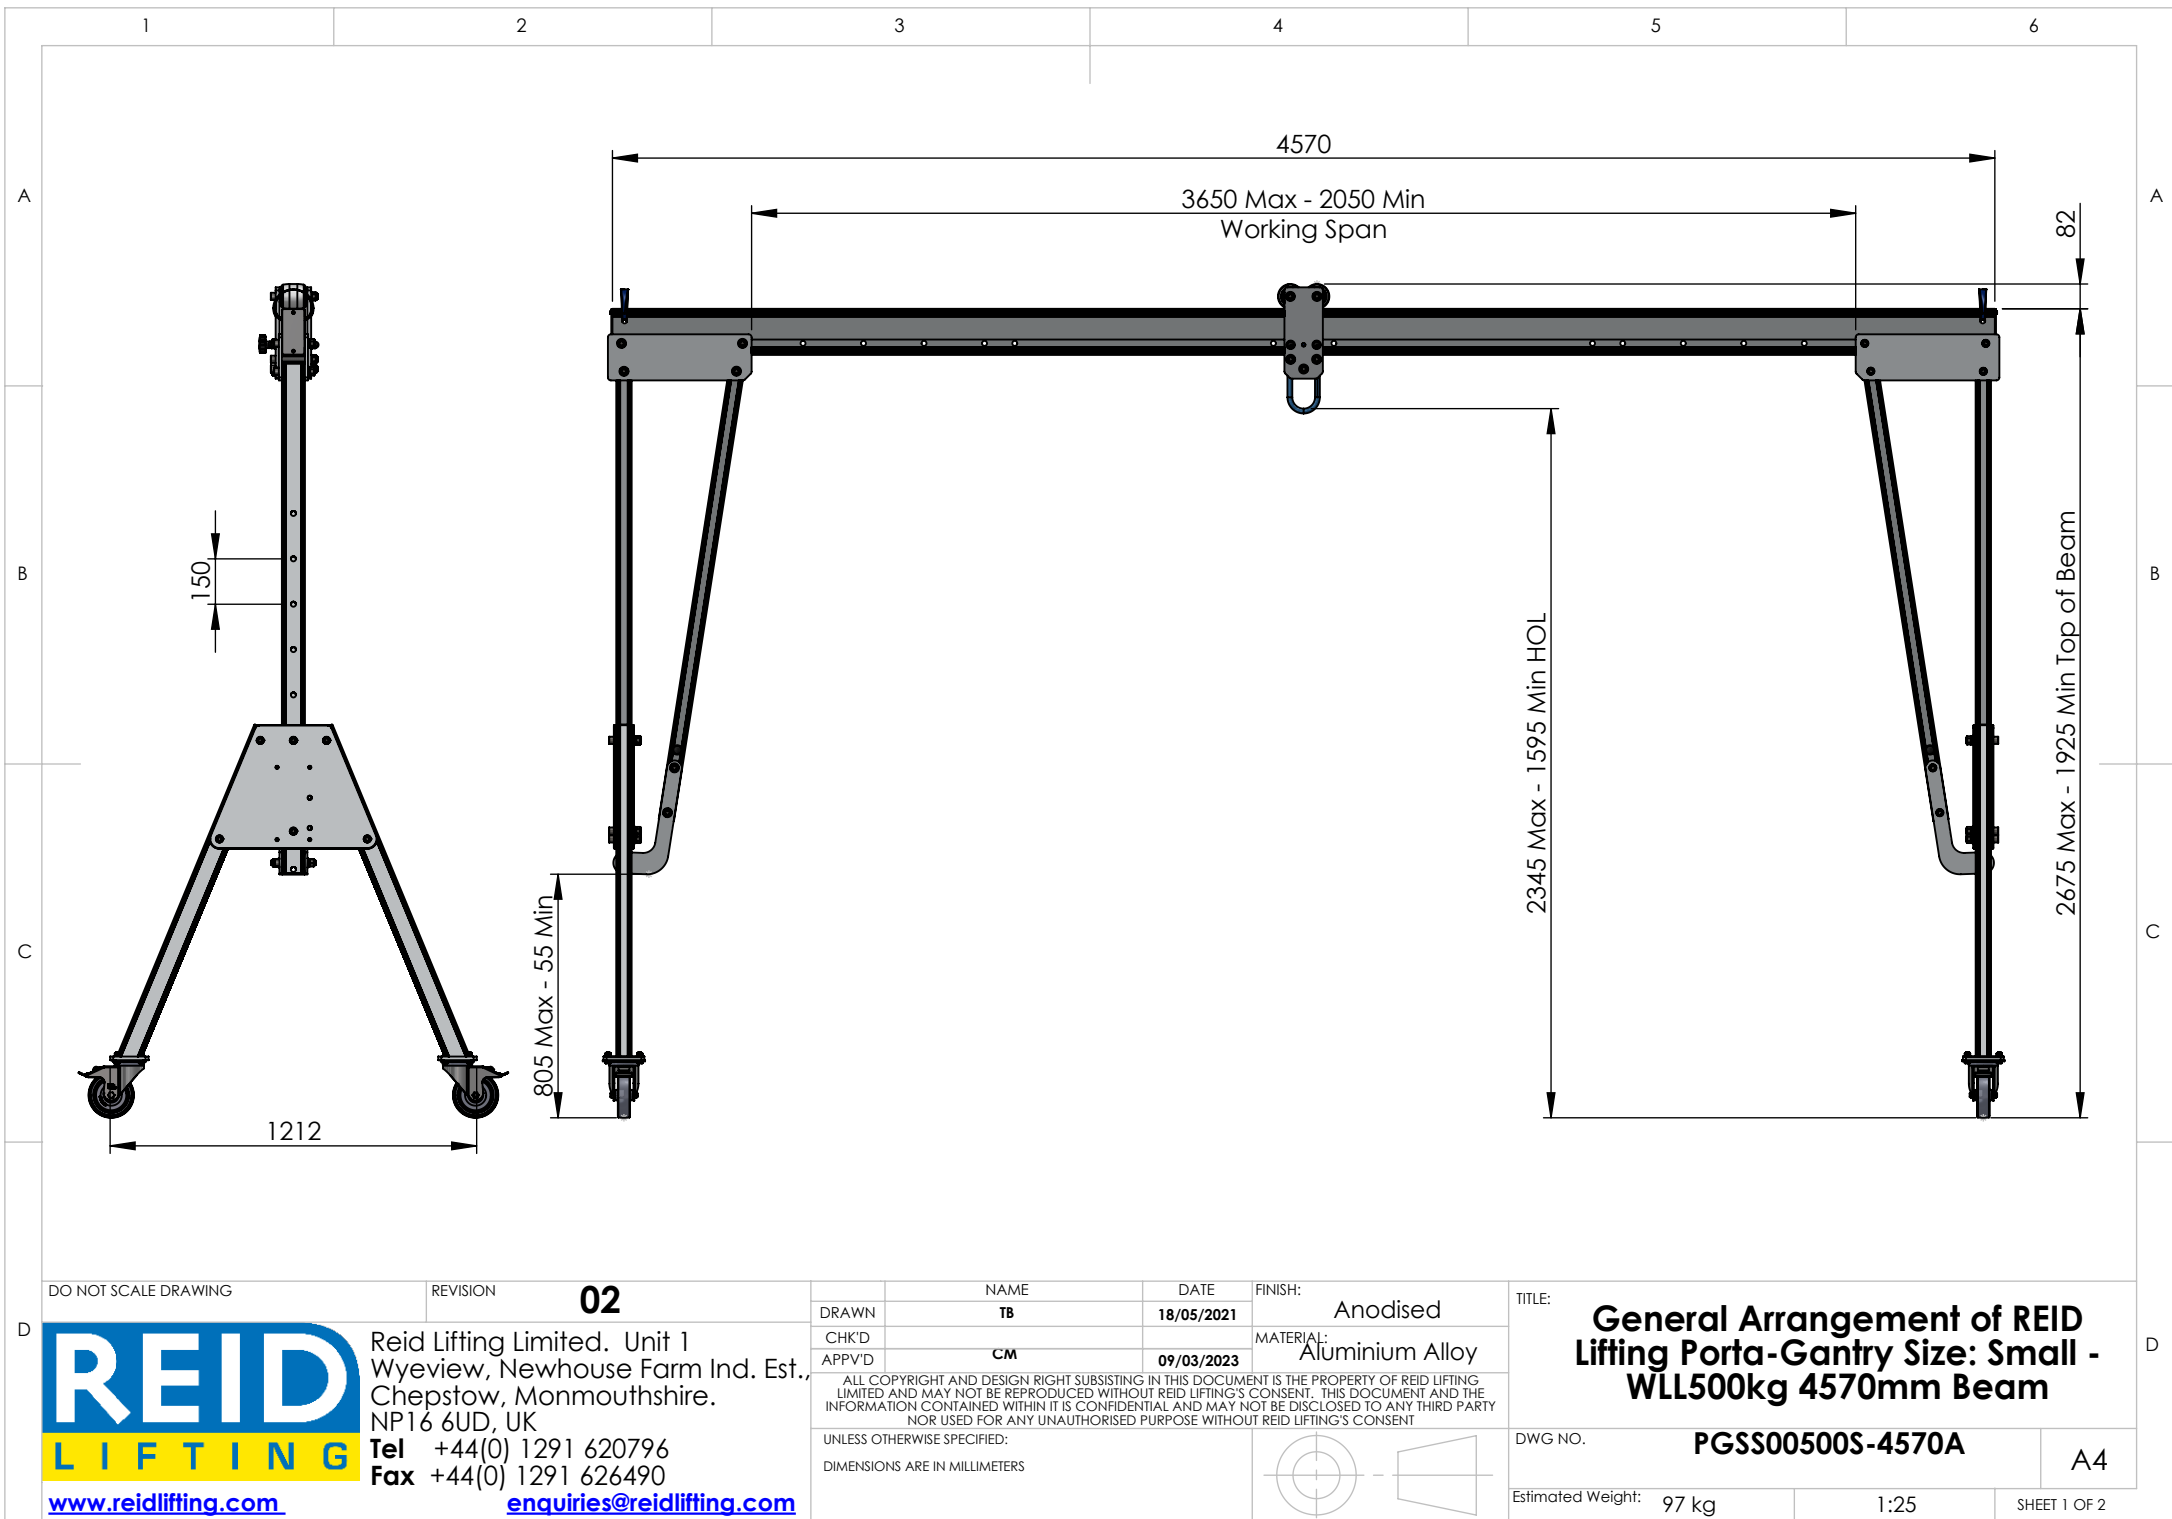

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		18/05/2021	Anodised
CHK'D	NAME	DATE	MATERIAL:
CM		09/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 4570mm Beam	
DWG NO.	PGSS00500S-4570A		A4
Estimated Weight:	97 kg	1:25	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 10-15 mm at centre of span
- Maximum castor surface pressure at full load - 14.88 MPa
- Assembled gantry weight (excluding trollies) - 98kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

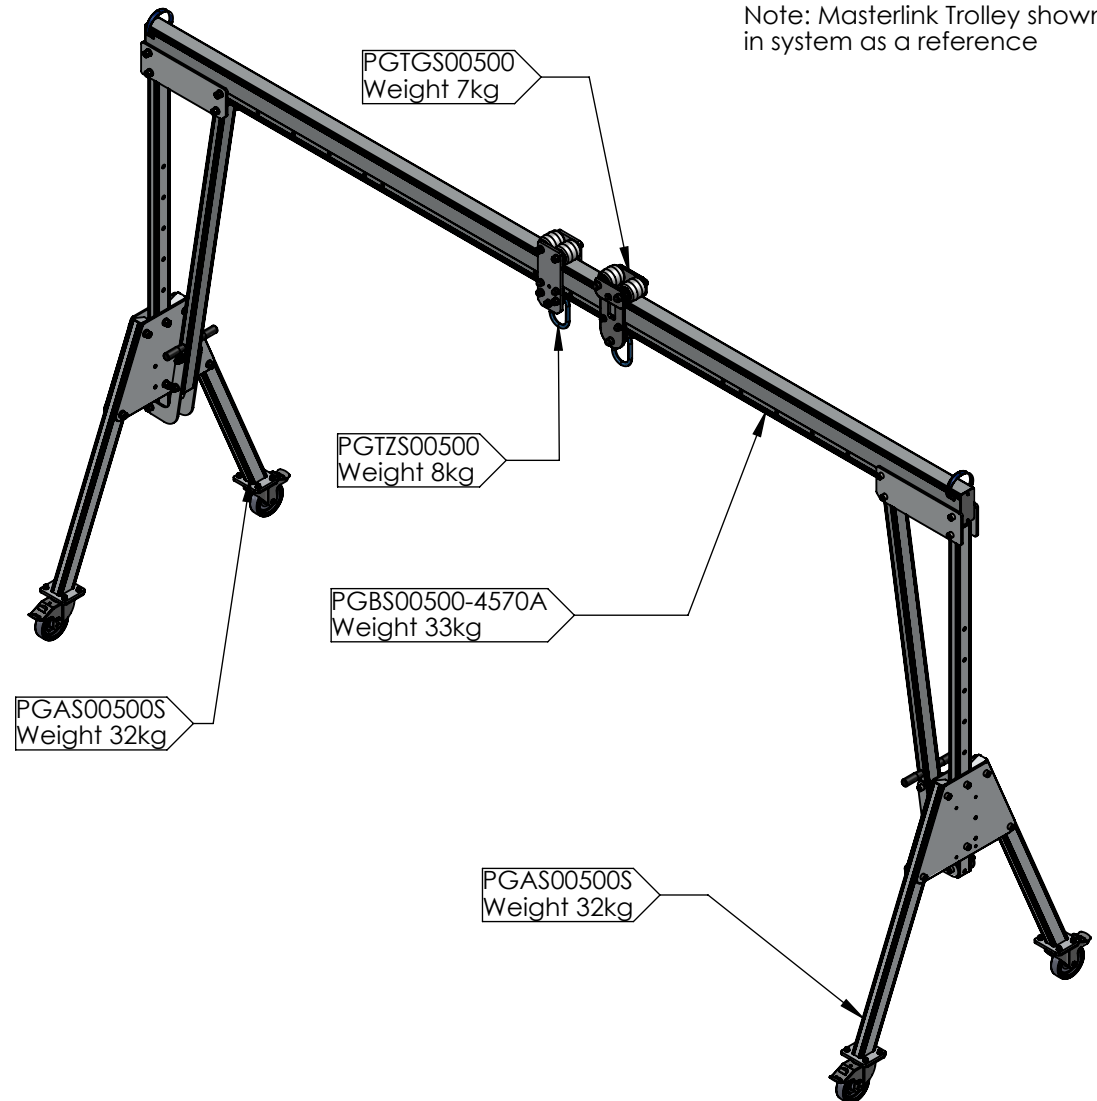

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	18/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 4570mm Beam**


DWG NO. **PGSS00500S-4570A**

A4

Estimated Weight: 97 kg

1:30

SHEET 2 OF 2

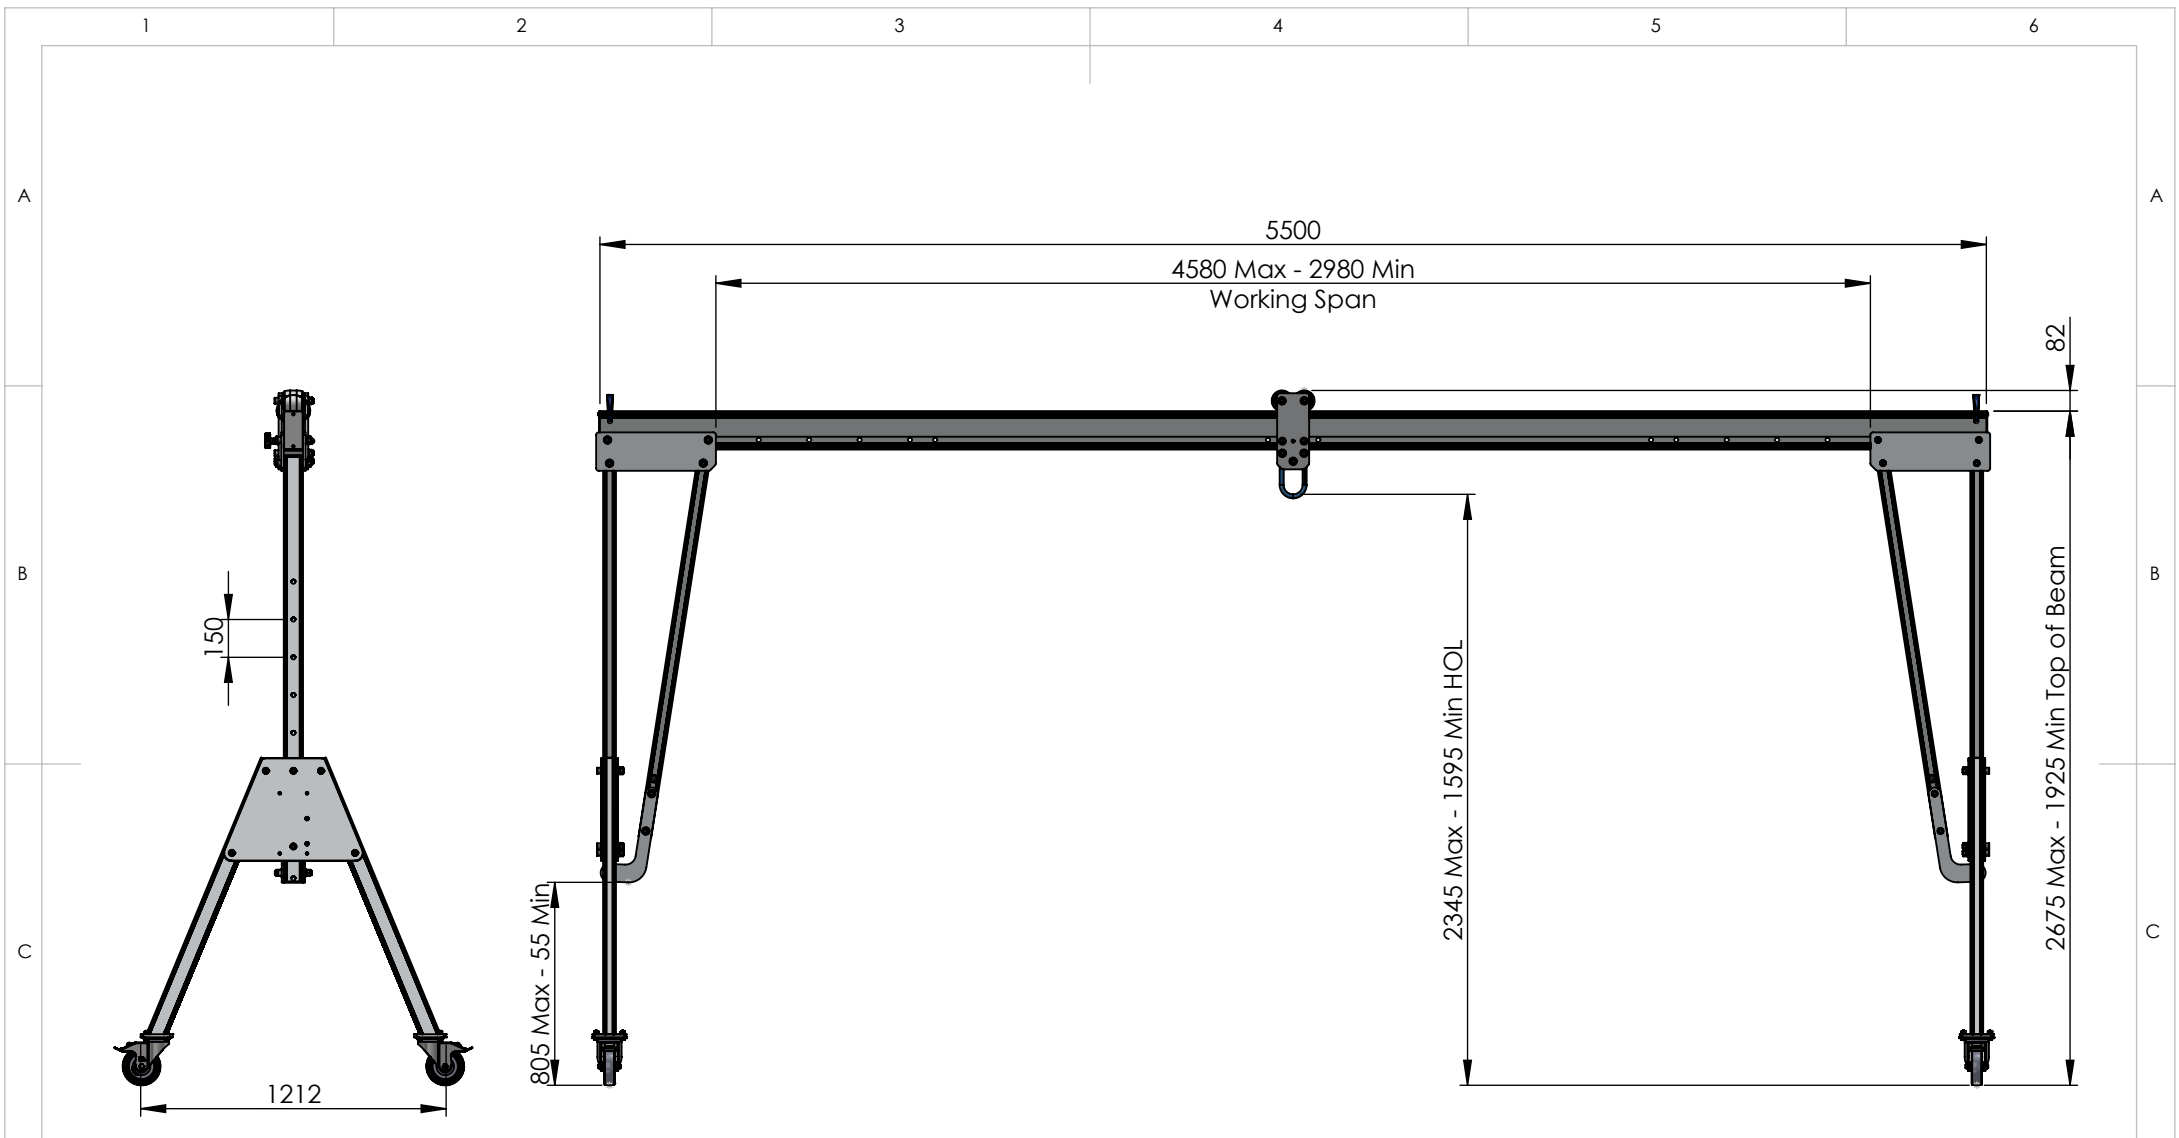

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	TB	18/05/2021	Anodised
CHK'D			MATERIAL:
APPV'D	CM	09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 5500mm Beam	
DWG NO.	PGSS00500S-5500A		A4
Estimated Weight:	104 kg	1:30	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 20-30 mm at centre of span
- Maximum castor surface pressure at full load - 14.98 MPa
- Assembled gantry weight (excluding trollies) - 105kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

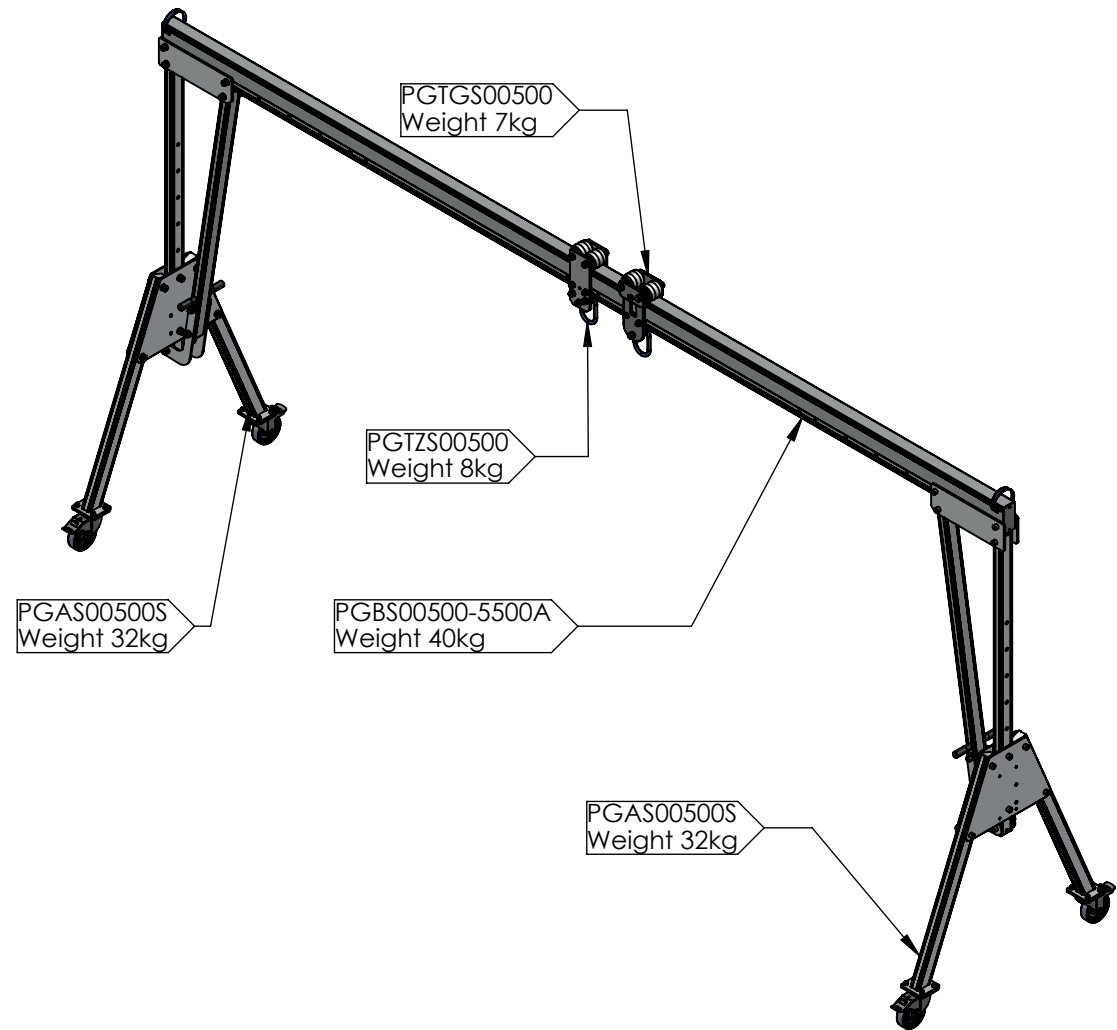

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	18/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 5500mm Beam**


DWG NO. **PGSS00500S-5500A**

A4

Estimated Weight: 104 kg

1:35

SHEET 2 OF 2

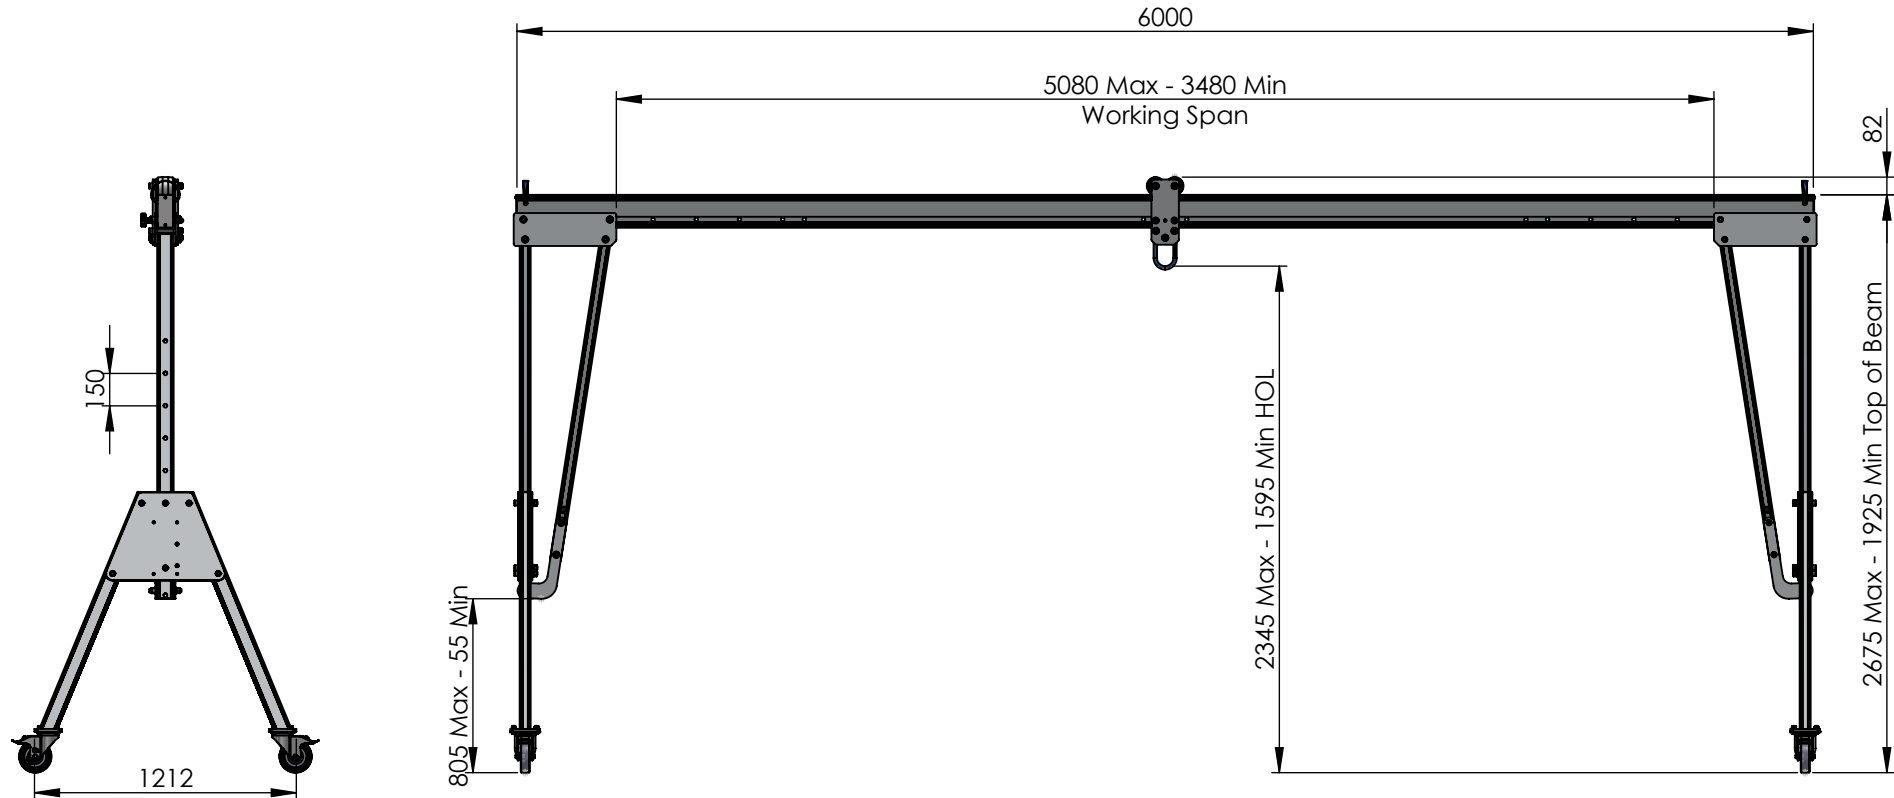

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		18/05/2021	Anodised
CHK'D	NAME	DATE	MATERIAL:
CM		09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 6000mm Beam	
DWG NO.	PGSS00500S-6000A		A4
Estimated Weight:	108 kg	1:35	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 25-35 mm at centre of span
- Maximum castor surface pressure at full load - 15.02 MPa
- Assembled gantry weight (excluding trollies) - 108kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

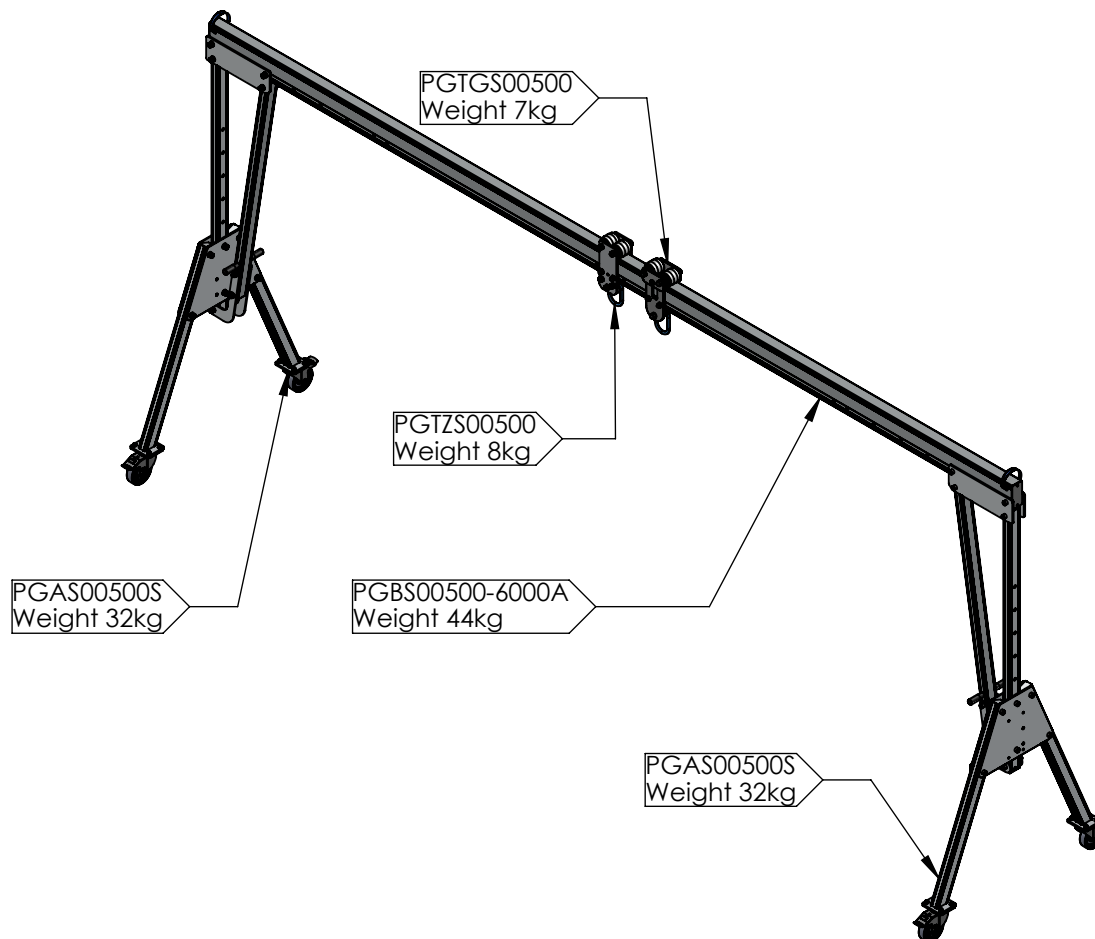

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	18/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 6000mm Beam**

DWG NO.


PGSS00500S-6000A

A4

Estimated Weight: 108 kg

1:40

SHEET 2 OF 2

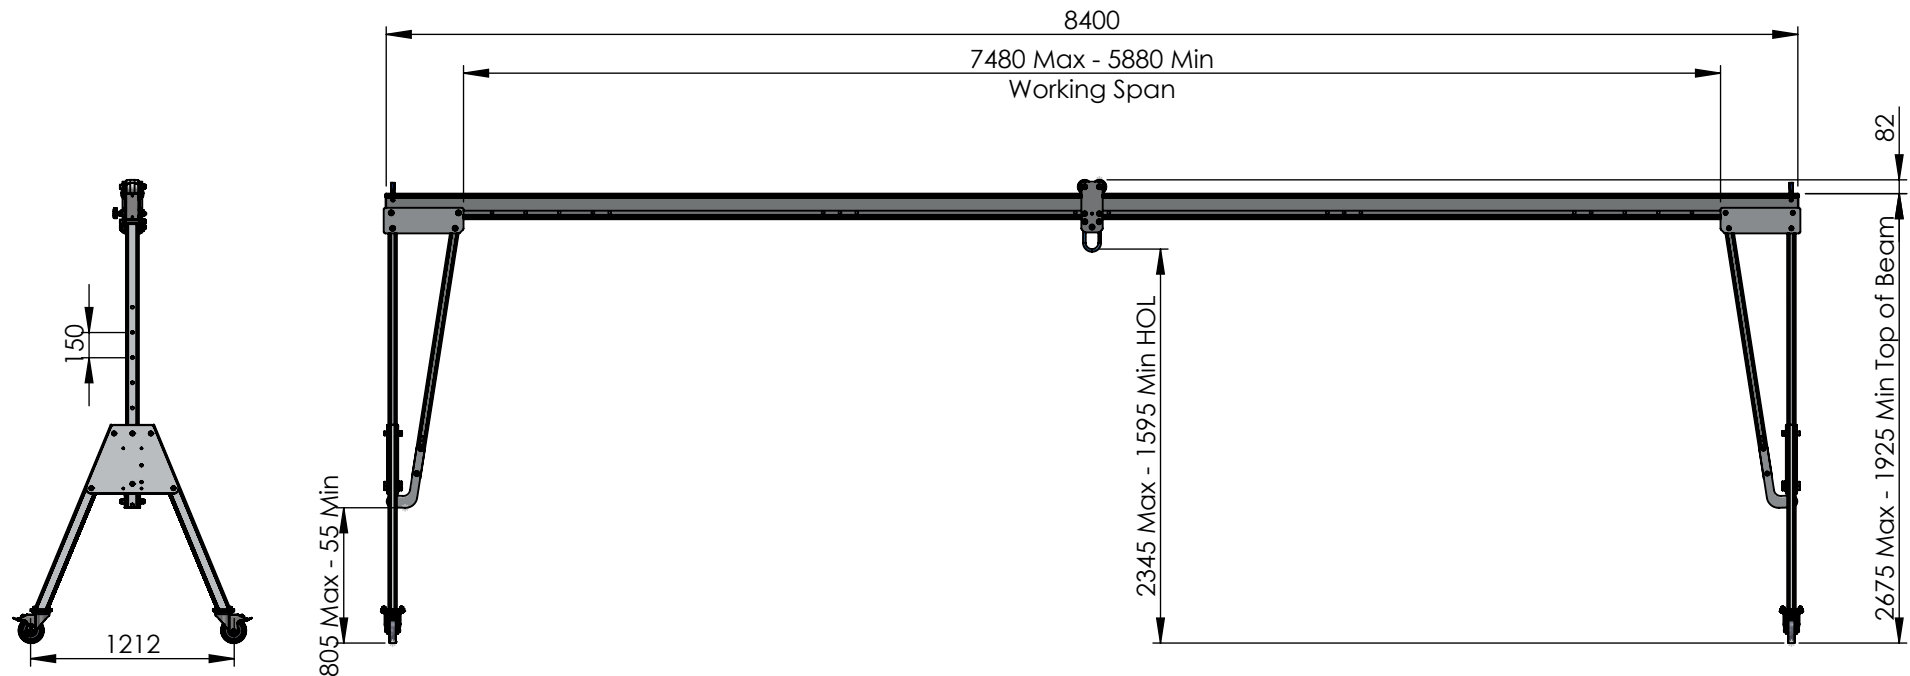

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	TB	18/05/2021	Anodised
CHK'D			MATERIAL:
APPV'D	CM	09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 8400mm Beam	
DWG NO.	PGSS00500S-8400A		A4
Estimated Weight:	125 kg	1:45	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 60-70 mm at centre of span
- Maximum castor surface pressure at full load - 15.26 MPa
- Assembled gantry weight (excluding trolleys) - 125kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

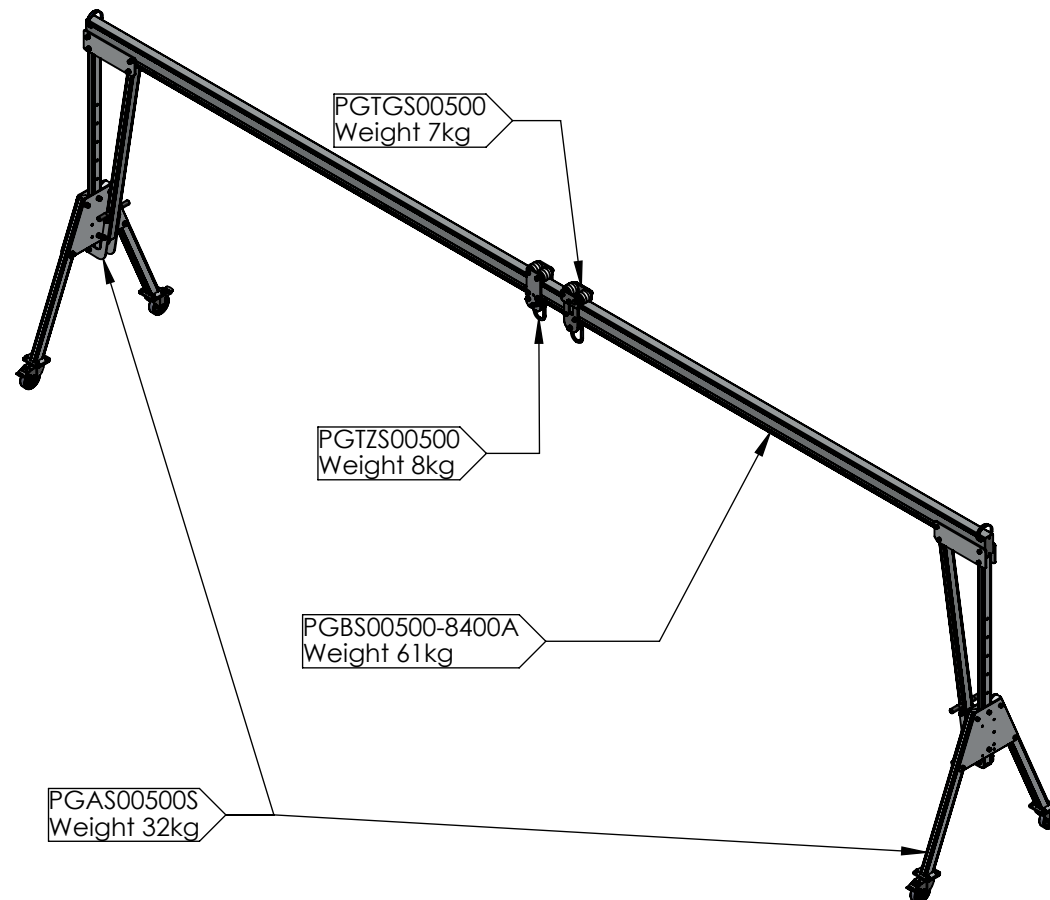

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	18/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 8400mm Beam**


DWG NO. **PGSS00500S-8400A**

A4

Estimated Weight: 125 kg

1:50

SHEET 2 OF 2

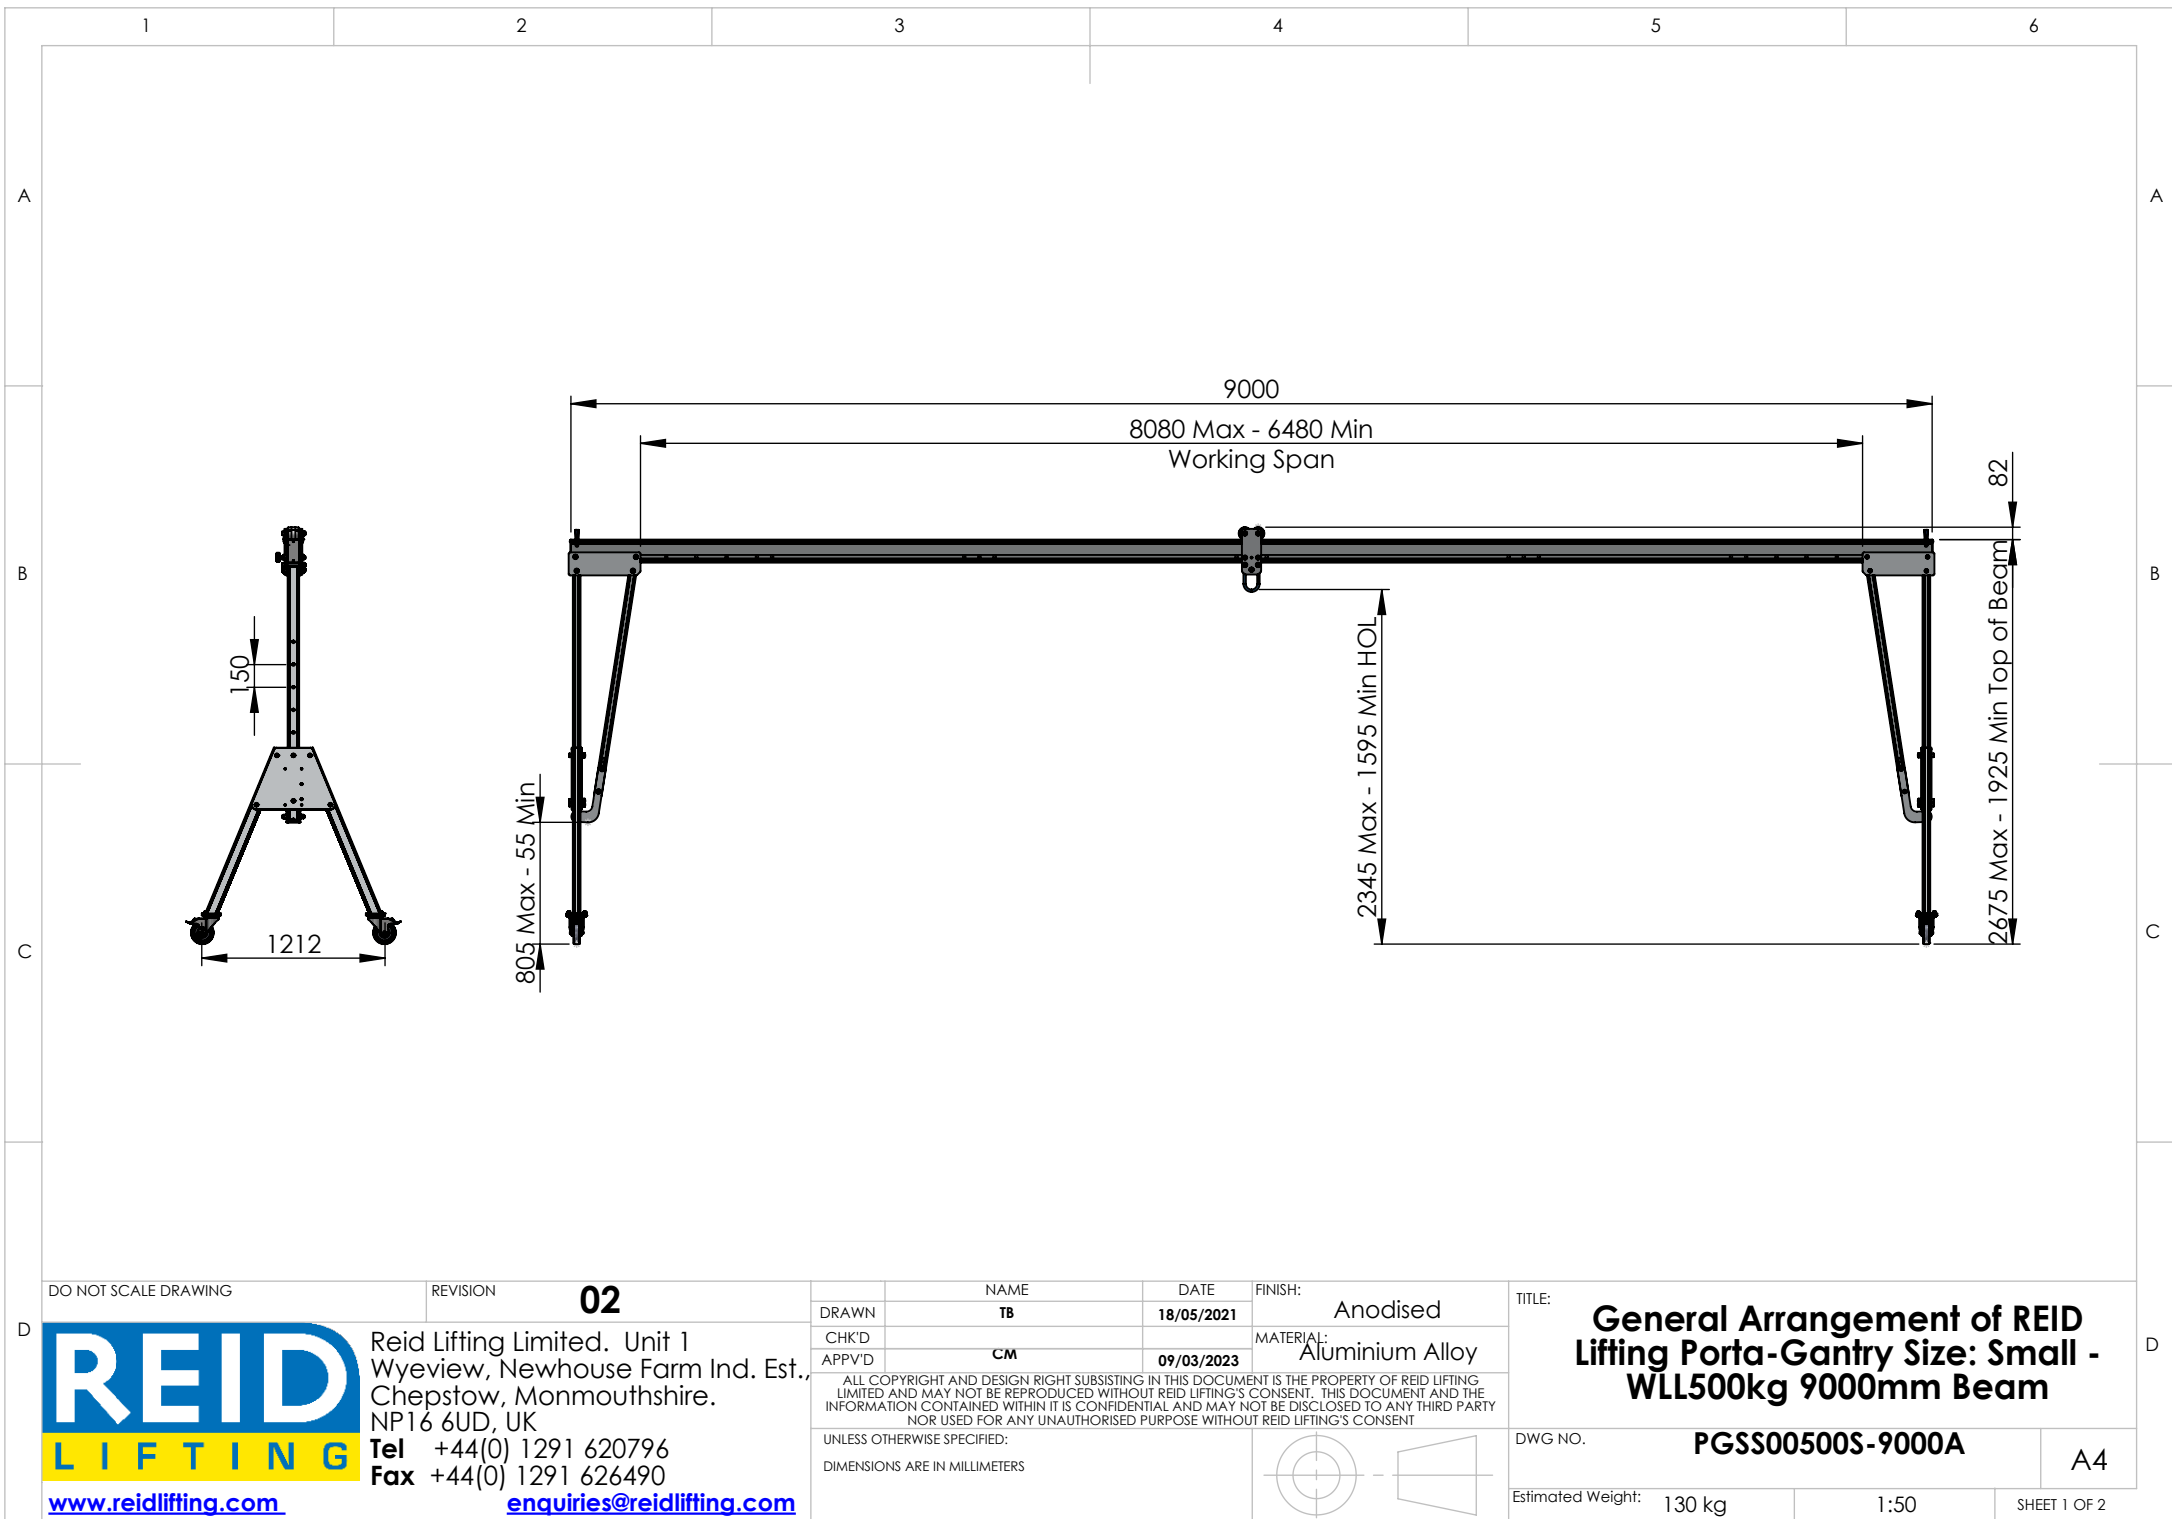

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	TB	18/05/2021	Anodised
CHK'D			
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 9000mm Beam	
DWG NO.	PGSS00500S-9000A		A4
Estimated Weight:	130 kg	1:50	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 80-90 mm at centre of span
- Maximum castor surface pressure at full load - 15.32 MPa
- Assembled gantry weight (excluding trolleys) - 130kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Masterlink Trolley shown in system as a reference

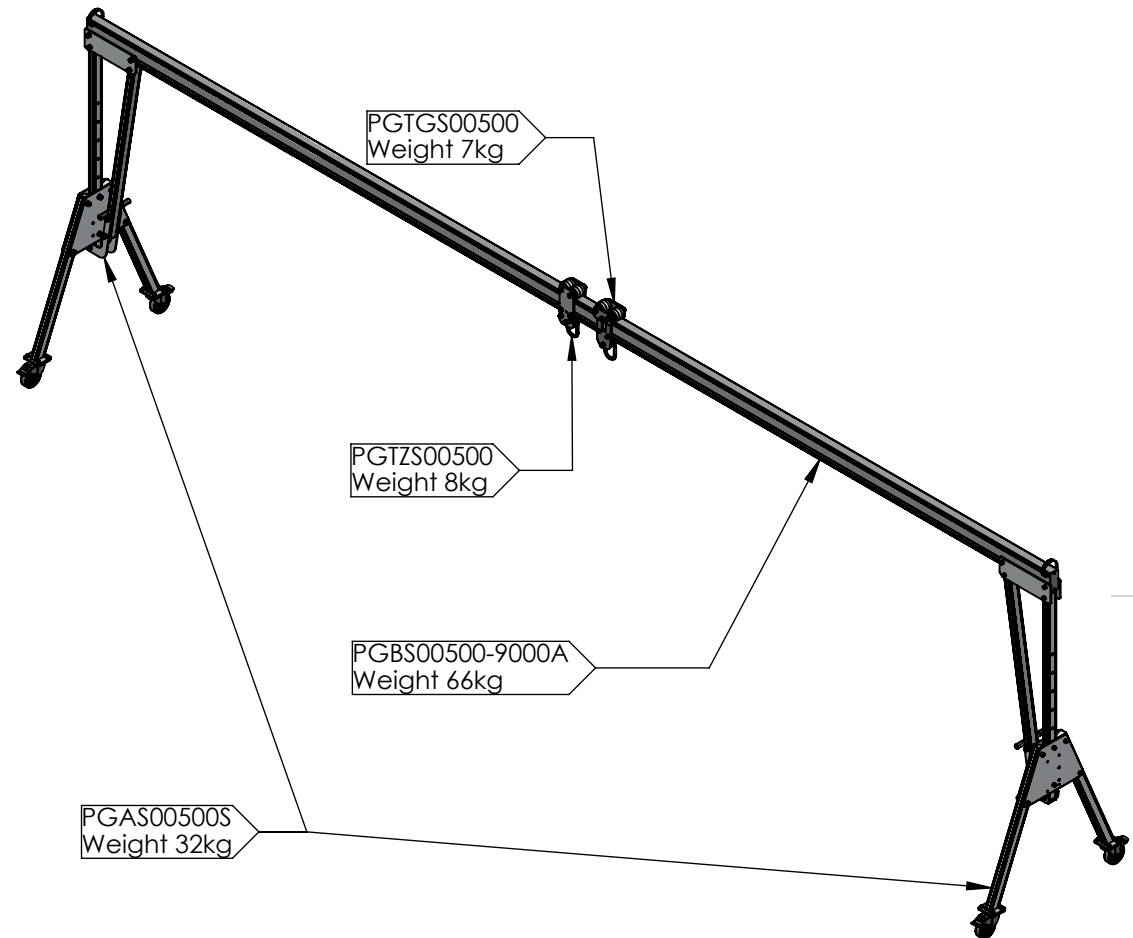

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	18/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size: Small - WLL500kg 9000mm Beam**

DWG NO.

PGSS00500S-9000A

A4



Estimated Weight: 130 kg

1:50

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-frame

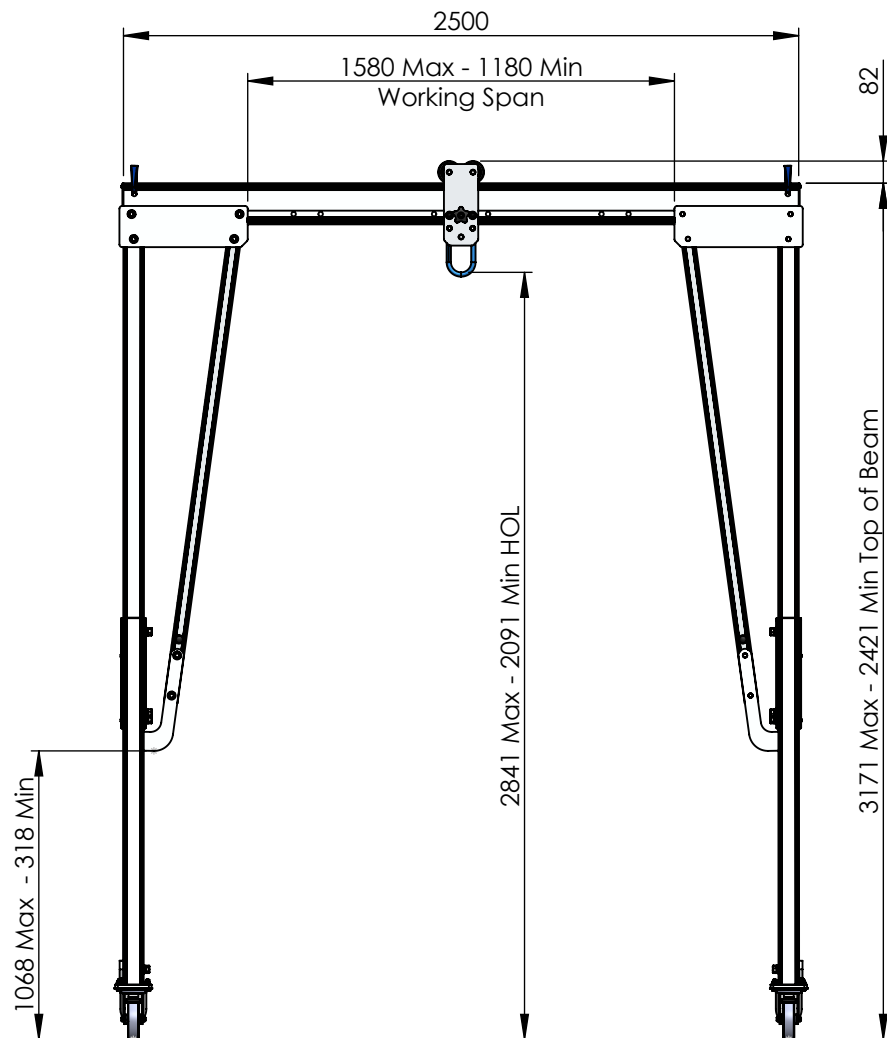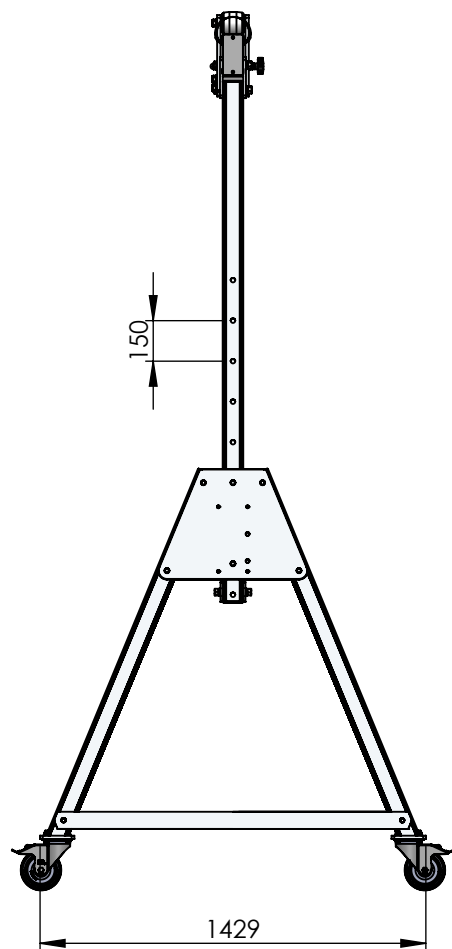

DO NOT SCALE DRAWING

REVISION

03

REID
LIFTING

www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796

Fax +44(0) 1291 626490

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	BJ	26/10/2020	Anodised
CHK'D			MATERIAL:
APPV'D	CM	09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size Medium
- 2500mm Beam WLL500kg**

DWG NO.

PGSS00500M-2500A

A4

Estimated Weight: 102 kg

1:28

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 0-5mm at centre of span
- Maximum castor surface pressure at full load - 14.95 Mpa
- Assembled gantry weight (excluding trolleys) - 102kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

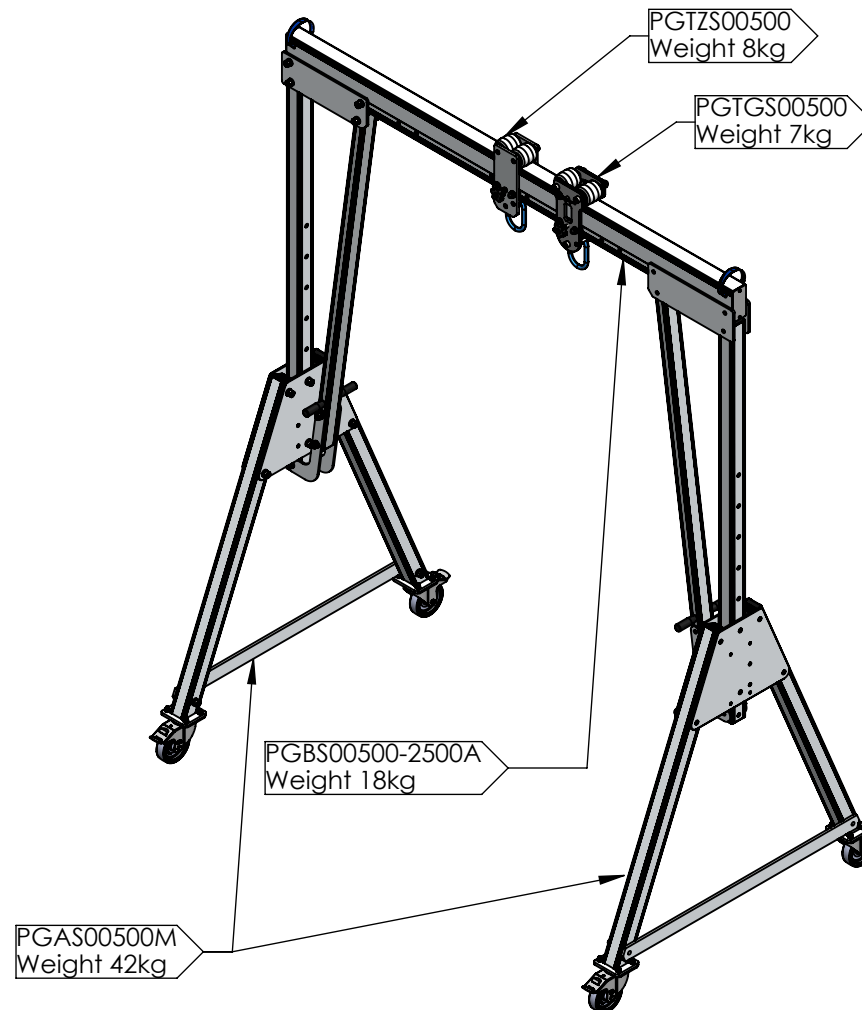

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	26/10/2020
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size Medium
- 2500mm Beam WLL500kg**

DWG NO.



PGSS00500M-2500A

A4

Estimated Weight: 102 kg

1:30

SHEET 2 OF 2

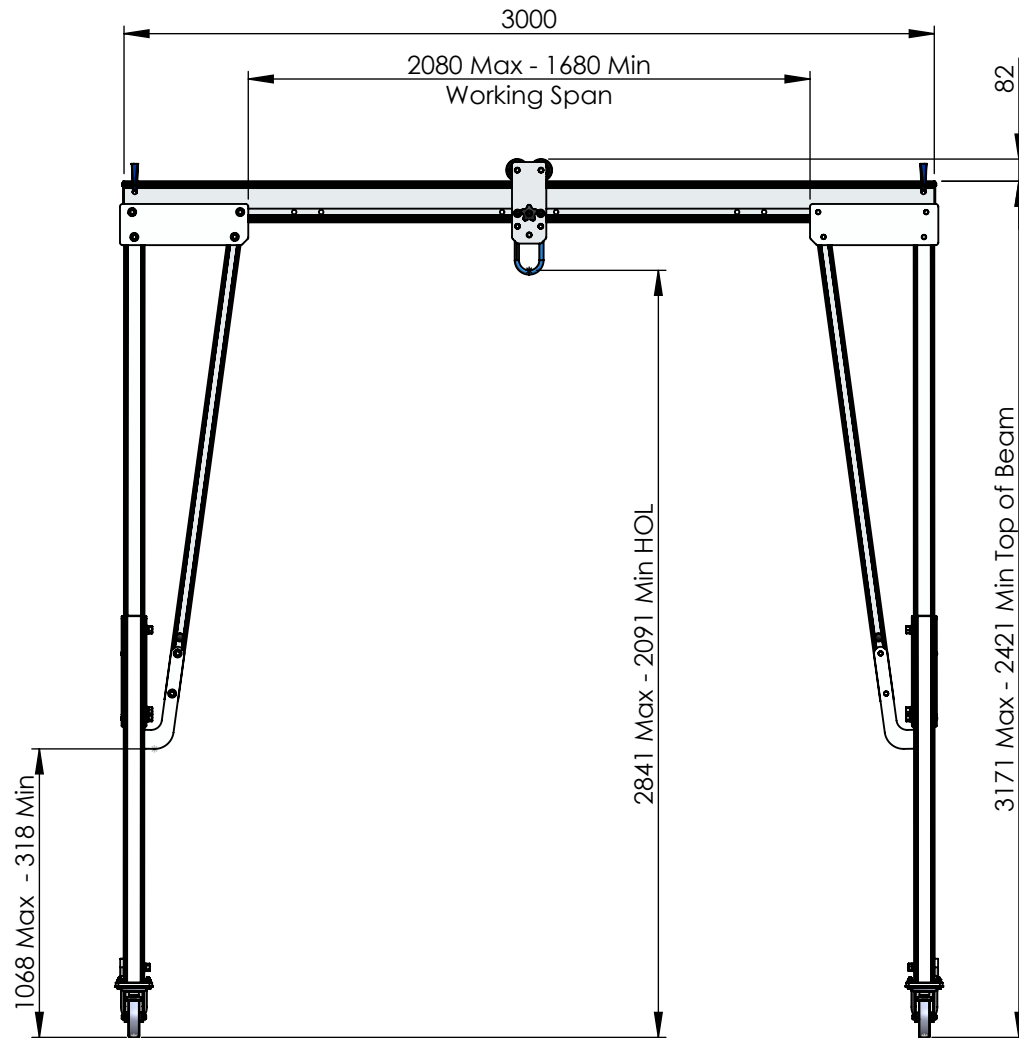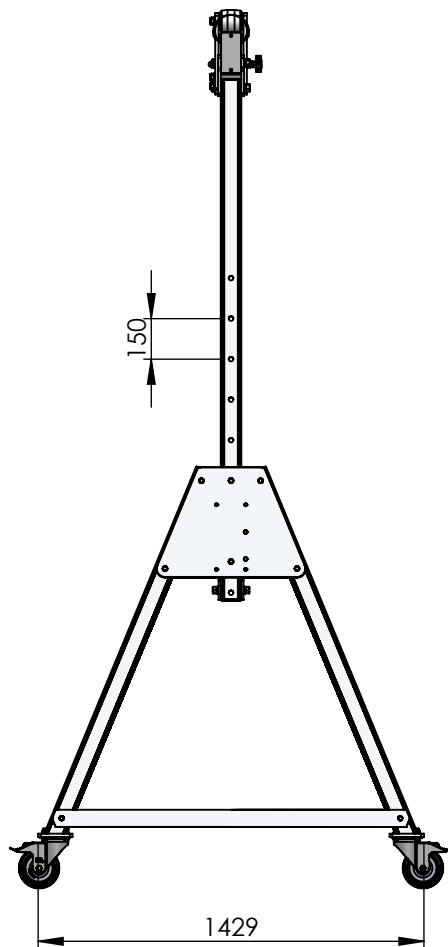

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		09/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size Medium - 3000mm Beam WLL500kg	
DWG NO.	PGSS00500M-3000A		A4
Estimated Weight:	106 kg	1:28	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 0-5mm at centre of span
- Maximum castor surface pressure at full load - 15.00 Mpa
- Assembled gantry weight (excluding trolleys) - 106kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

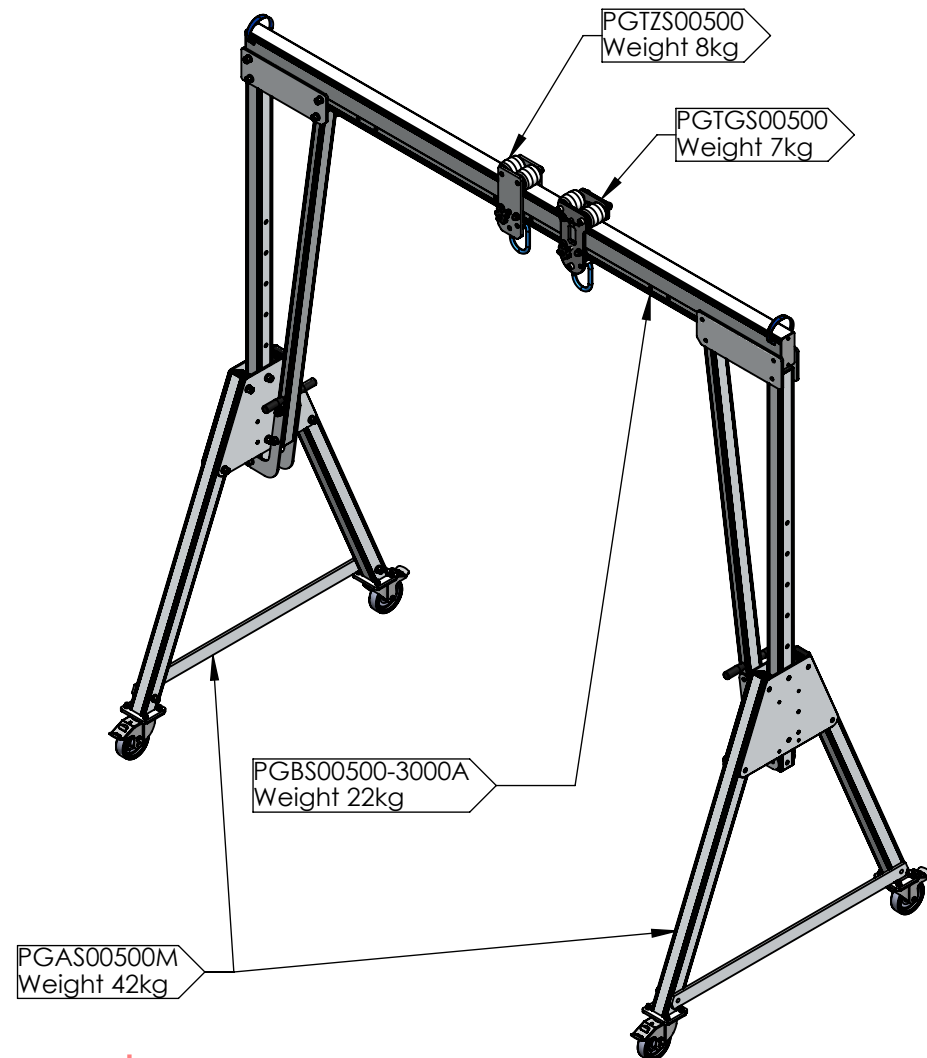

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Medium - 3000mm Beam WLL500kg**



DWG NO. **PGSS00500M-3000A**

A4

Estimated Weight: 106 kg

1:30

SHEET 2 OF 2

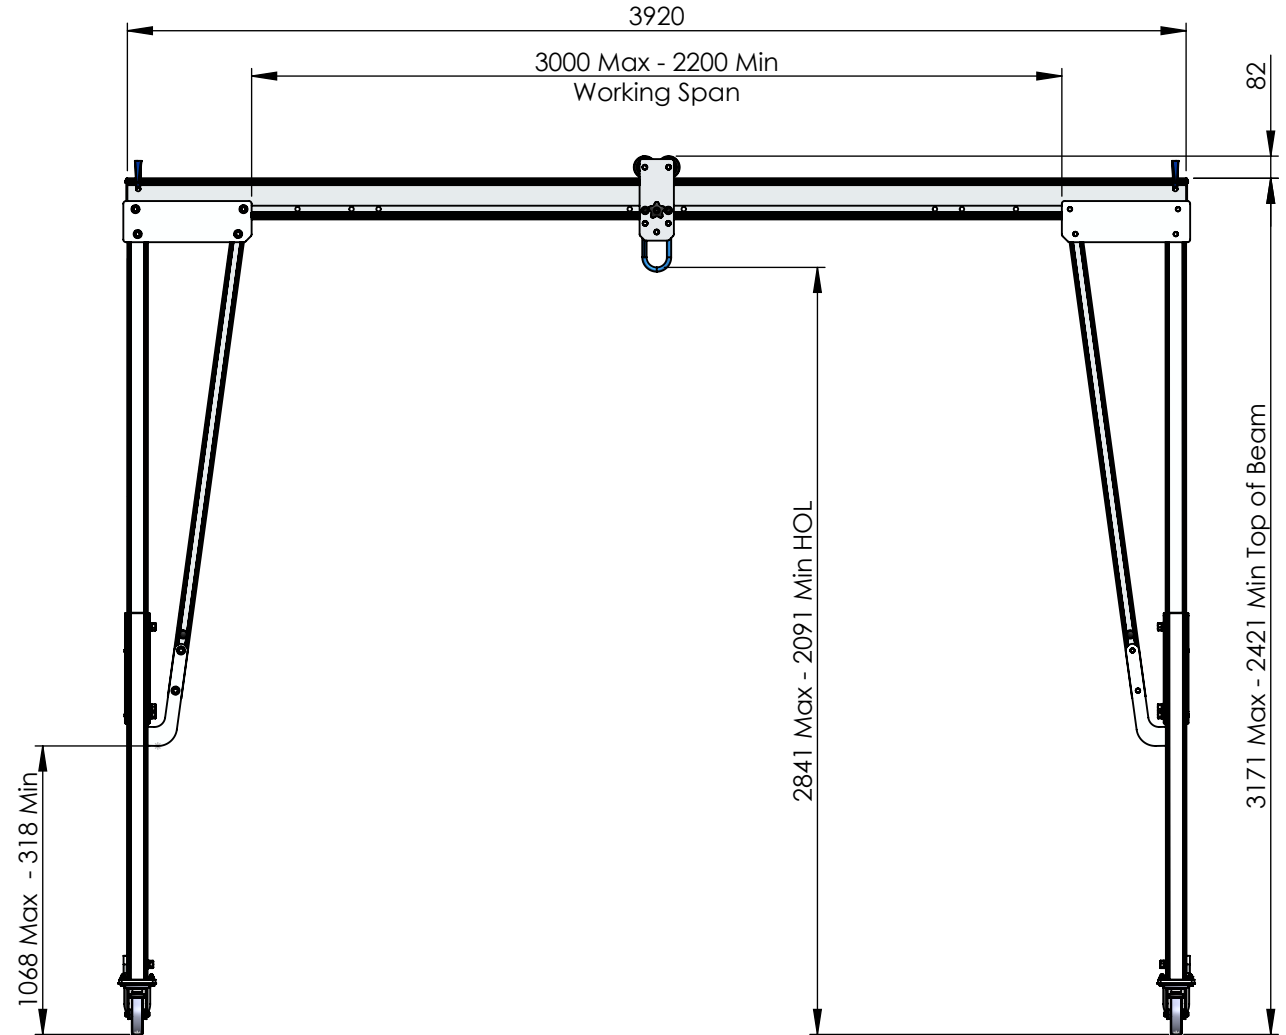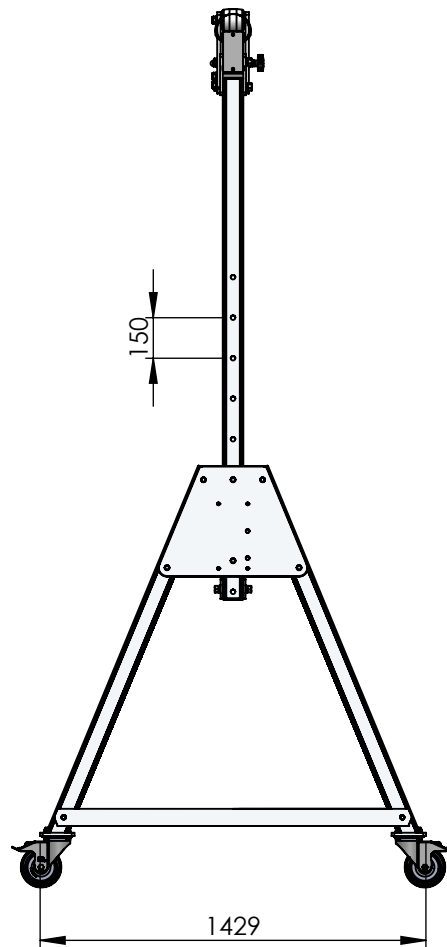

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		09/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size Medium - 3920mm Beam WLL500kg	
DWG NO.	PGSS00500M-3920A		A4
Estimated Weight:	113 kg	1:28	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 5-10mm at centre of span
- Maximum castor surface pressure at full load - 15.09 MPa
- Assembled gantry weight (excluding trolleys) - 113kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

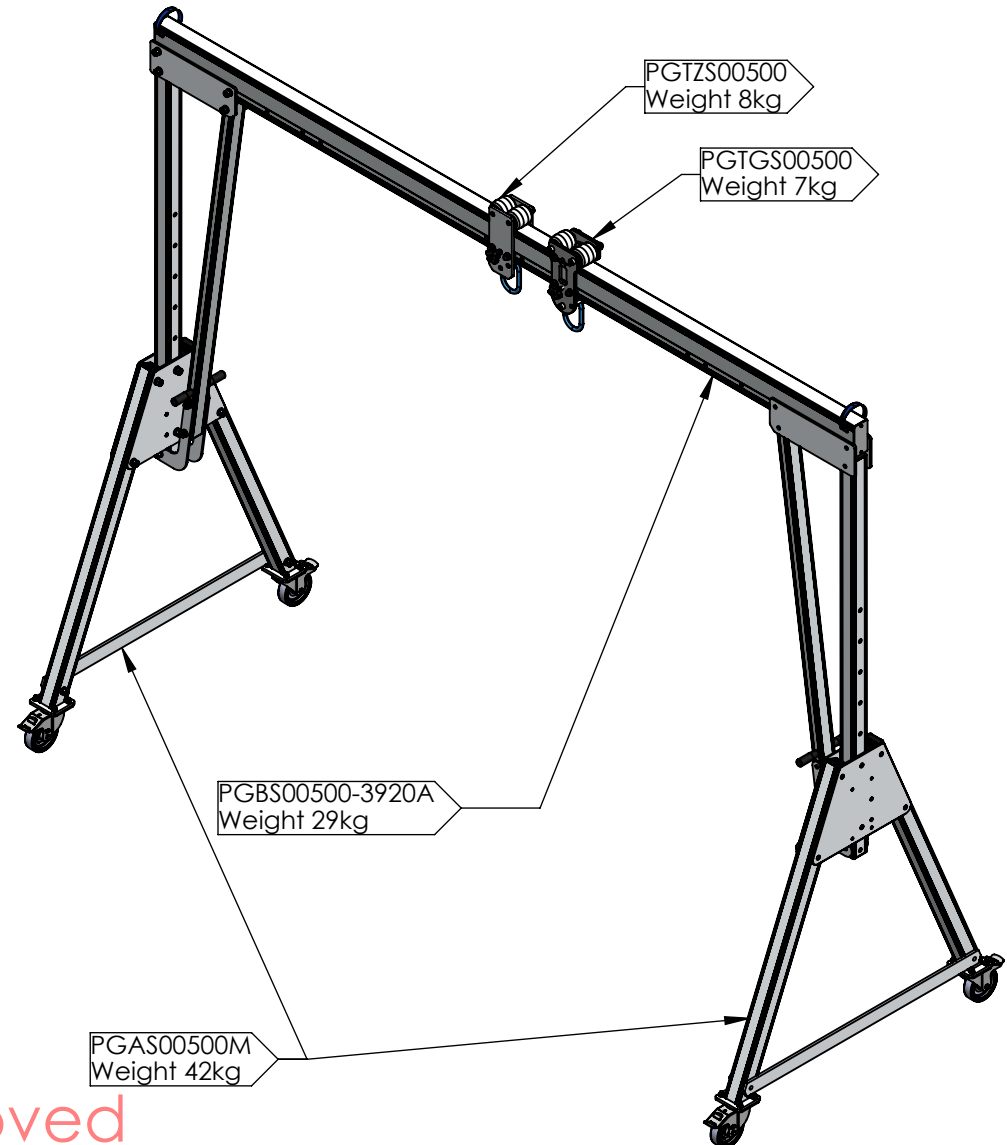

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Medium - 3920mm Beam WLL500kg**


DWG NO. **PGSS00500M-3920A**

A4

Estimated Weight: 113 kg

1:30

SHEET 2 OF 2

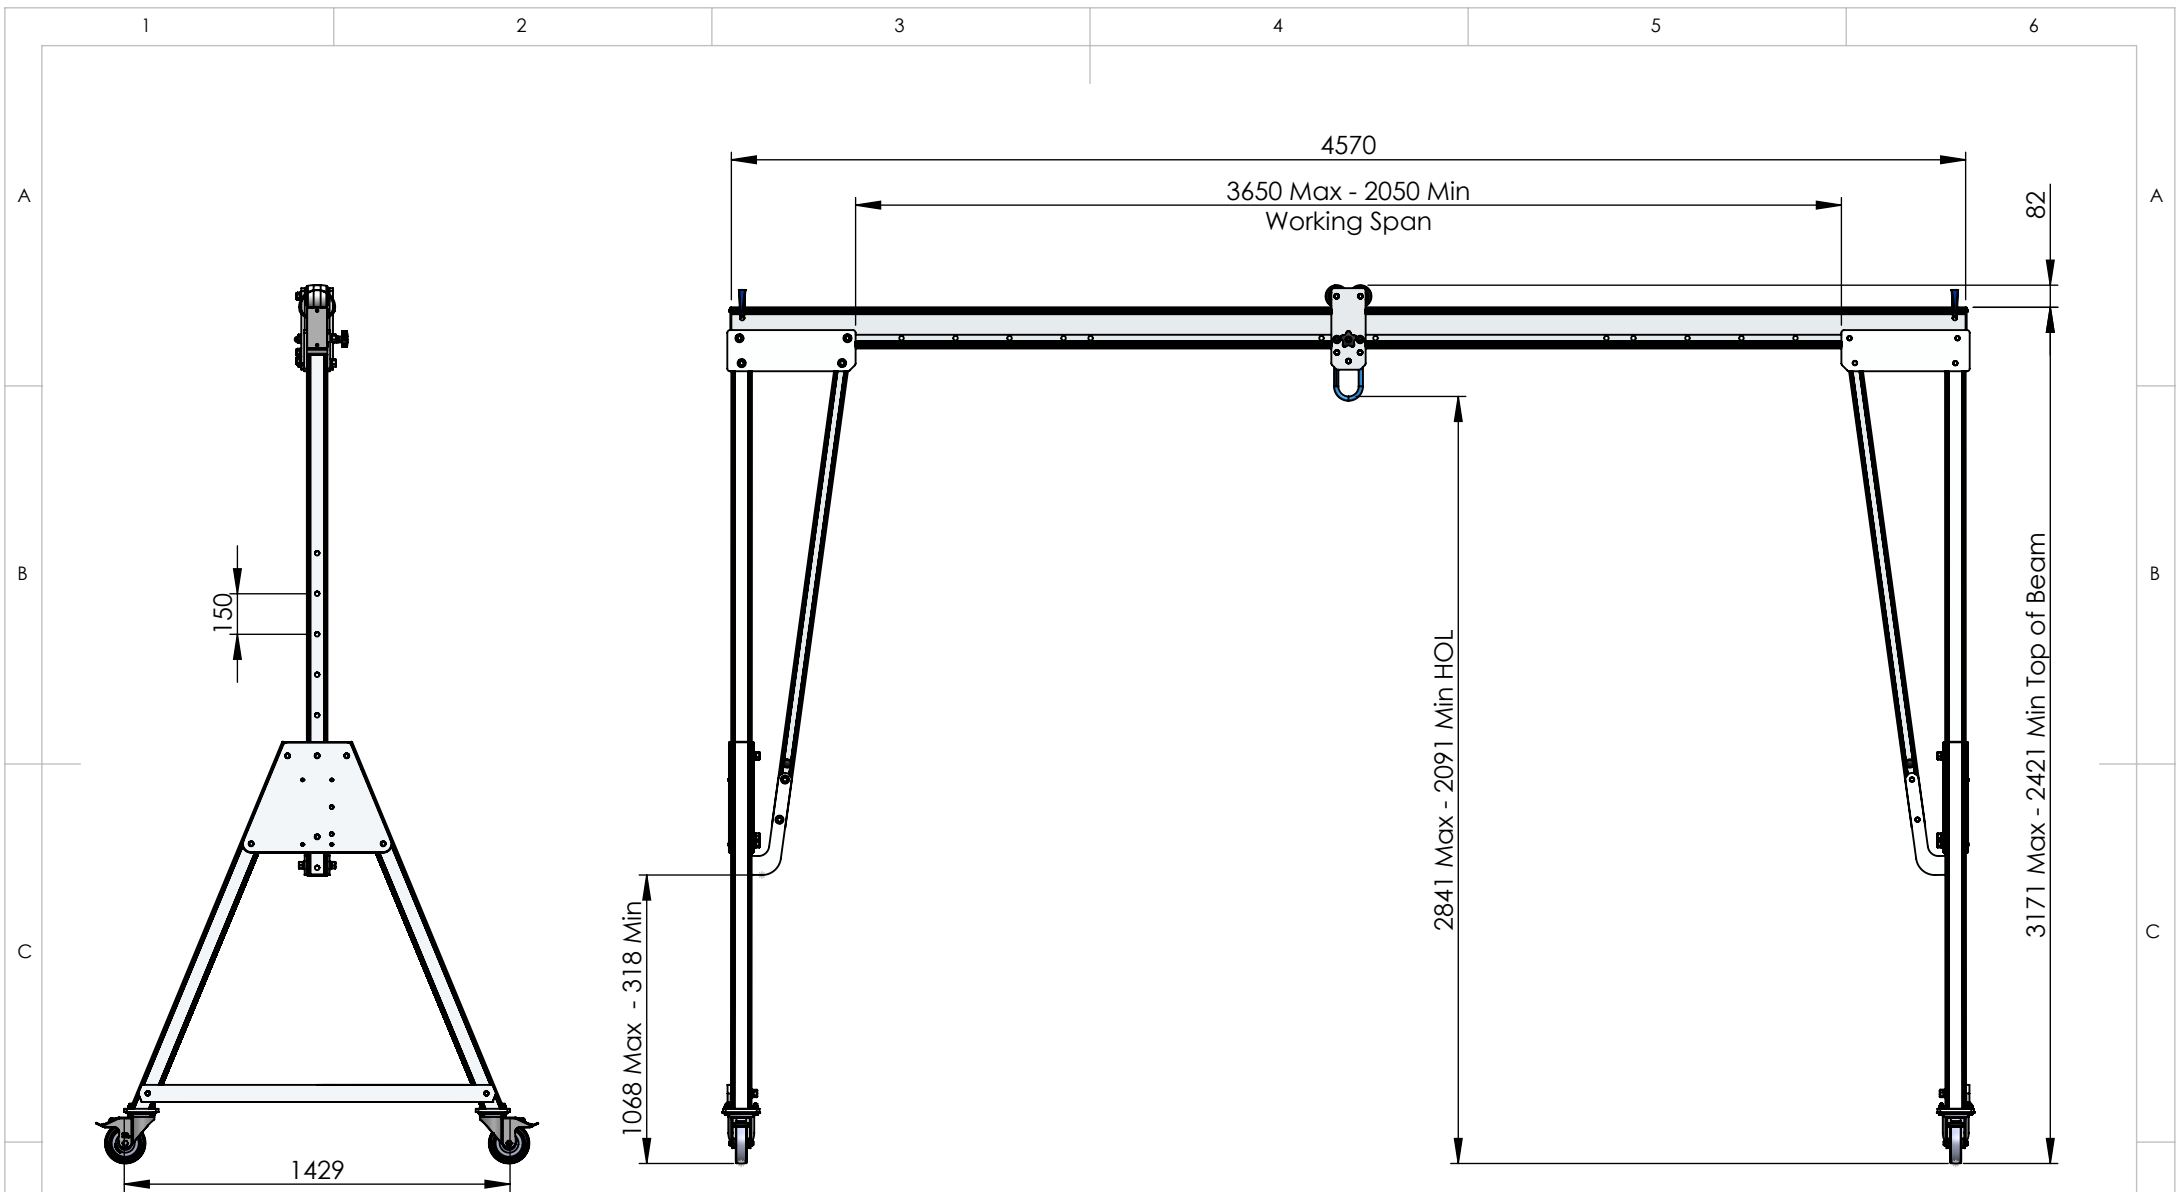

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		09/03/2023	Aluminium Alloy
APPV'D			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			

TITLE:		General Arrangement of REID Lifting Porta-Gantry Size Medium - 4570mm Beam WLL500kg	
DWG NO.		PGSS00500M-4570A	
Estimated Weight:		117 kg	1:28
		SHEET 1 OF 2	

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 10-15mm at centre of span
- Maximum castor surface pressure at full load - 15.15 MPa
- Assembled gantry weight (excluding trolleys) - 117kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

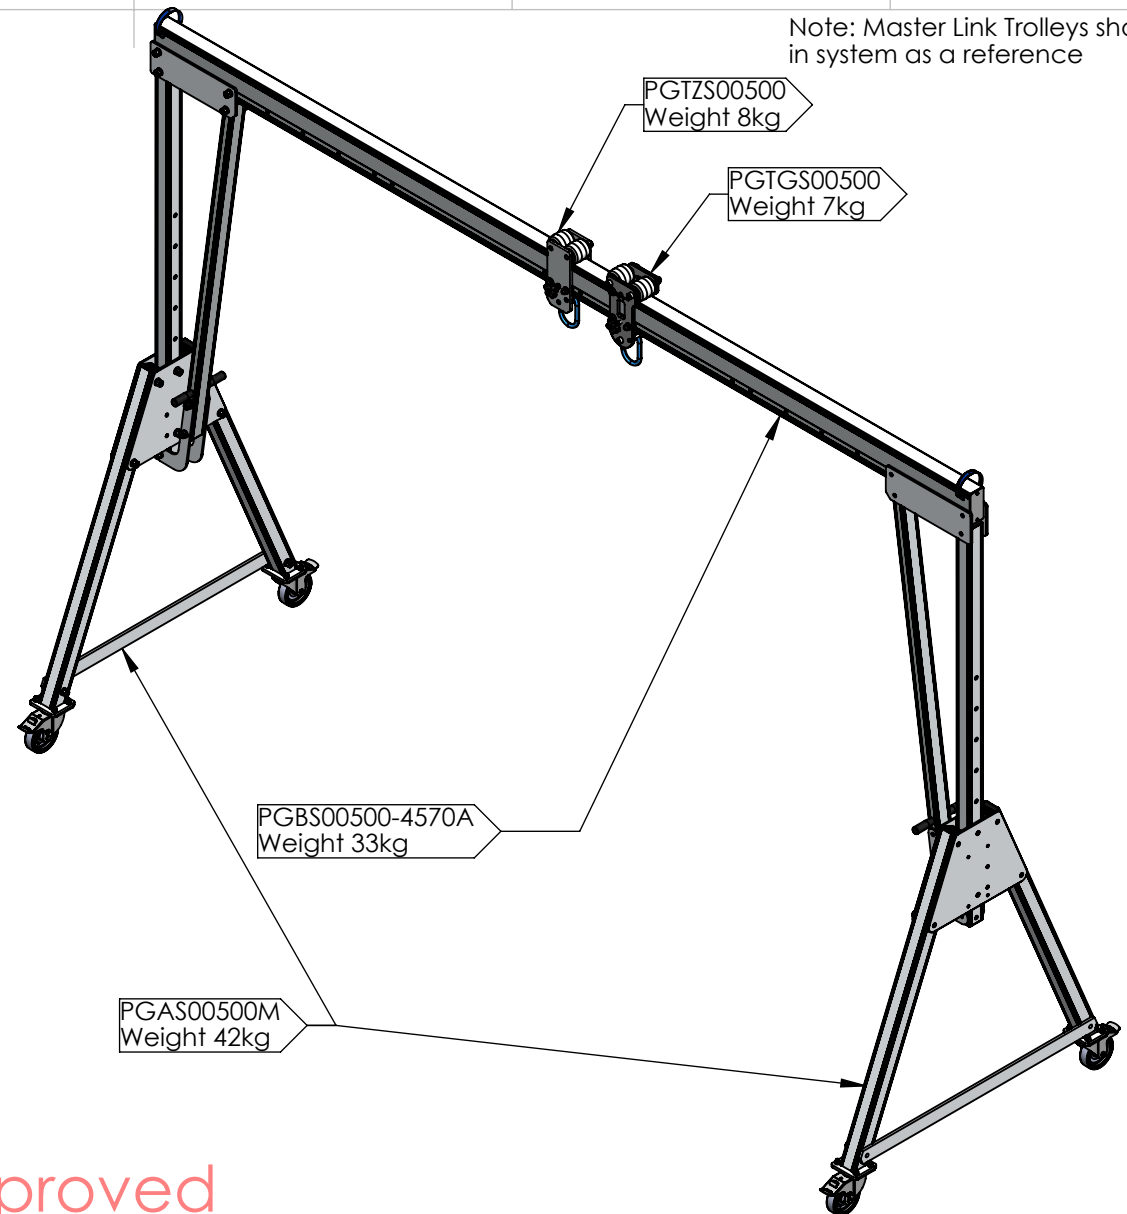

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APP'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Medium - 4570mm Beam WLL500kg**


DWG NO. **PGSS00500M-4570A**

A4

Estimated Weight: 117 kg

1:30

SHEET 2 OF 2

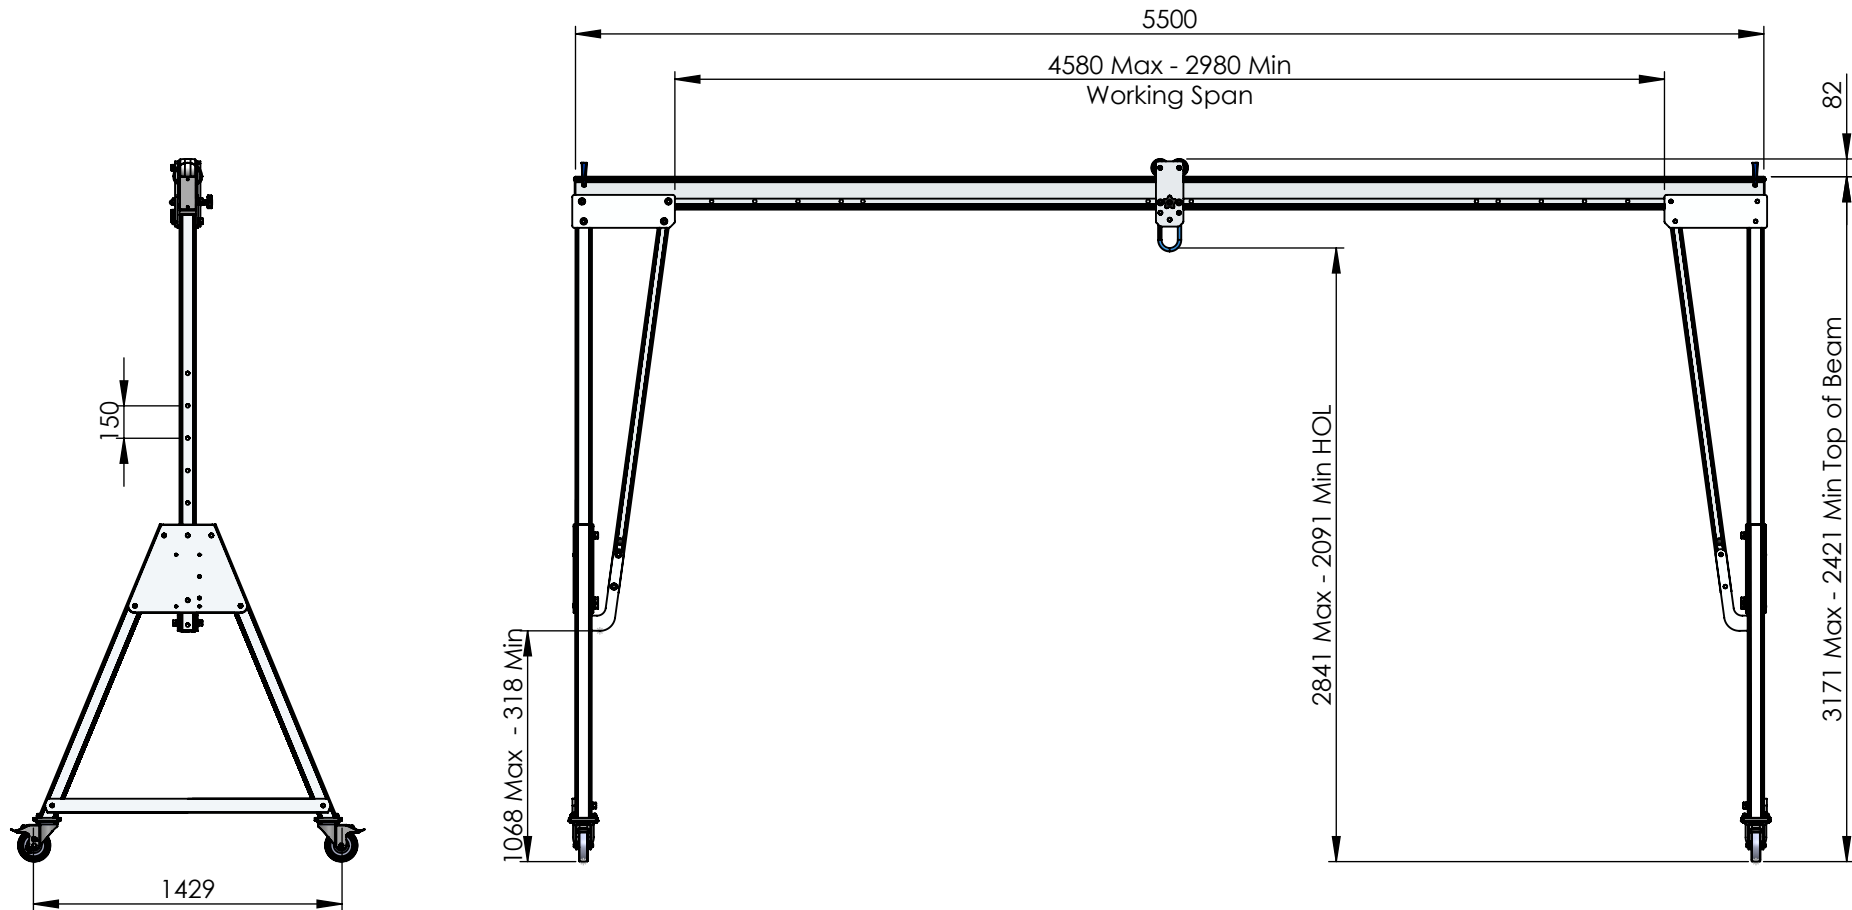

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	TB	25/05/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL:
Aluminium Alloy			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:	General Arrangement of REID Lifting Porta-Gantry Size Medium - 5500mm Beam WLL500kg		
DWG NO.	PGSS00500M-5500A		
Estimated Weight:	124 kg	1:35	SHEET 1 OF 2

A4

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 20-30mm at centre of span
- Maximum castor surface pressure at full load - 15.24 MPa
- Assembled gantry weight (excluding trolleys) - 124kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

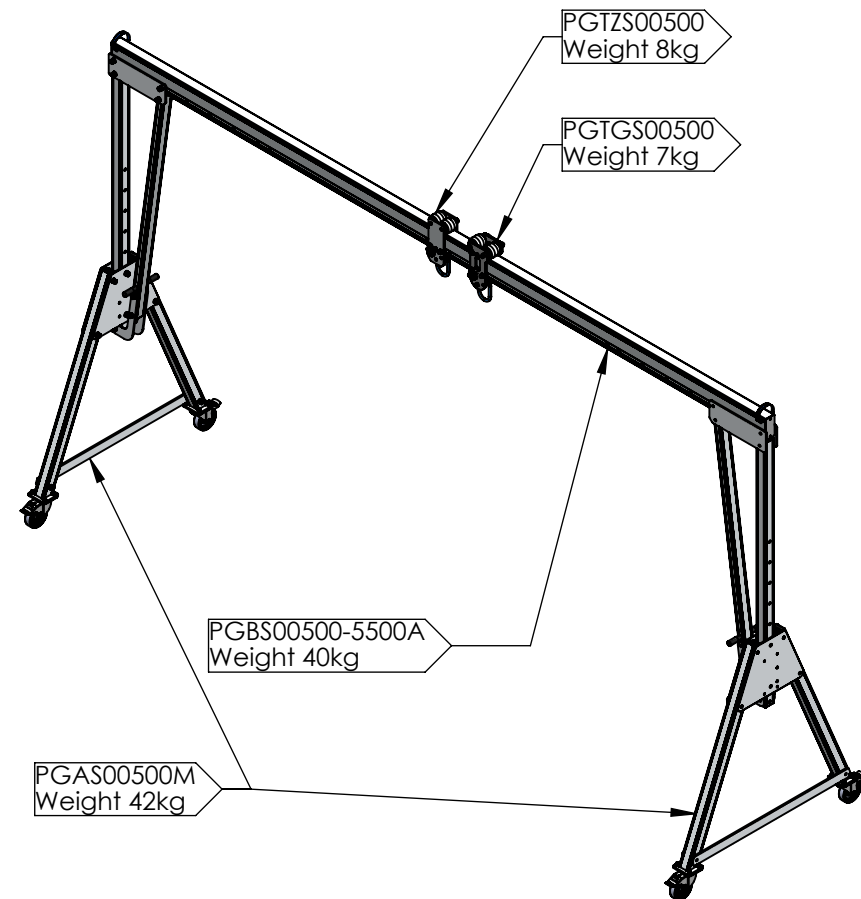

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Medium - 5500mm Beam WLL500kg**


DWG NO. **PGSS00500M-5500A**

A4

Estimated Weight: 124 kg

1:45

SHEET 2 OF 2

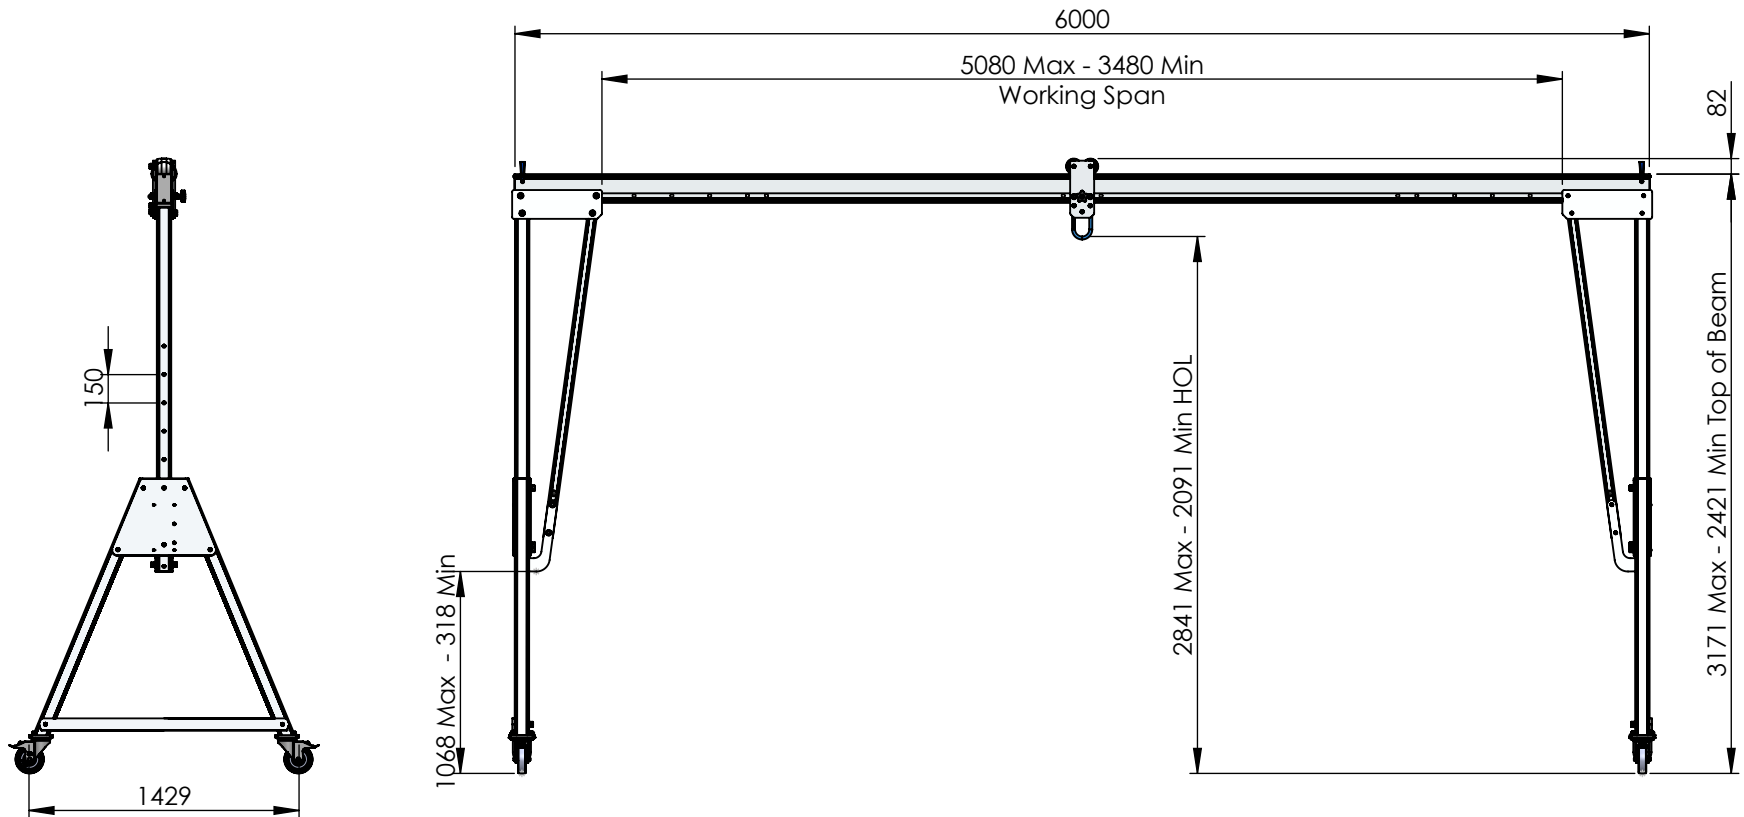

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		09/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size Medium - 6000mm Beam WLL500kg	
DWG NO.	PGSS00500M-6000A		A4
Estimated Weight:	128 kg	1:40	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 25-35mm at centre of span
- Maximum castor surface pressure at full load - 15.29 MPa
- Assembled gantry weight (excluding trolleys) - 128kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

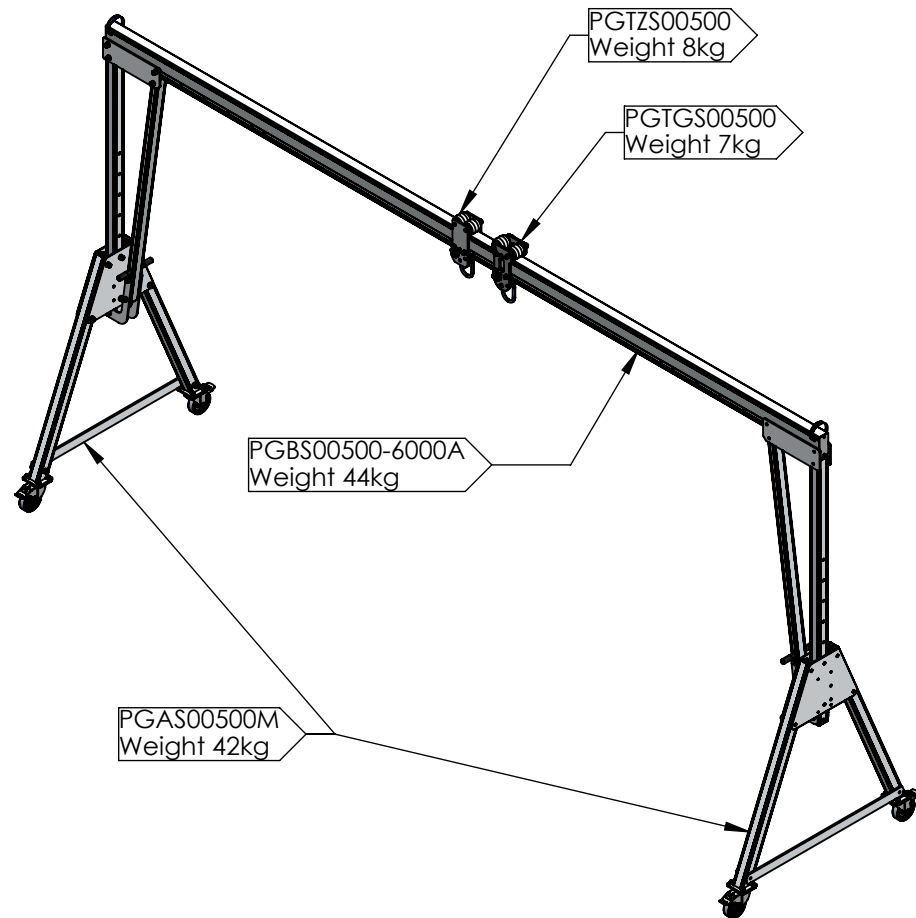

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Medium - 6000mm Beam WLL500kg**


DWG NO. **PGSS00500M-6000A**

A4

Estimated Weight: 128 kg

1:45

SHEET 2 OF 2

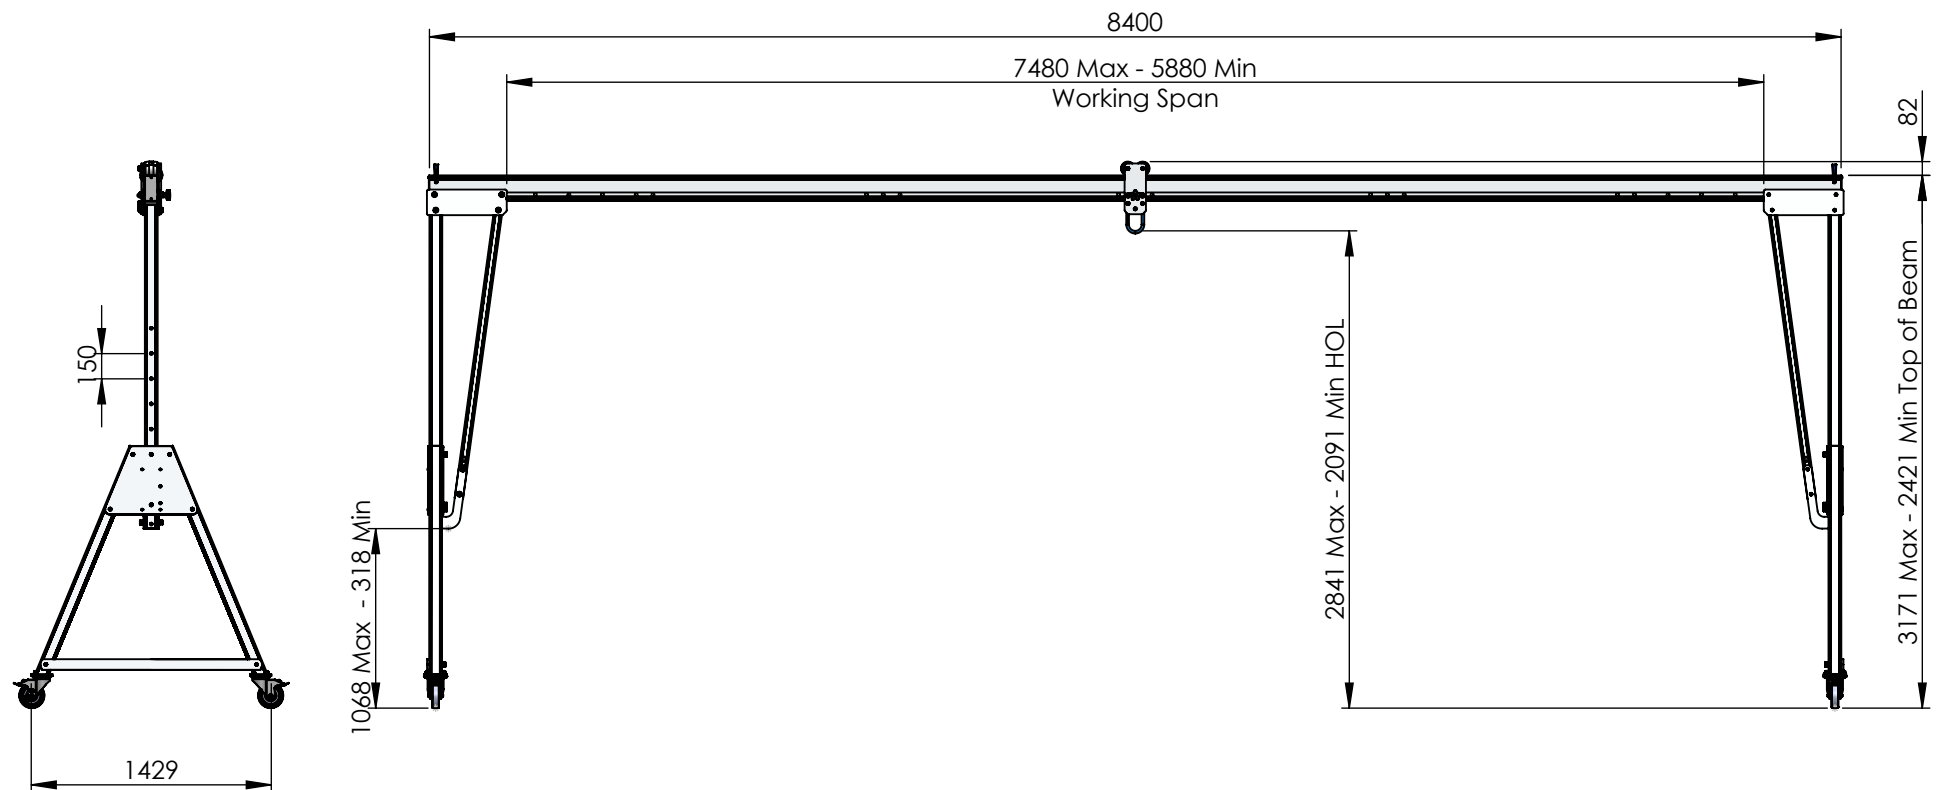

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D	NAME	DATE	MATERIAL:
CM		09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size Medium - 8400mm Beam WLL500kg	
DWG NO.	PGSS00500M-8400A		A4
Estimated Weight:	145 kg	1:45	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 60-70mm at centre of span
- Maximum castor surface pressure at full load - 15.53 MPa
- Assembled gantry weight (excluding trolleys) - 145kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

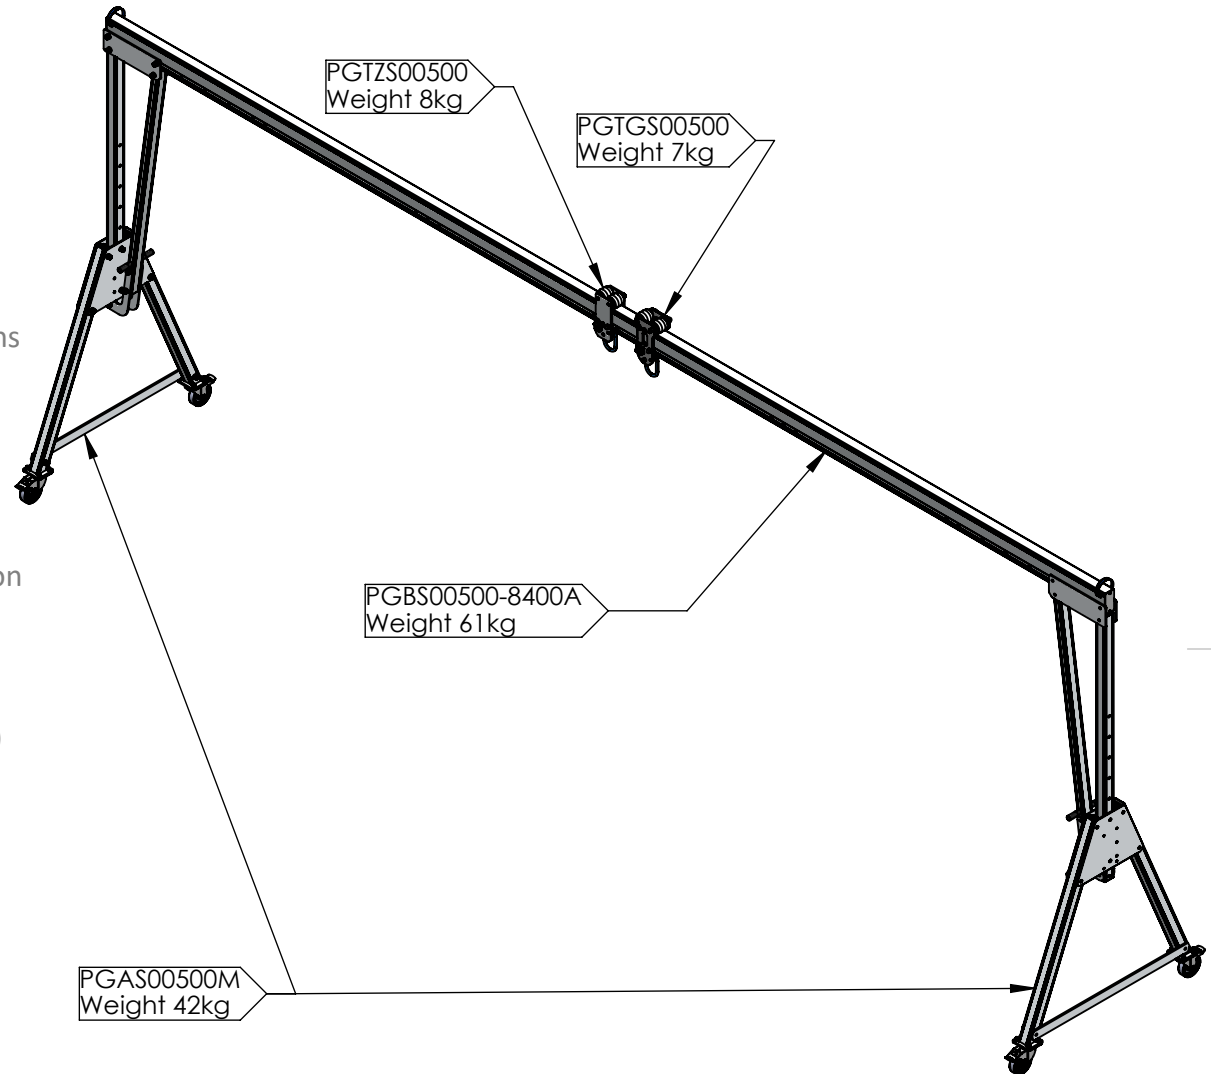

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size Medium
- 8400mm Beam WLL500kg**


DWG NO. **PGSS00500M-8400A**

A4

Estimated Weight: 145 kg

1:45

SHEET 2 OF 2

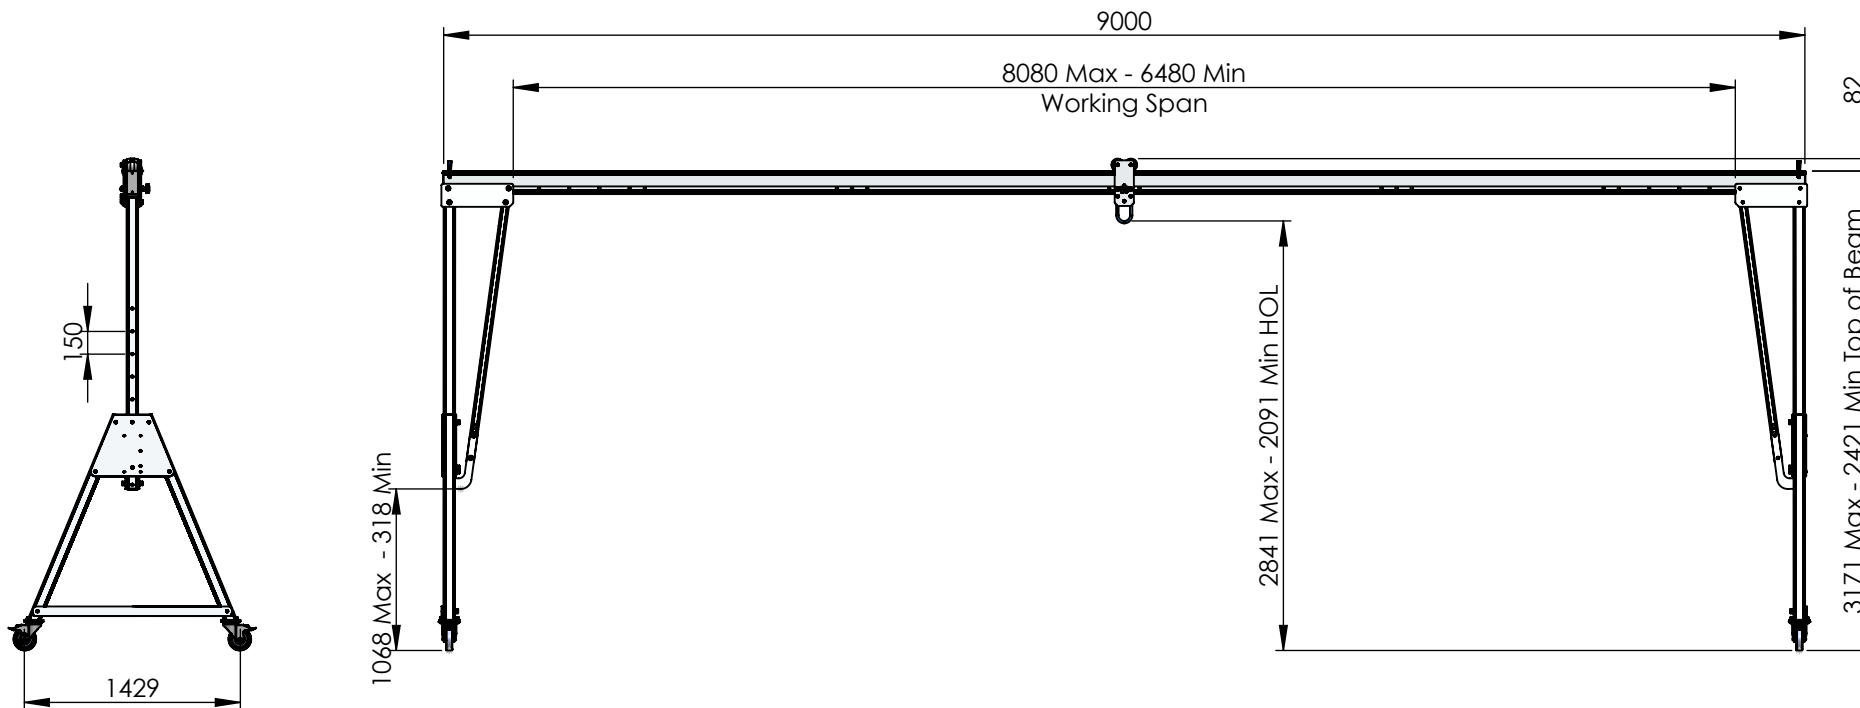

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D	NAME	DATE	MATERIAL:
CM		09/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:
**General Arrangement of REID
Lifting Porta-Gantry Size Medium
- 9000mm Beam WLL500kg**

DWG NO.

PGSS00500M-9000A

A4

Estimated Weight: 150 kg

1:50

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 80-90mm at centre of span
- Maximum castor surface pressure at full load - 15.58 MPa
- Assembled gantry weight (excluding trolleys) - 150kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

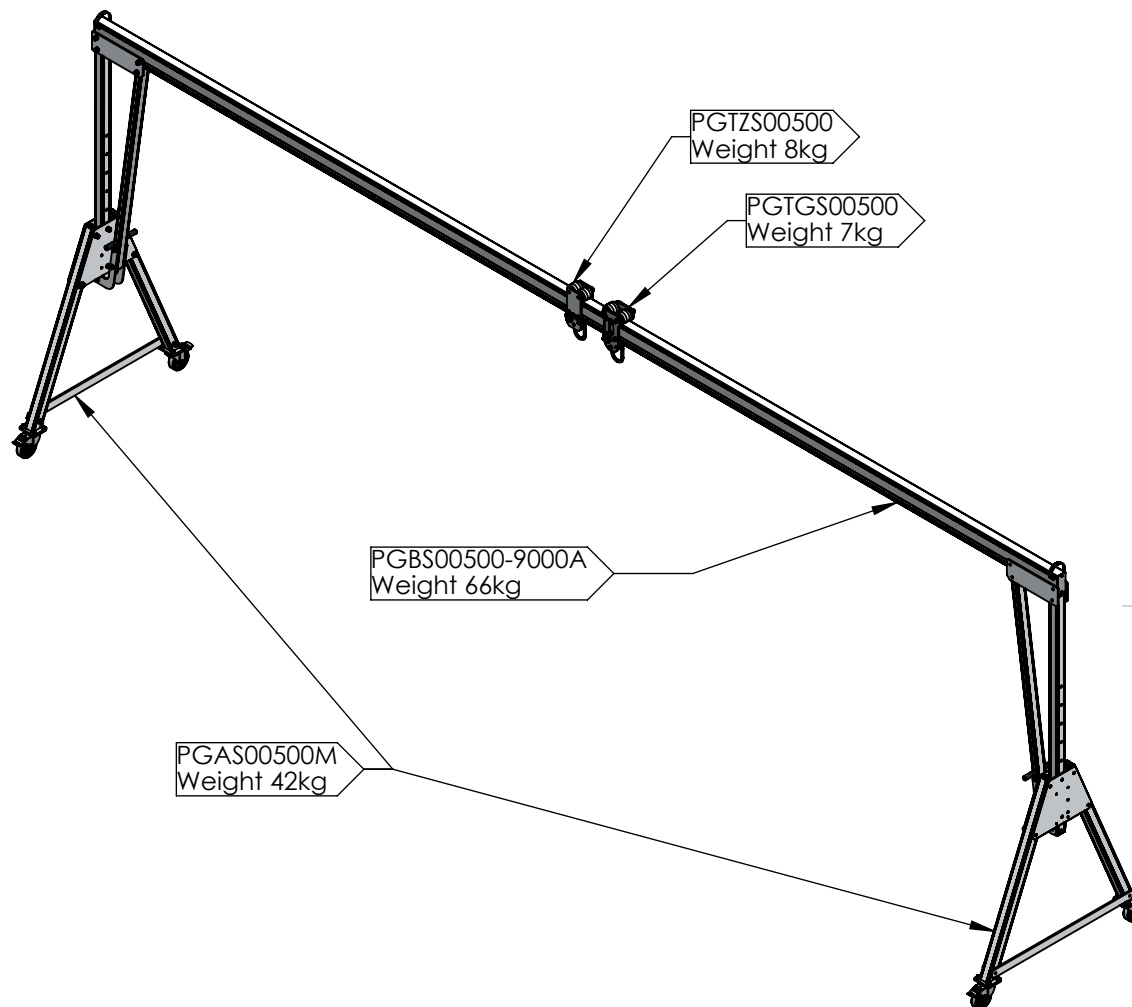

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size Medium
- 9000mm Beam WLL500kg**



DWG NO. **PGSS00500M-9000A**

A4

Estimated Weight: 150 kg

1:50

SHEET 2 OF 2

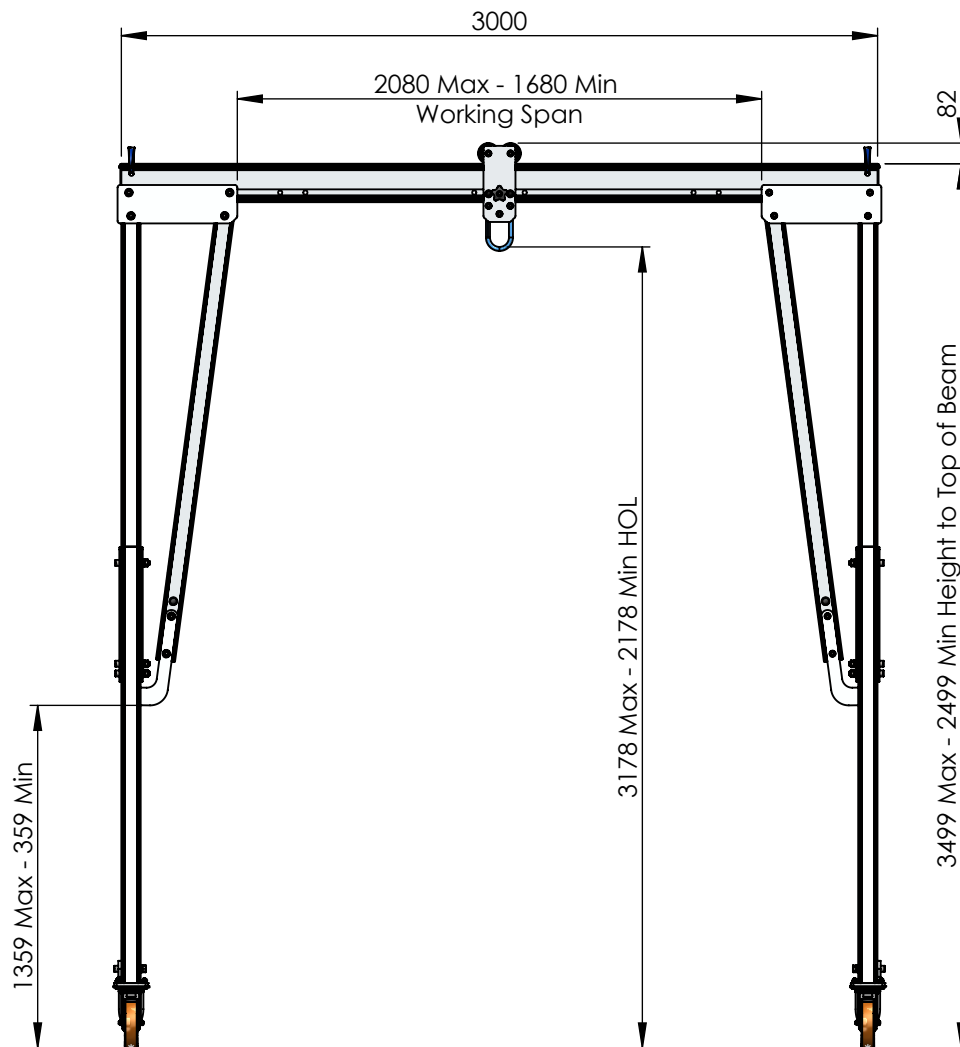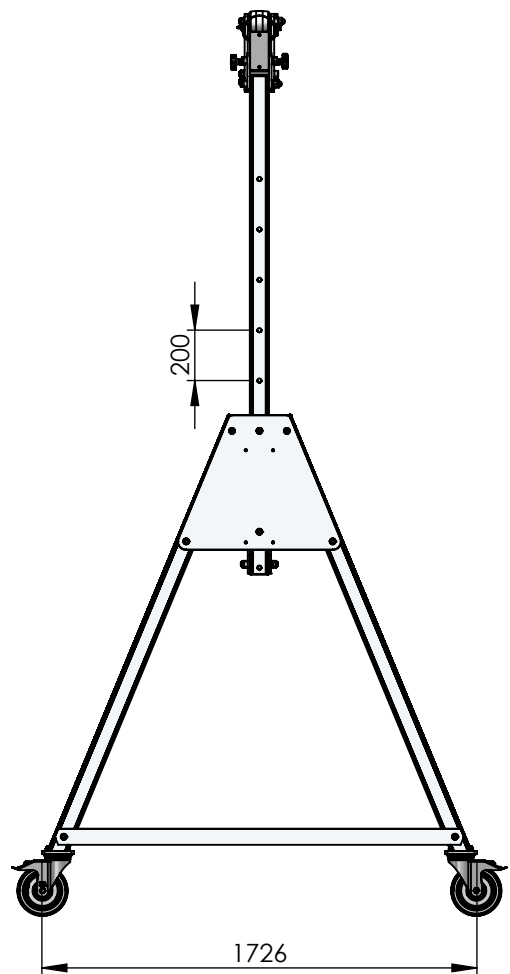

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	BJ	26/10/2020	Galvanised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size
Intermediate - 3000mm Beam**

DWG NO.

PGSS00500I-3000A

A4

Estimated Weight: 122kg

1:30

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 0 - 5mm at centre of span
- Maximum castor surface pressure at full load - 12.48 Mpa
- Assembled gantry weight (excluding trollies) - 122kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown is system as a reference

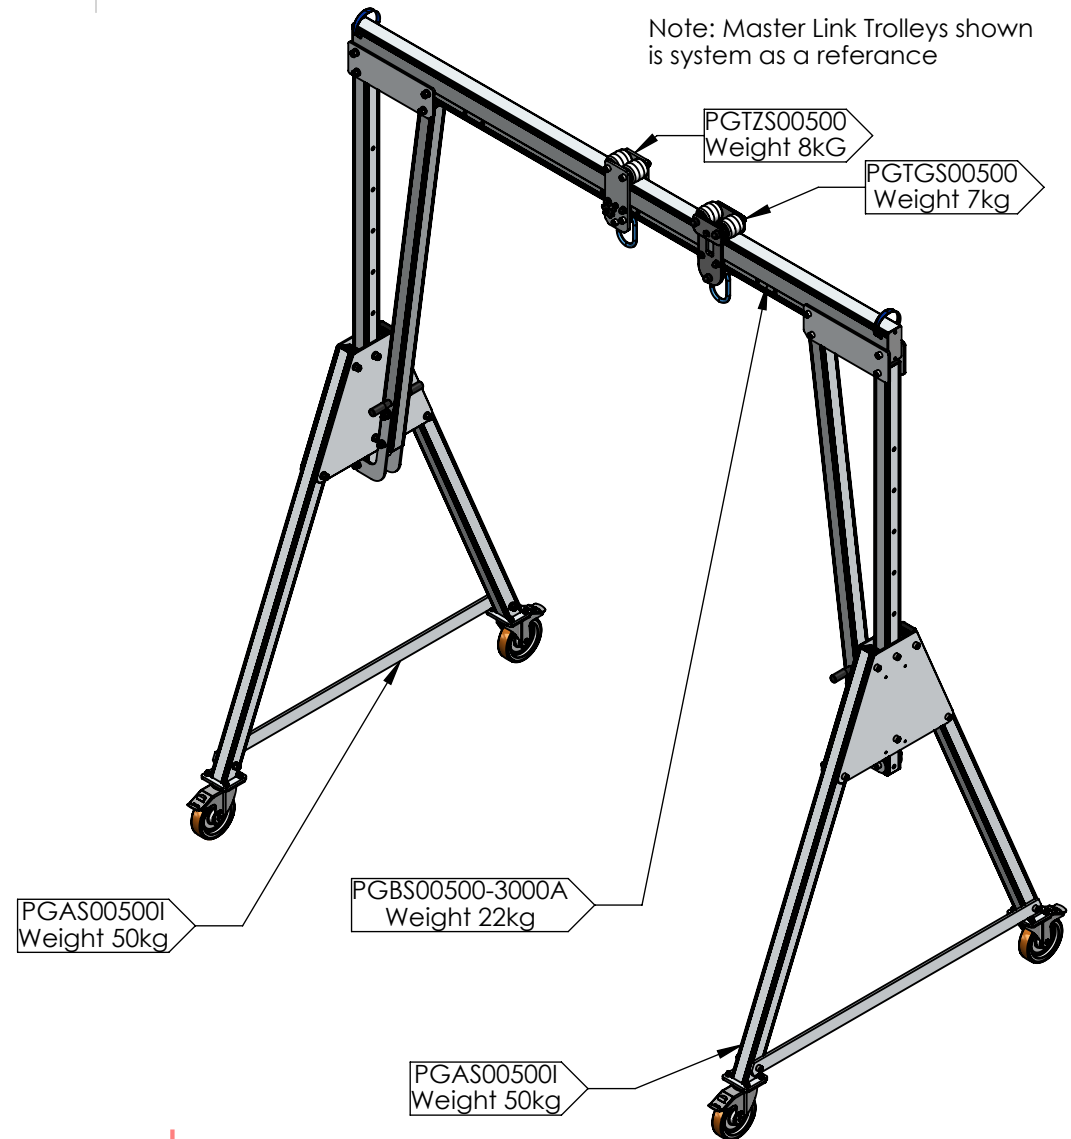

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	26/10/2020
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Intermediate - 3000mm Beam**

DWG NO.


PGSS00500I-3000A

A4

Estimated Weight: 122kg

1:30

SHEET 2 OF 2

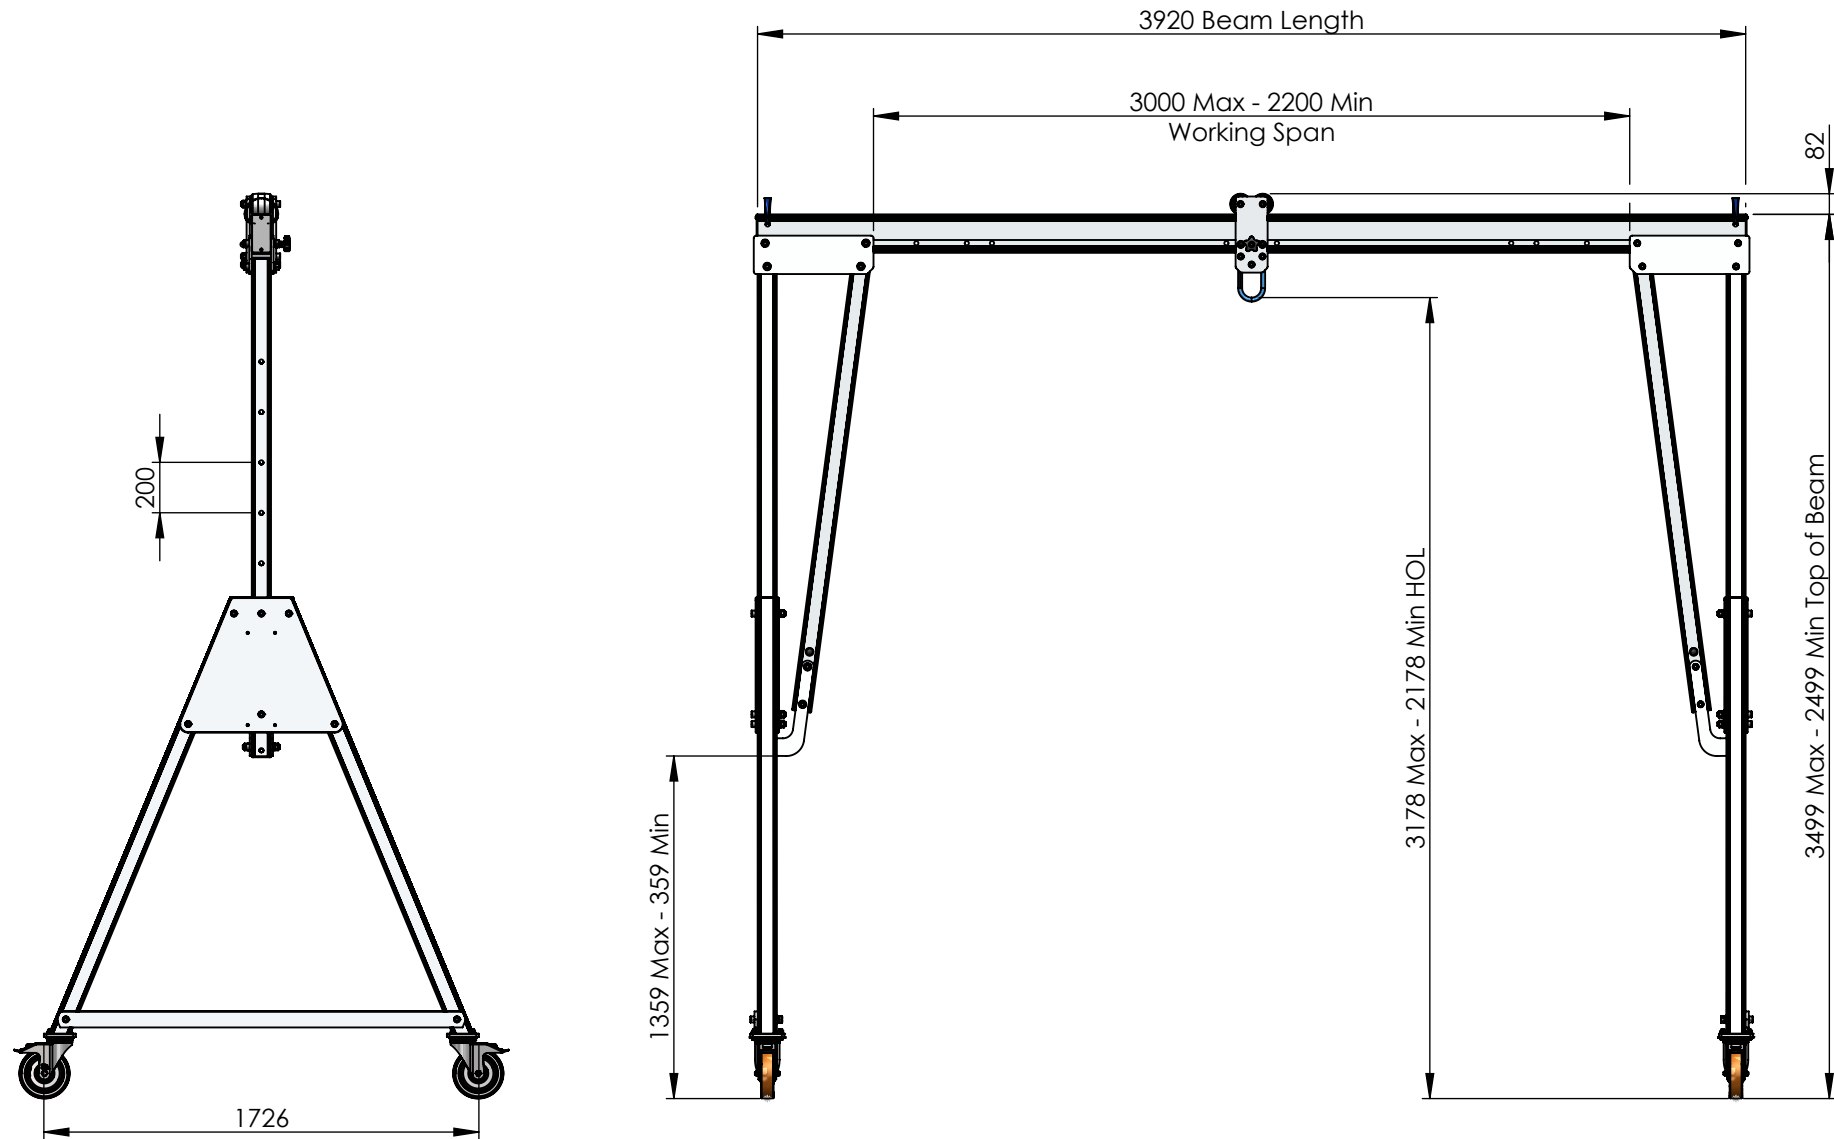

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	BJ	26/06/2020	Anodised
APPV'D	CM	09/0	MATERIAL:
UNLESS OTHERWISE SPECIFIED:			Aluminium Alloy
DIMENSIONS ARE IN MILLIMETERS			

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of Reid Lifting PORTA-GANTRY Size Intermediate - 3920mm Beam**

DWG NO.

PGSS00500I-3920A

A4

Estimated Weight: 129kg

1:30

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 5 - 10mm at centre of span
- Maximum castor surface pressure at full load - 12.56 Mpa
- Assembled gantry weight (excluding trollies) - 129kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trollies shown in system as a reference

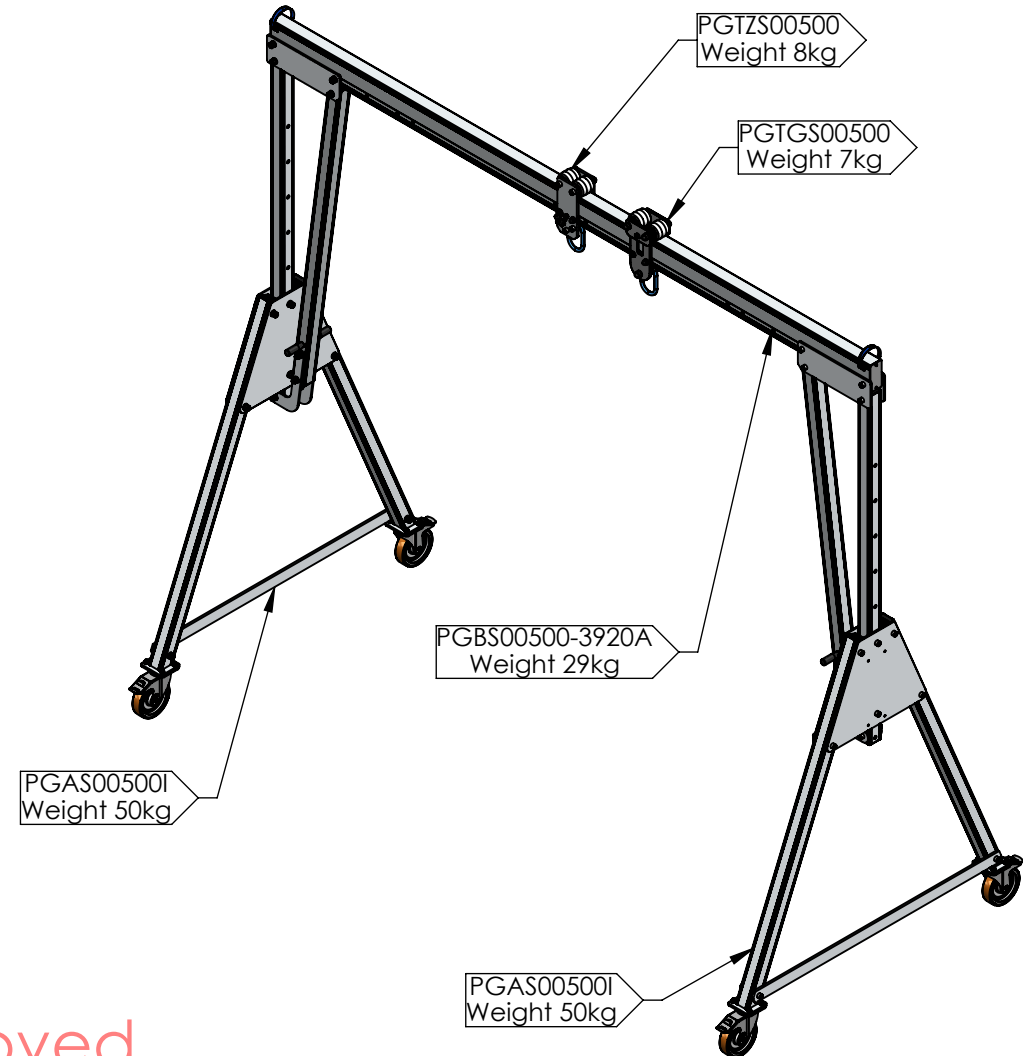

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	26/06/2020
CHK'D		
APP'V'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of Reid Lifting PORTA-GANTRY Size Intermediate - 3920mm Beam**

DWG NO.


PGSS00500I-3920A

A4

Estimated Weight: 129kg

1:35

SHEET 2 OF 2

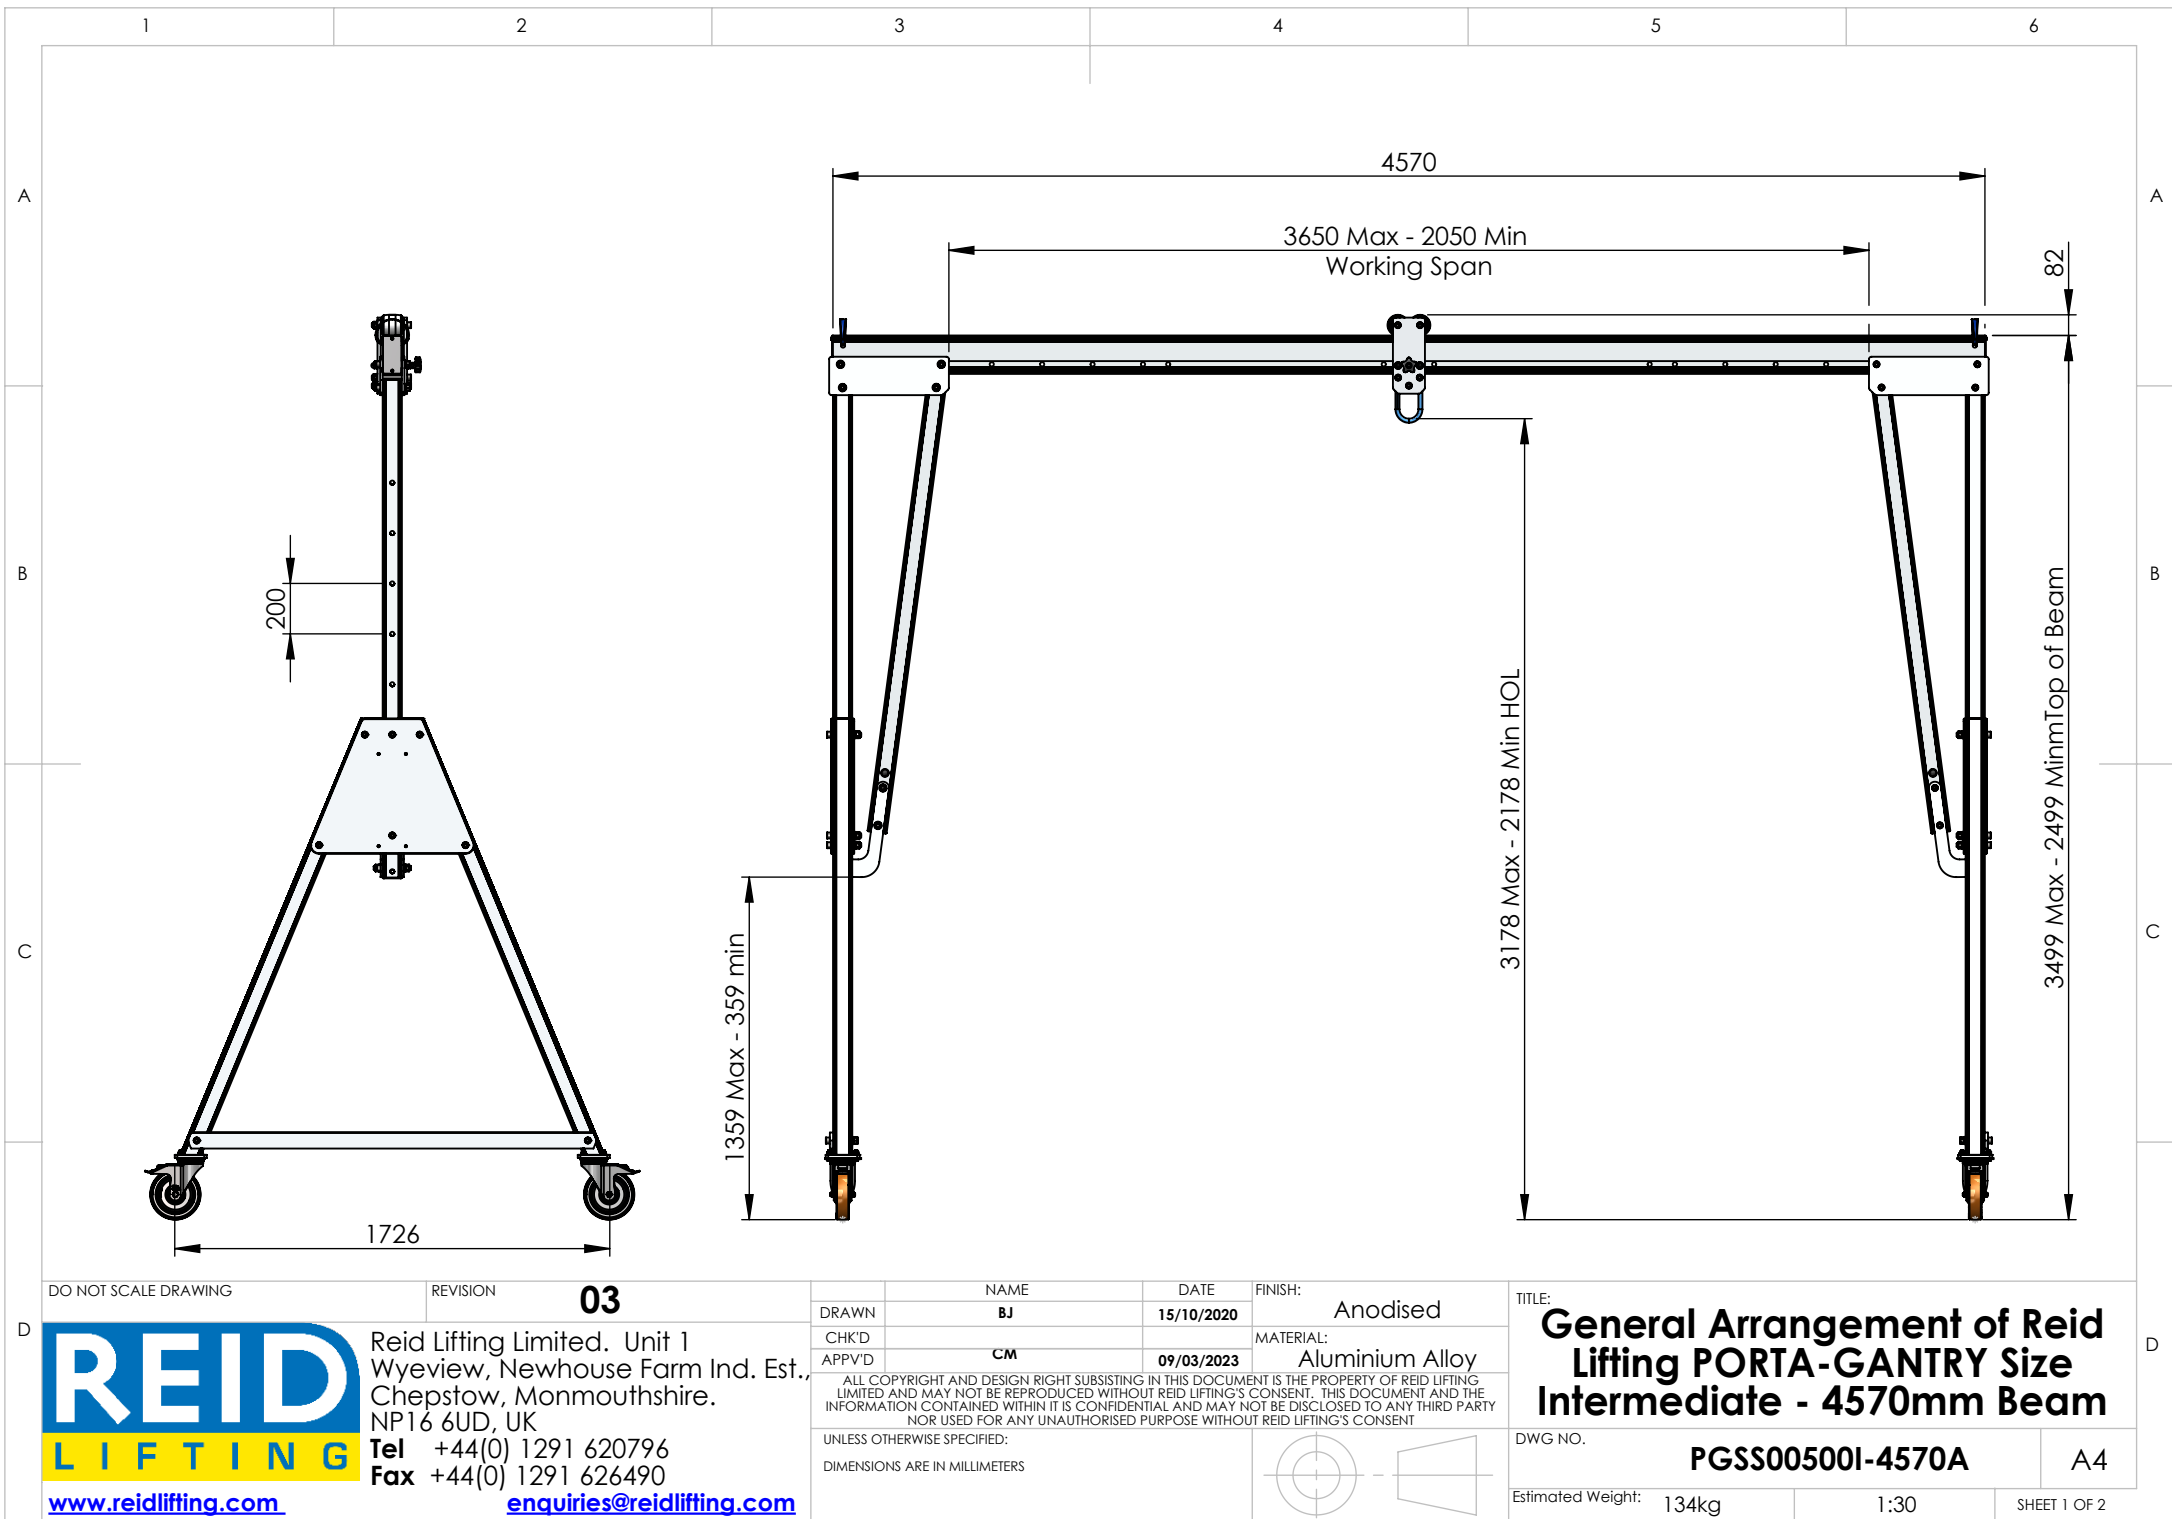

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK
Tel +44(0) 1291 620796
Fax +44(0) 1291 626490
www.reidlifting.com
enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	BJ	15/10/2020	Anodised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			

DWG NO.		PGSS00500I-4570A		A4	
Estimated Weight:		134kg		1:30	
				SHEET 1 OF 2	

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 10 - 15mm at centre of span
- Maximum castor surface pressure at full load - 12.61 Mpa
- Assembled gantry weight (excluding trolleys) - 134kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

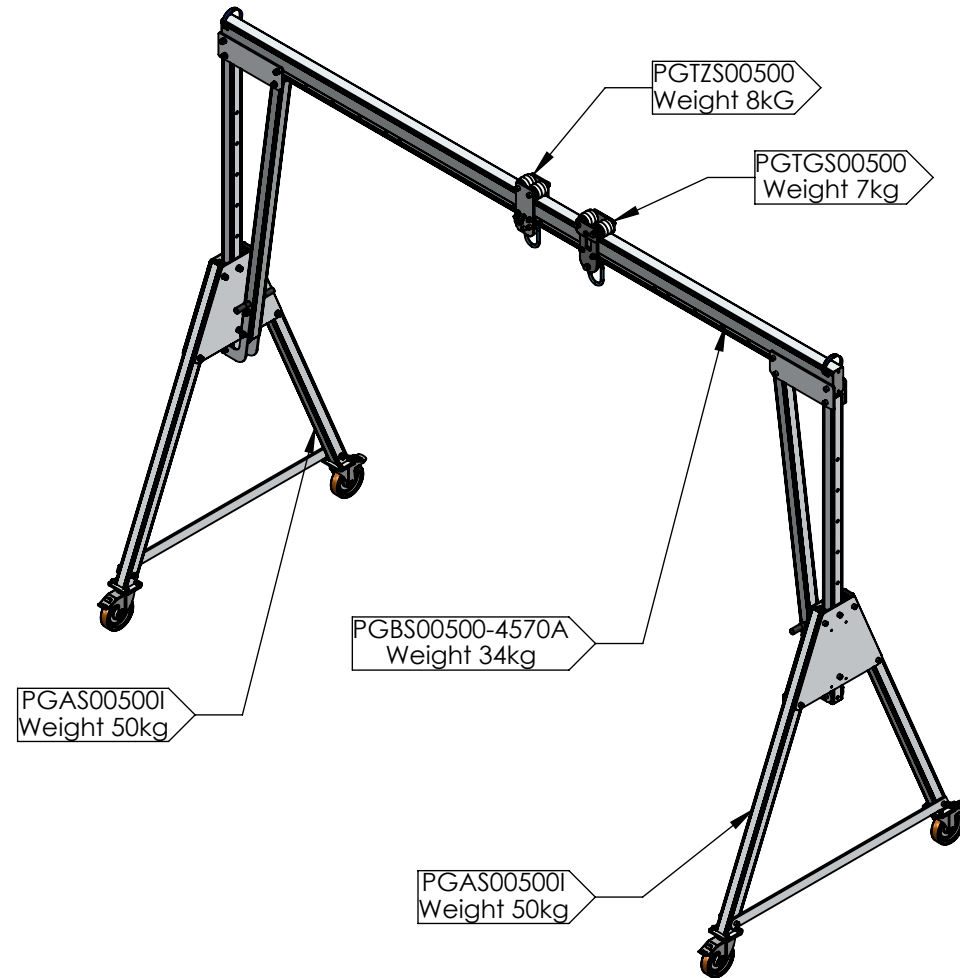

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	15/10/2020
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of Reid Lifting PORTA-GANTRY Size Intermediate - 4570mm Beam**

DWG NO.


PGSS00500I-4570A

A4

Estimated Weight: 134kg

1:40

SHEET 2 OF 2

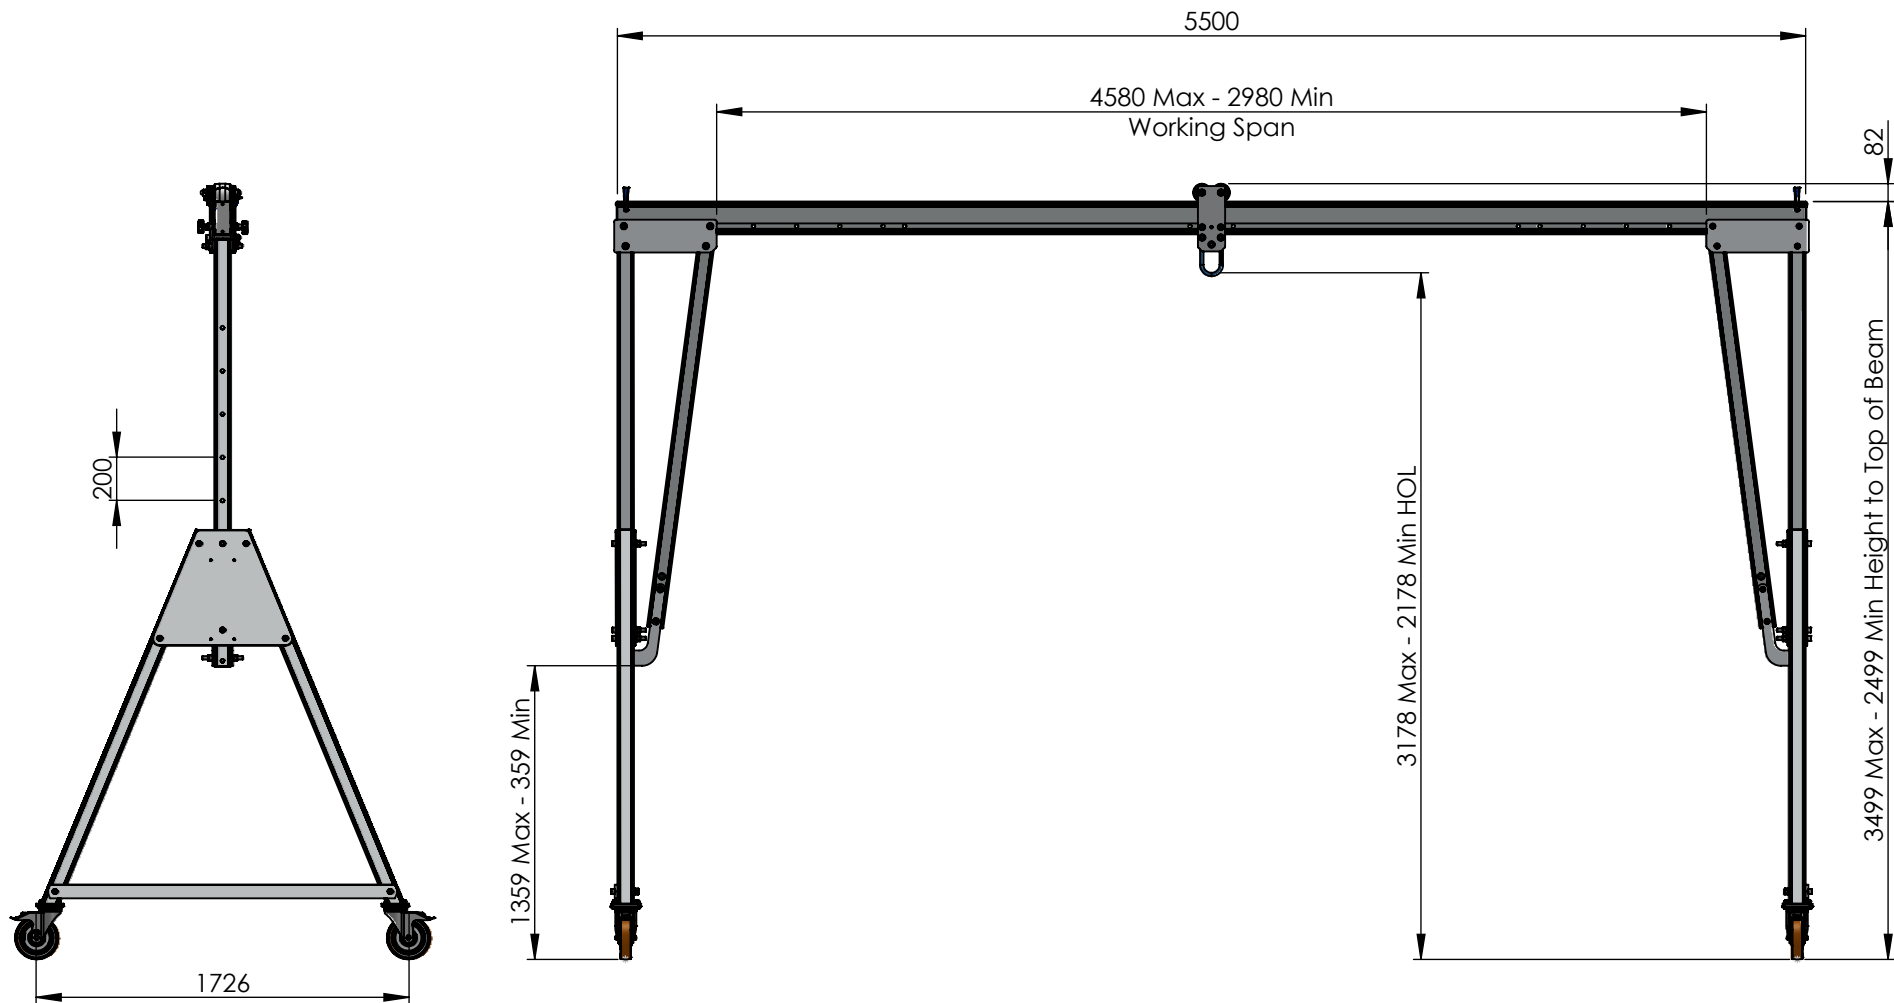

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	TB	12/05/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size:
Intermediate - WLL500kg 5500mm
Beam**

DWG NO. **PGSS00500I-5500A** **A4**

Estimated Weight: 141kg 1:35 SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 20 - 30mm at centre of span
- Maximum castor surface pressure at full load - 12.68 Mpa
- Assembled gantry weight (excluding trolleys) - 141kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.



Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	12/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID Lifting
Porta-Gantry Size: Intermediate -
WLL500kg 5500mm Beam**

DWG NO.


PGSS00500I-5500A

A4

Estimated Weight: 141kg

1:40

SHEET 2 OF 2

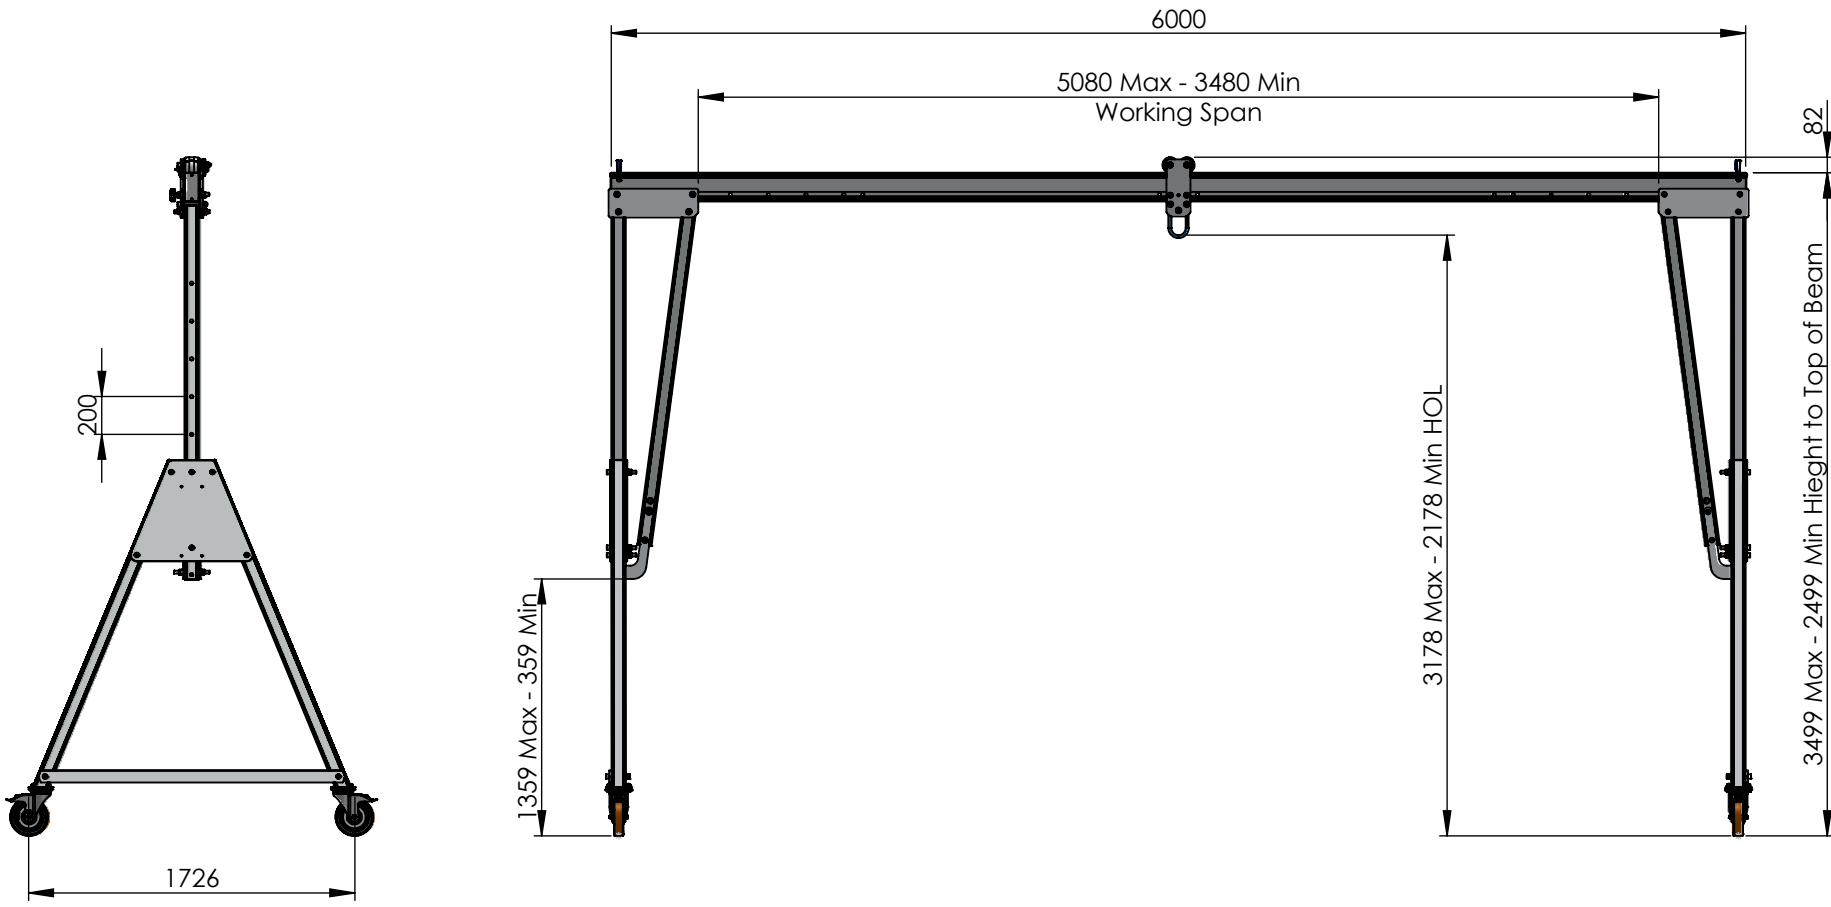

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	AB	09/06/2020	Galvanised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: General Arrangement of REID Lifting Porta-Gantry Size: Intermediate - WLL500kg 6000mm Beam		DWG NO. PGSS00500I-6000A		A4
Estimated Weight:	144kg	1:40	SHEET 1 OF 2	

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 25 - 35mm at centre of span
- Maximum castor surface pressure at full load - 12.72 Mpa
- Assembled gantry weight (excluding trollies) - 144kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference



Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	AB	09/06/2020
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID Lifting
Porta-Gantry Size: Intermediate -
WLL500kg 6000mm Beam**

DWG NO.


PGSS00500I-6000A

A4

Estimated Weight: 144kg

1:40

SHEET 2 OF 2

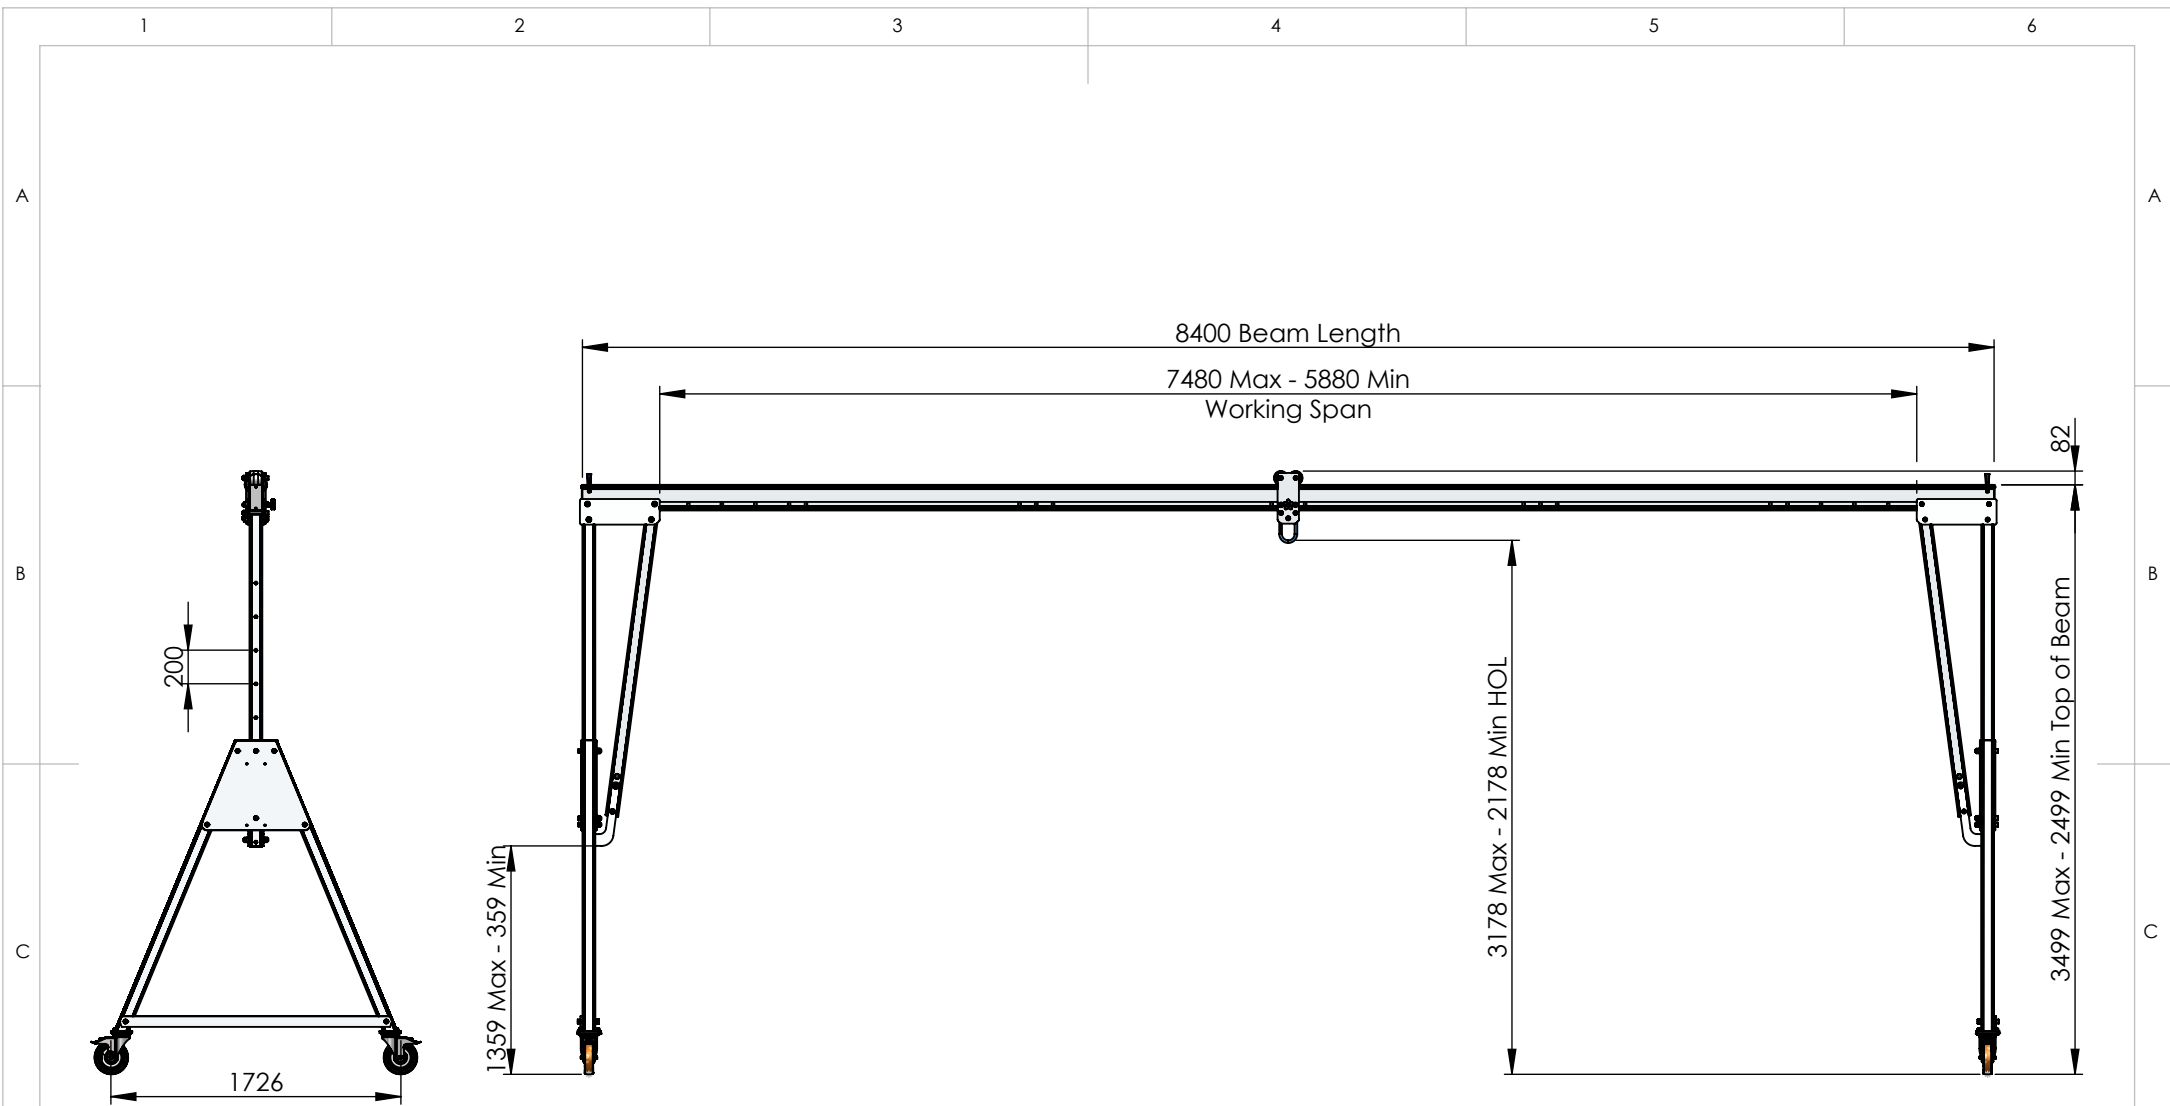

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	14/05/2021	None
APPV'D	CM	09/0	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of Reid Lifting PORTA-GANTRY Size Intermediate - 8400mm Beam**

DWG NO.

PGSS00500I-8400A

A4

Estimated Weight: 162kg

1:45

SHEET 1 OF 2

General Specification


- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 60 - 70mm at centre of span
- Maximum castor surface pressure at full load - 12.92 Mpa
- Assembled gantry weight (excluding trolleys) - 162kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

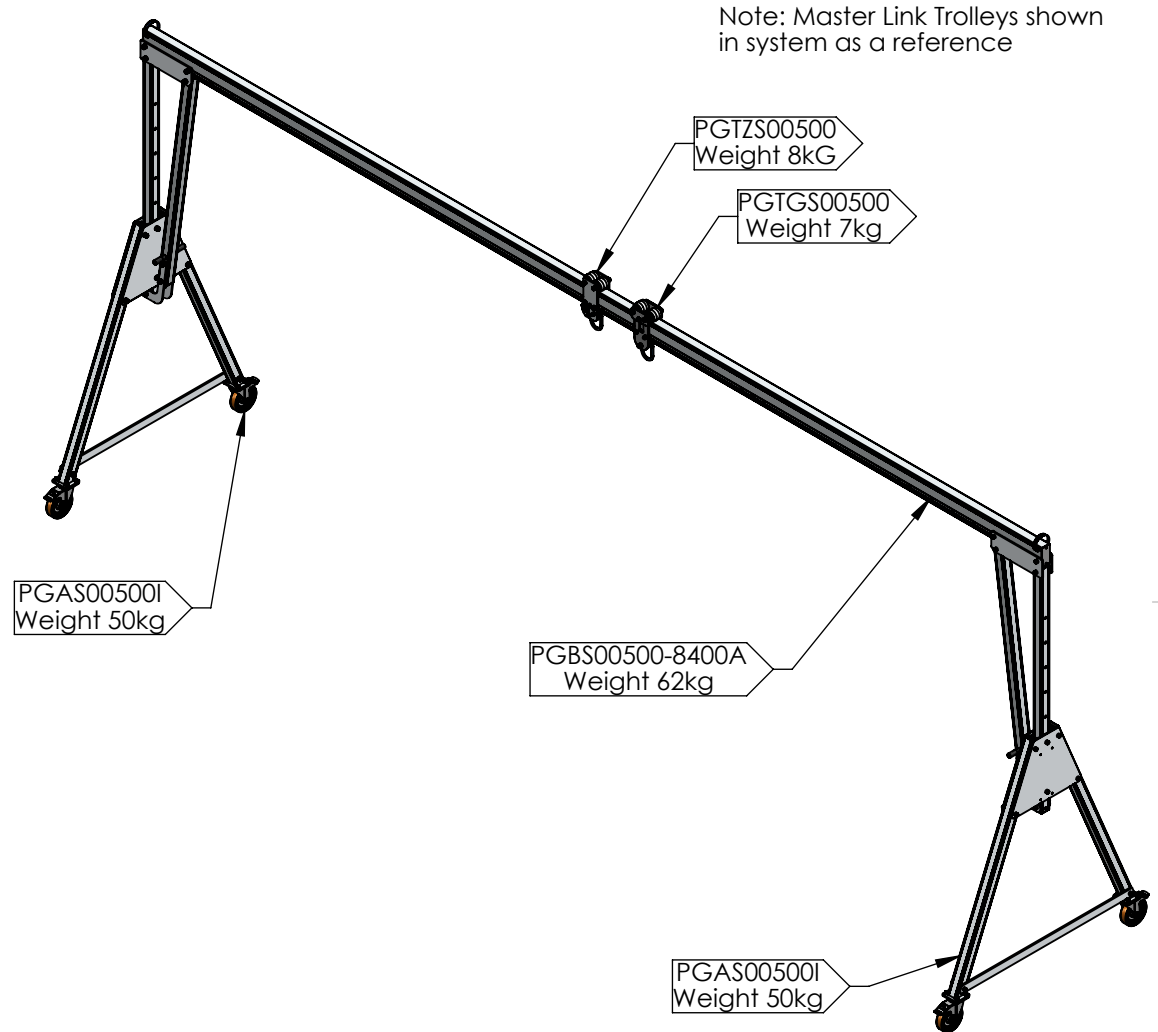

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	14/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of Reid Lifting PORTA-GANTRY Size Intermediate - 8400mm Beam**

DWG NO.


PGSS00500I-8400A

A4

Estimated Weight: 162kg

1:50

SHEET 2 OF 2

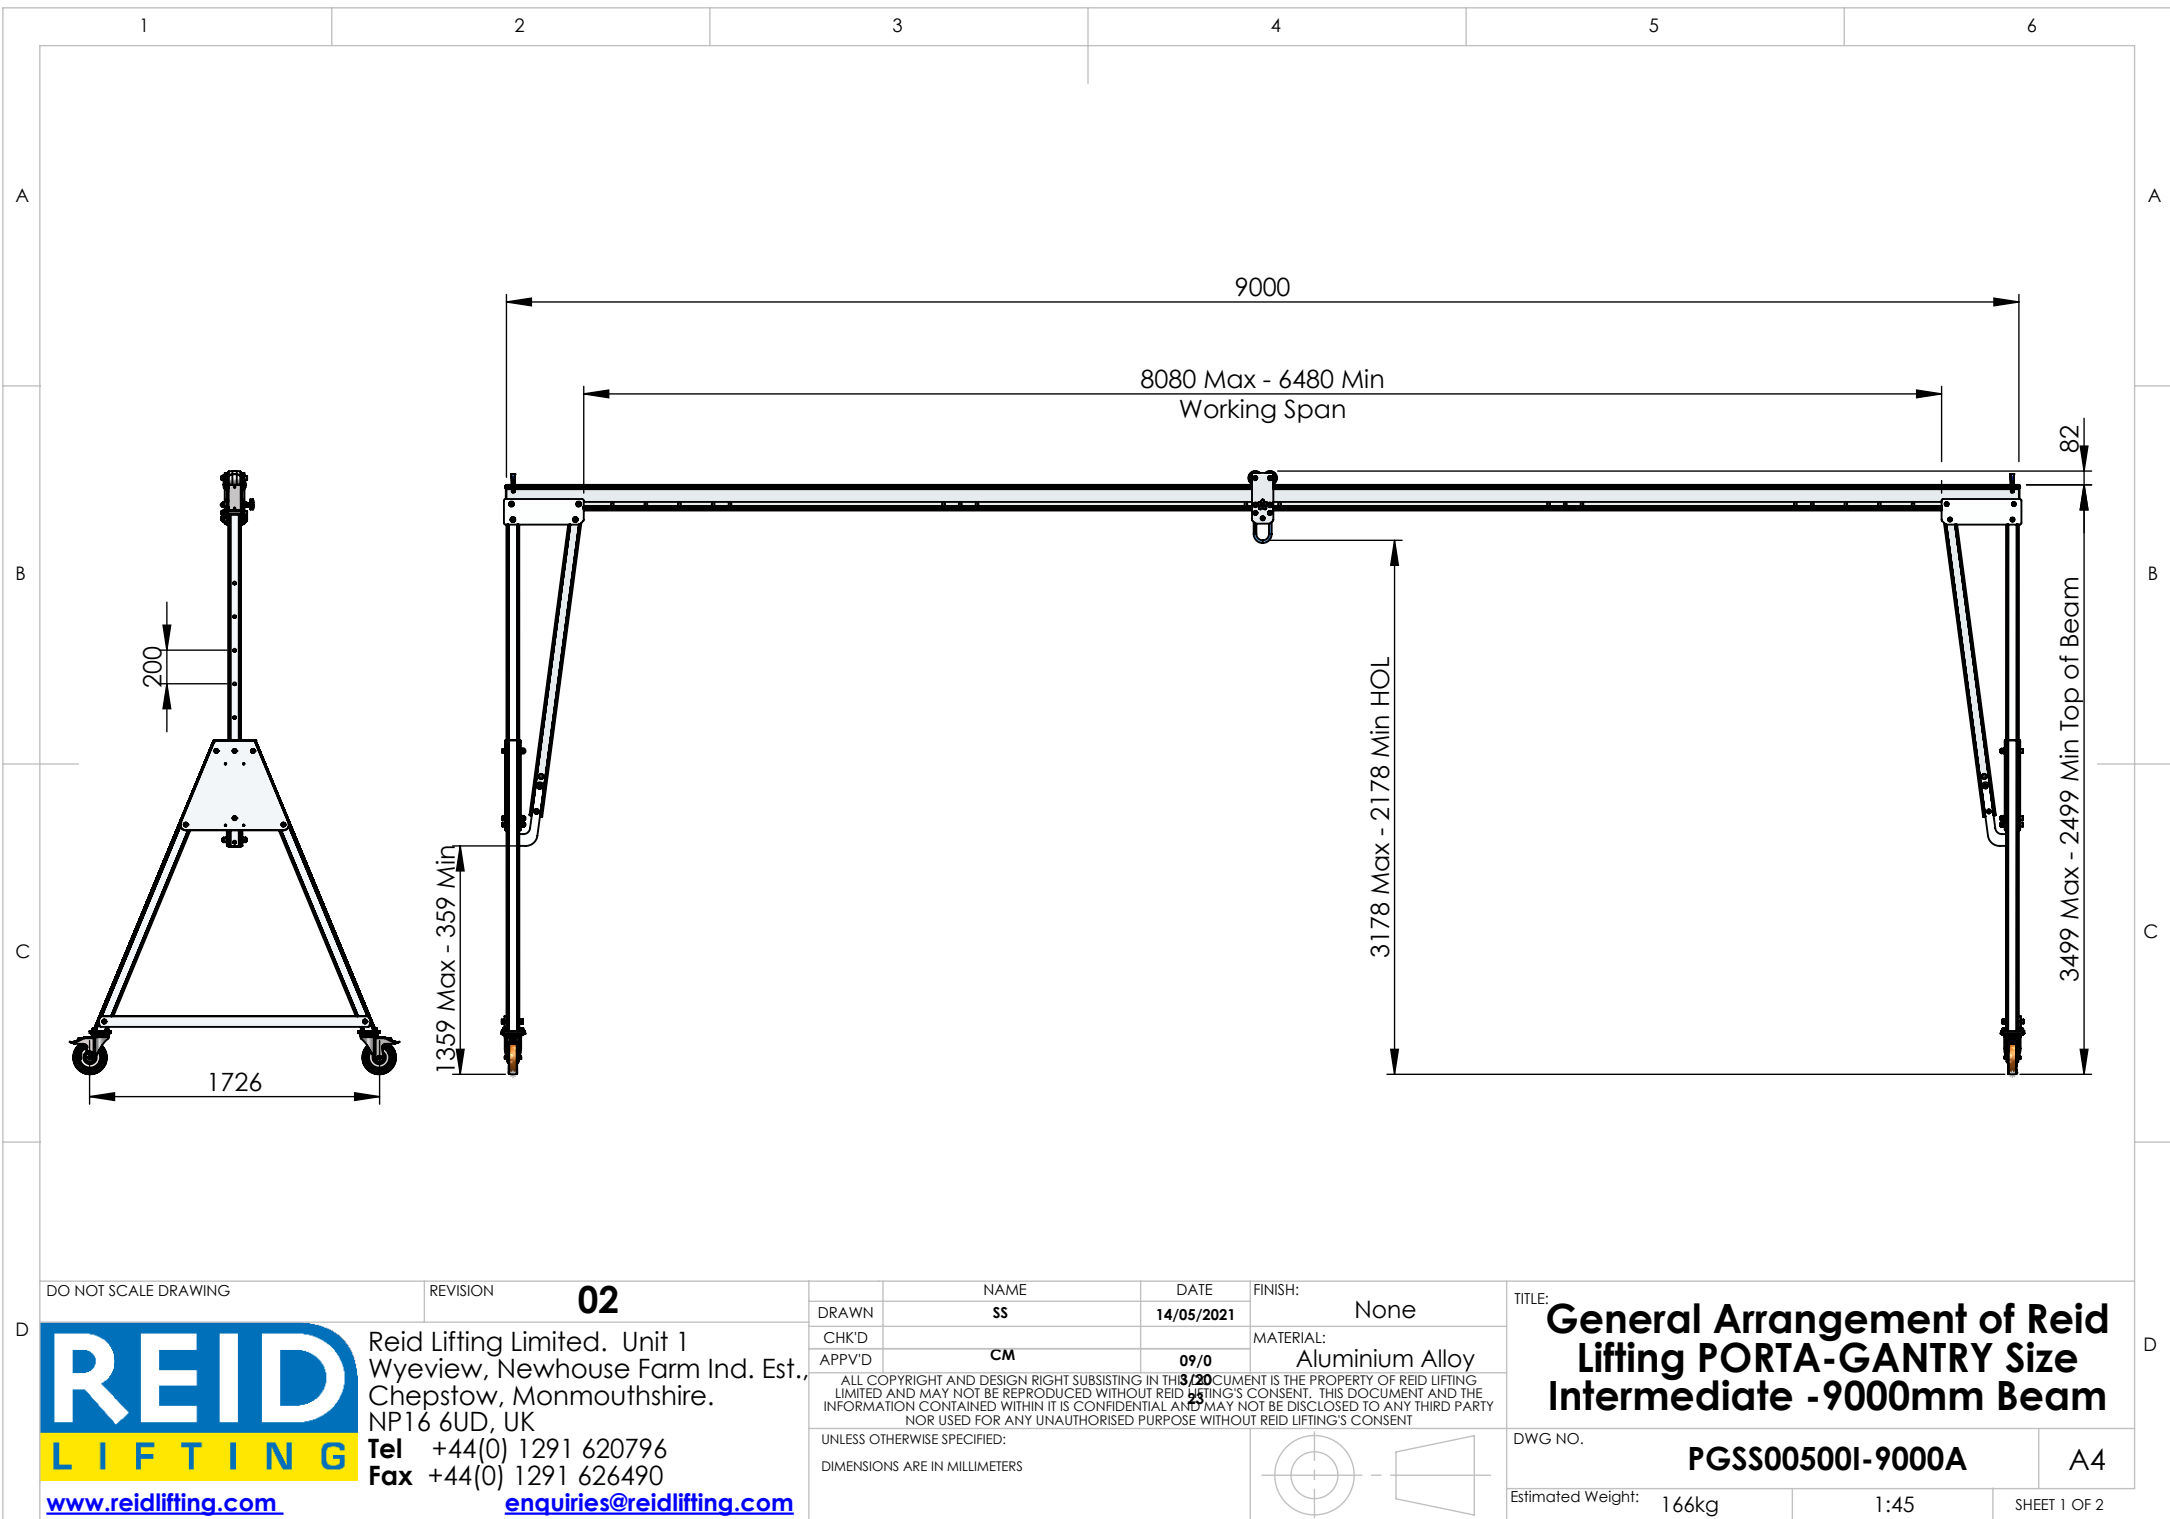

General Specification


- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 80 - 90mm at centre of span
- Maximum castor surface pressure at full load - 12.96 Mpa
- Assembled gantry weight (excluding trolleys) - 166kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under the PPE regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

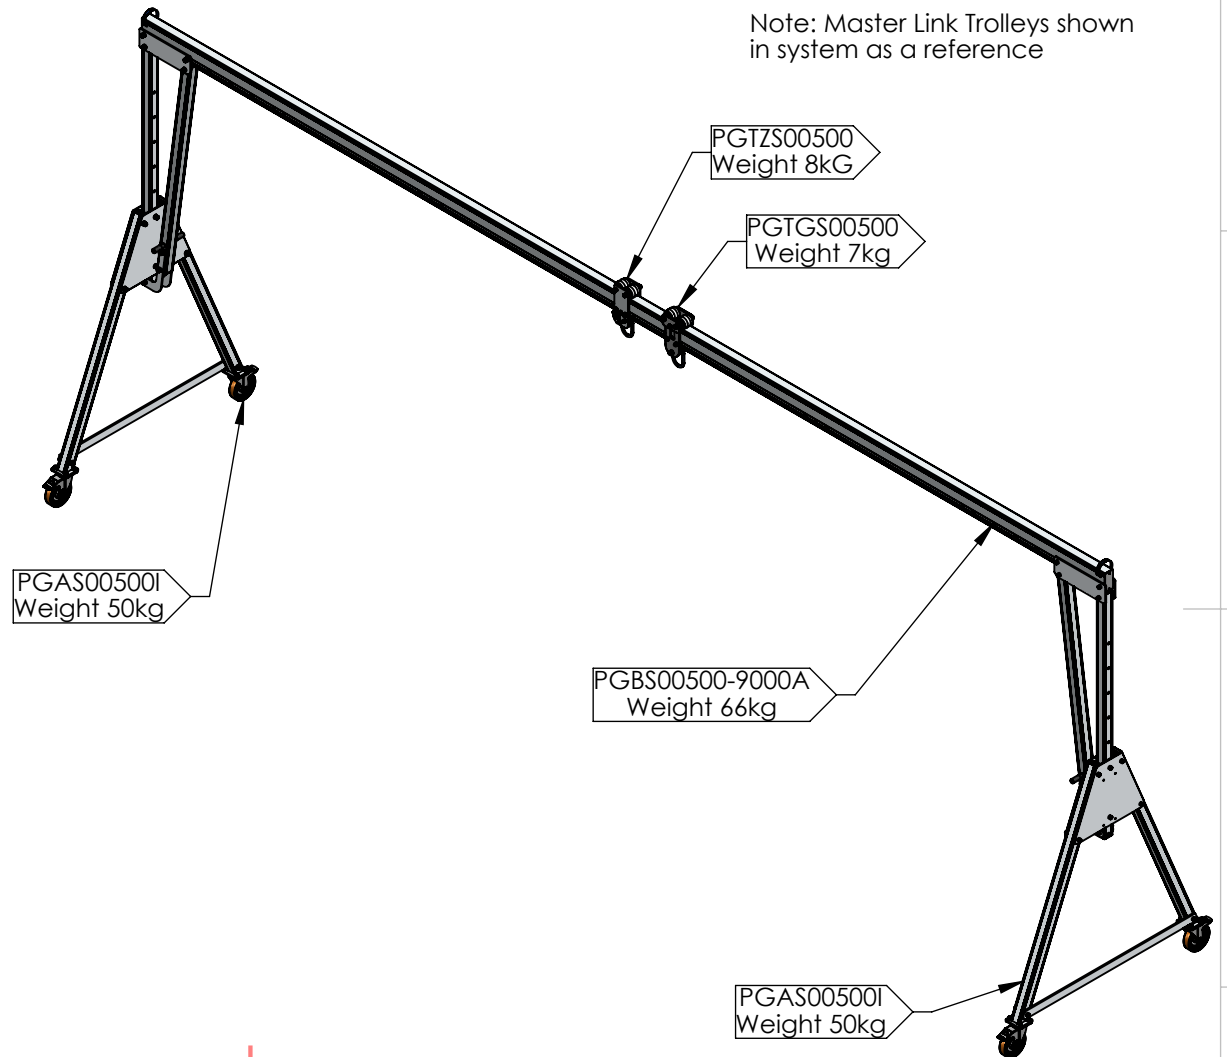

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	14/05/2021
CHK'D		
APP'V'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of Reid Lifting PORTA-GANTRY Size Intermediate -9000mm Beam**

DWG NO.

PGSS00500I-9000A

A4



Estimated Weight: 166kg

1:50

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal or greater than the distance between castors on the A-frame

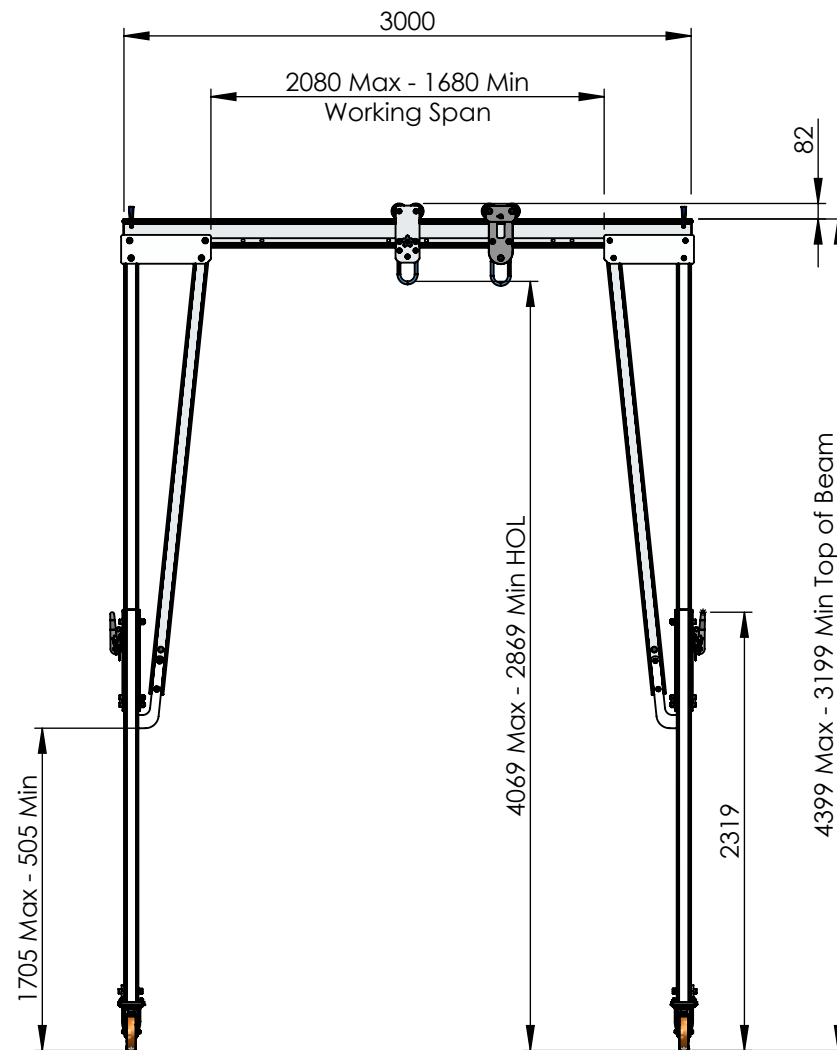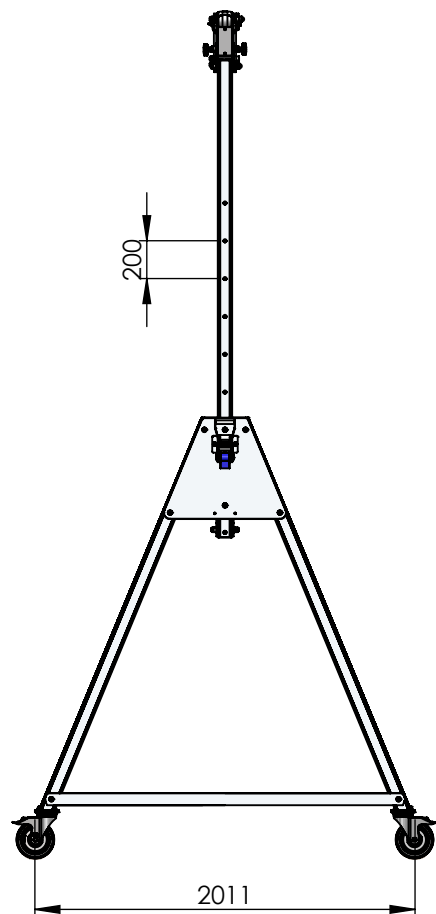

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	BJ	08/02/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of
REID Lifting Porta-Gantry Size
Tall 3000mm Beam WLL500kg**

DWG NO.

PGSS00500T-3000A

A4

Estimated Weight: 134kg

1:40

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 0-5 mm at centre of span
- Maximum castor surface pressure at full load - 12.62 MPa
- Assembled gantry weight (excluding trolleys) - 134kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

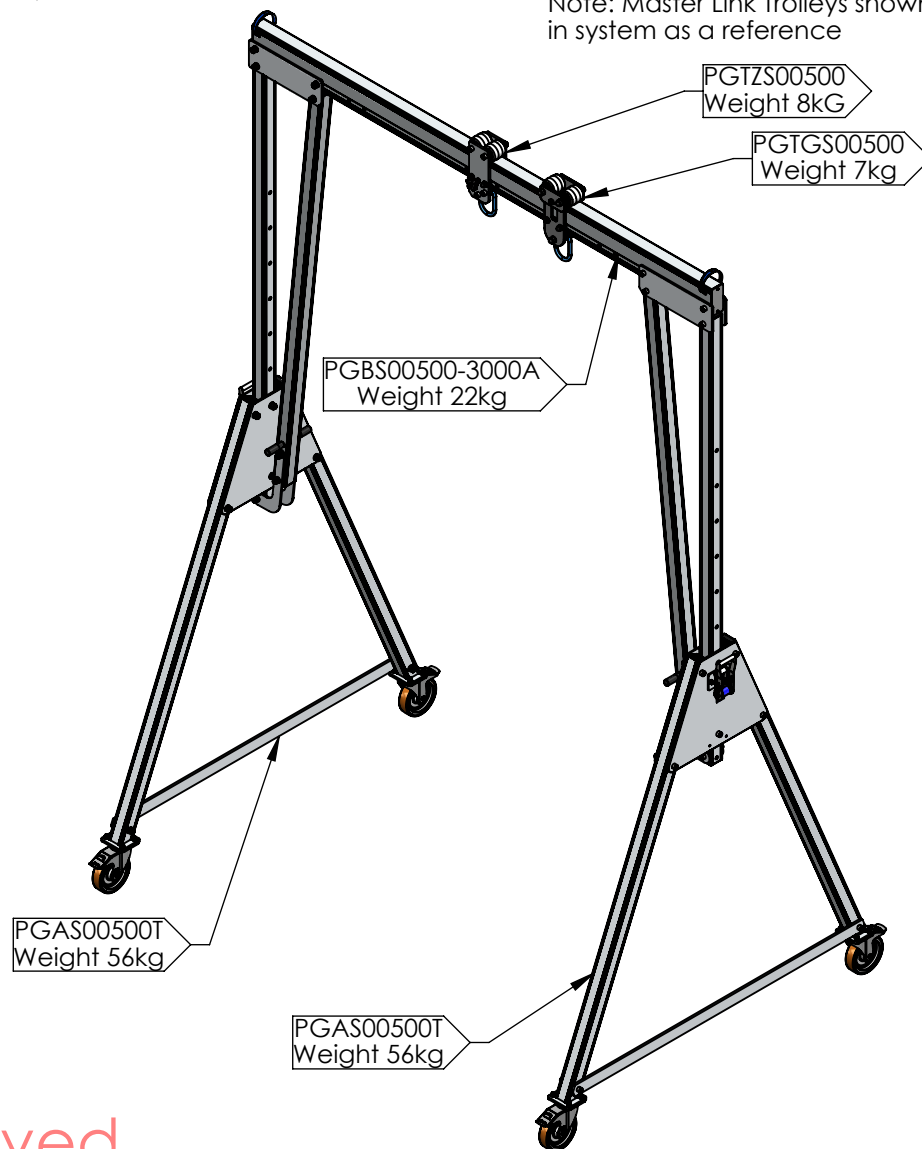

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	08/02/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Tall 3000mm Beam WLL500kg**

DWG NO.



PGSS00500T-3000A

A4

Estimated Weight: 134kg

1:35

SHEET 2 OF 2

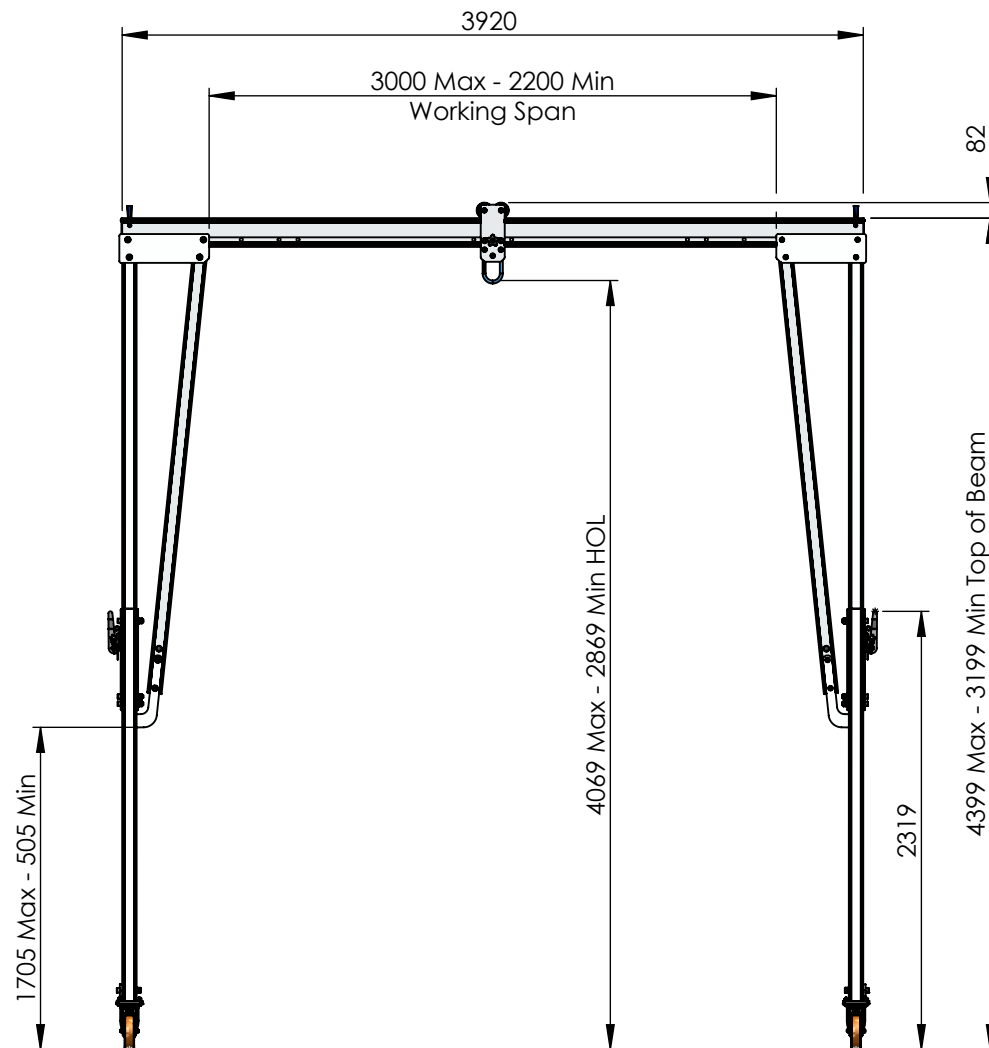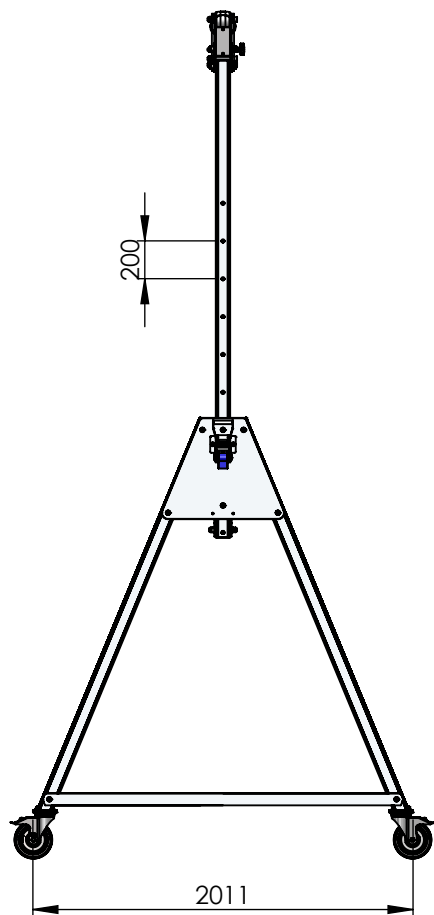

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	20/05/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL:
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			Aluminium Alloy
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of
REID Lifting Porta-Gantry Size
Tall 3920mm Beam WLL500kg**

DWG NO.

PGSS00500T-3920A

A4

Estimated Weight: 141kg

1:40

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 5 - 10mm at centre of span
- Maximum castor surface pressure at full load - 12.69 Mpa
- Assembled gantry weight (excluding trollies) - 141kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

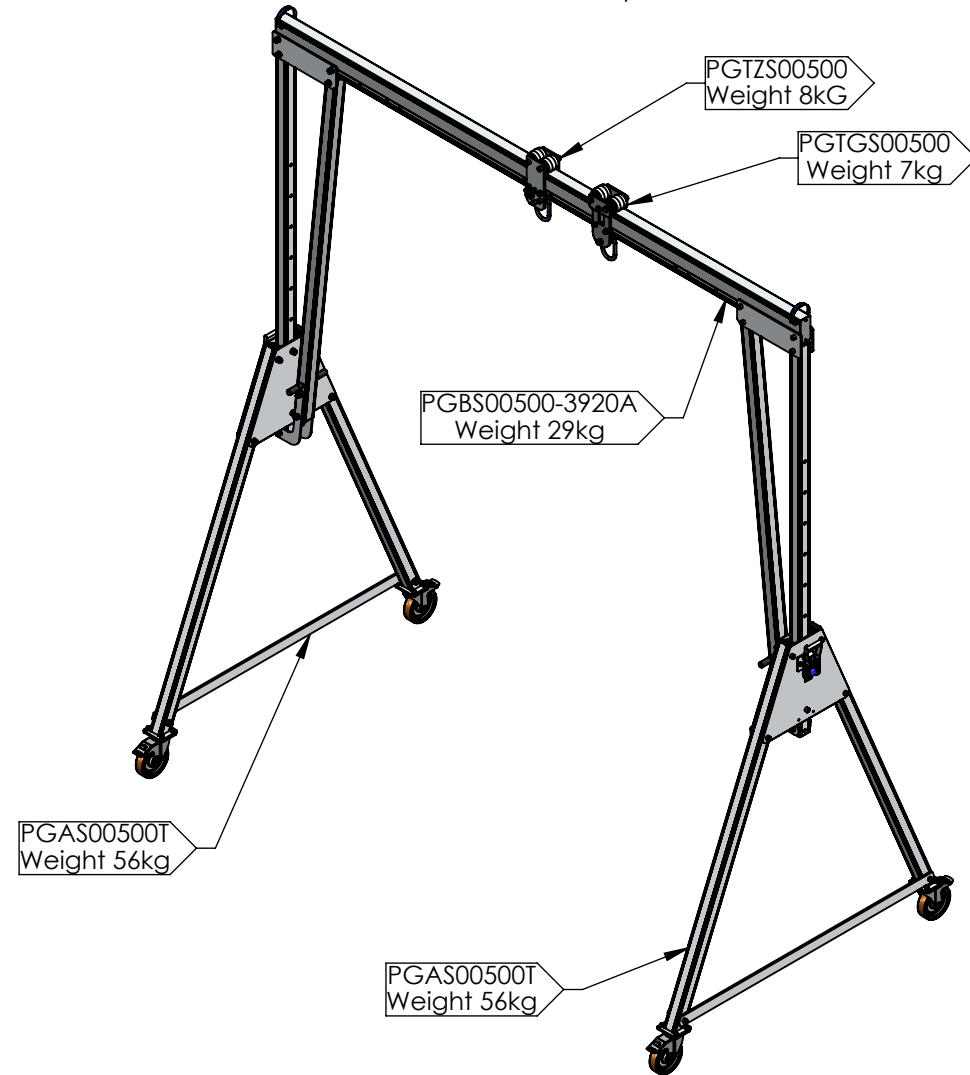

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	20/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Tall 3920mm Beam WLL500kg**

DWG NO.



PGSS00500T-3920A

A4

Estimated Weight: 141kg

1:45

SHEET 2 OF 2

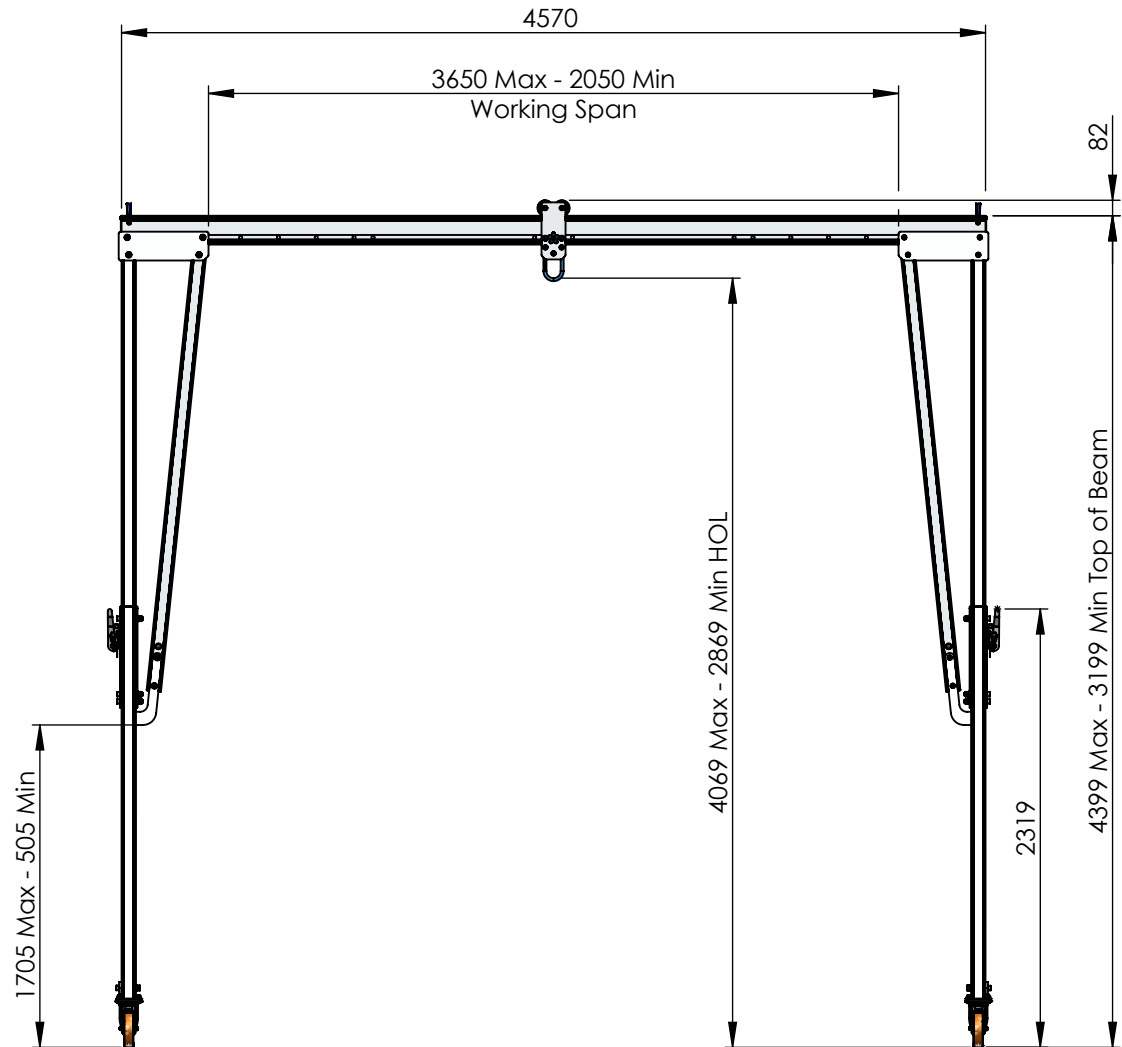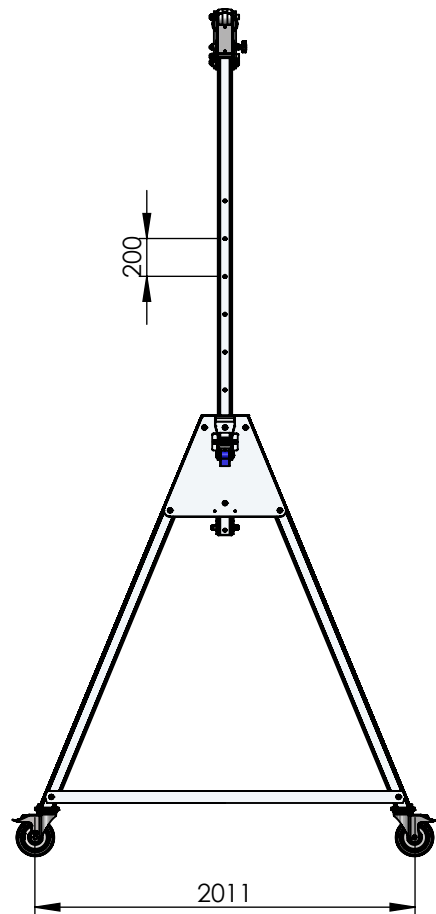

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	25/05/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL:
Aluminium Alloy			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of
REID Lifting Porta-Gantry Size
Tall 4570mm Beam WLL500kg**

DWG NO.

PGSS00500T-4570A

A4

Estimated Weight: 145kg

1:40

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 10 - 15mm at centre of span
- Maximum castor surface pressure at full load - 12.74 Mpa
- Assembled gantry weight (excluding trollies) - 145kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trollies shown in system as a reference

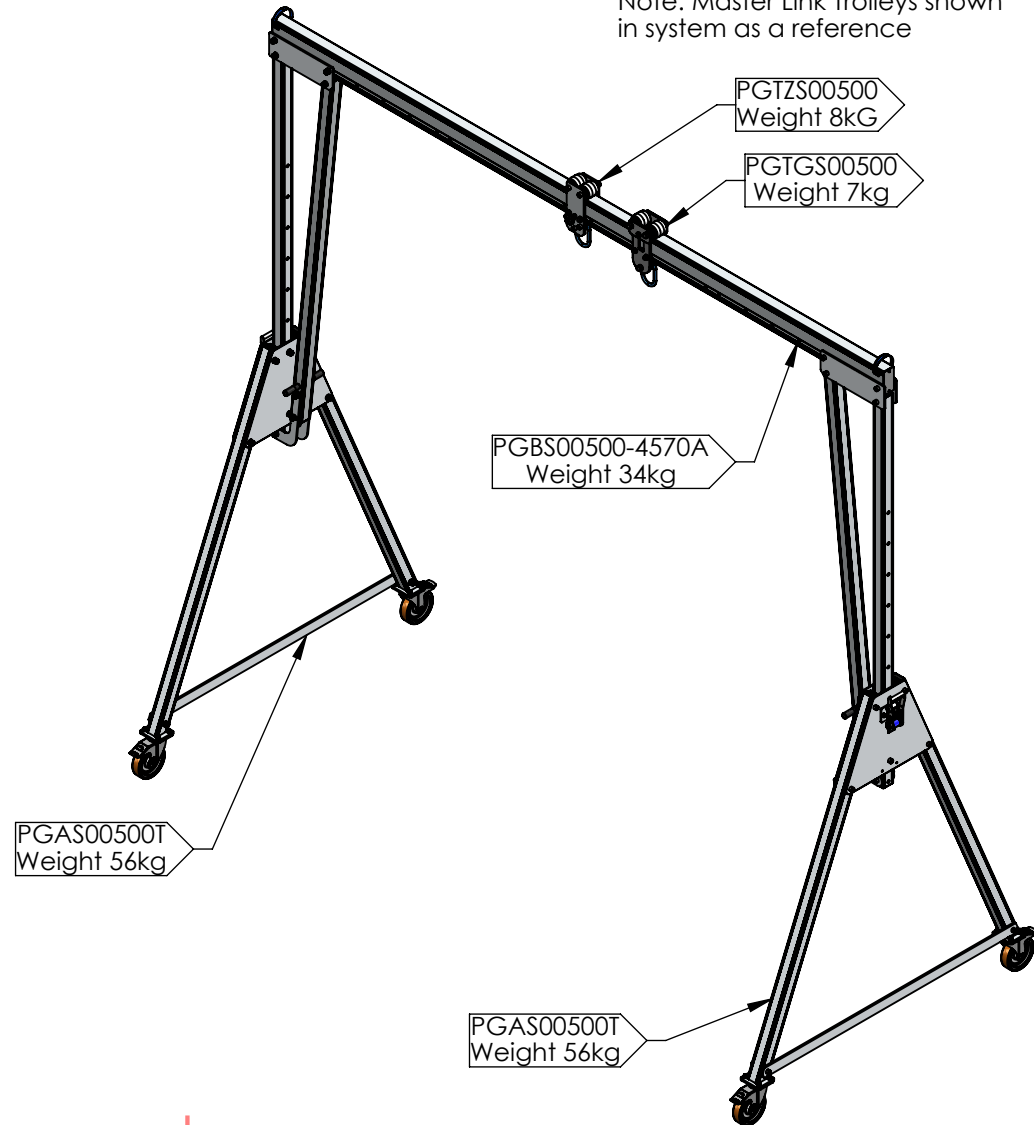

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Tall 4570mm Beam WLL500kg**

DWG NO.


PGSS00500T-4570A

A4

Estimated Weight: 145kg

1:45

SHEET 2 OF 2

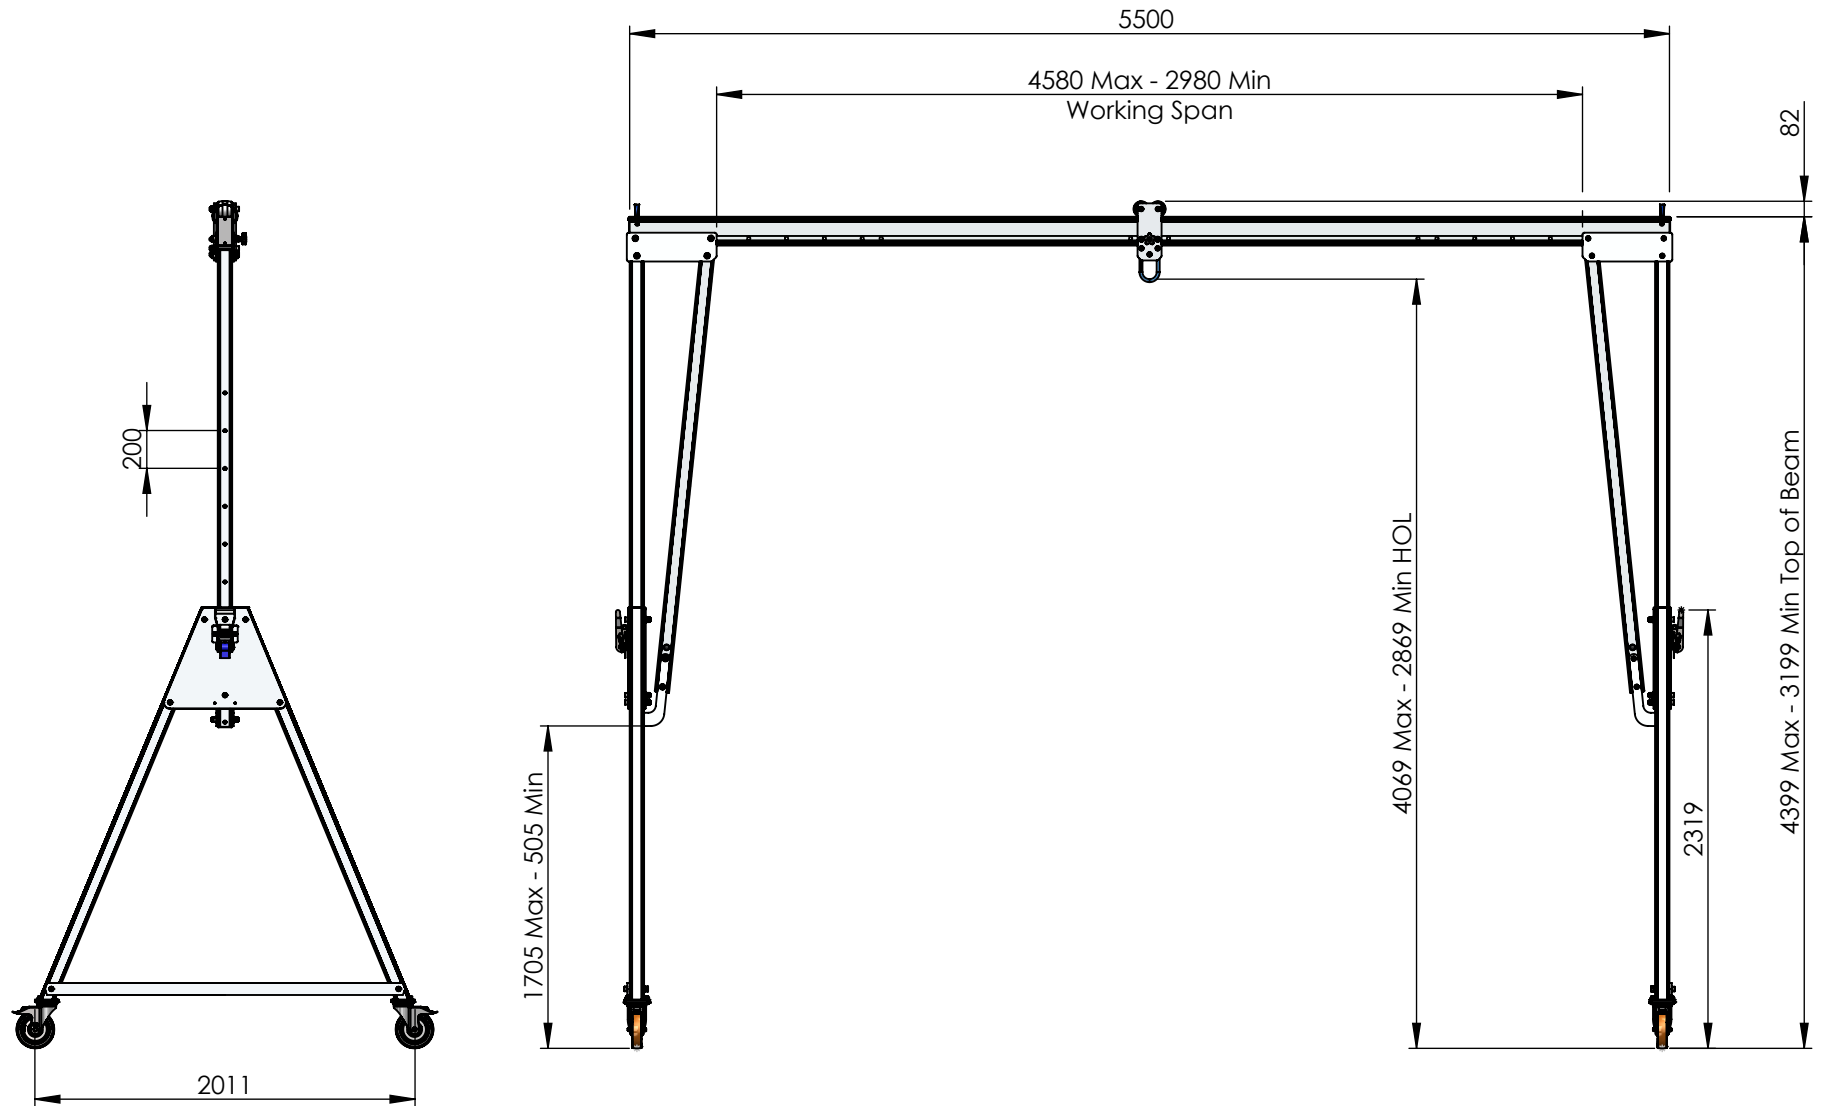

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	25/05/2021	Anodised
APP'V'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of
REID Lifting Porta-Gantry Size
Tall 5500mm Beam WLL500kg**

DWG NO.

PGSS00500T-5500A

A4

Estimated Weight: 152kg

1:40

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 20 - 30mm at centre of span
- Maximum castor surface pressure at full load - 12.82 Mpa
- Assembled gantry weight (excluding trollies) - 152kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Approved

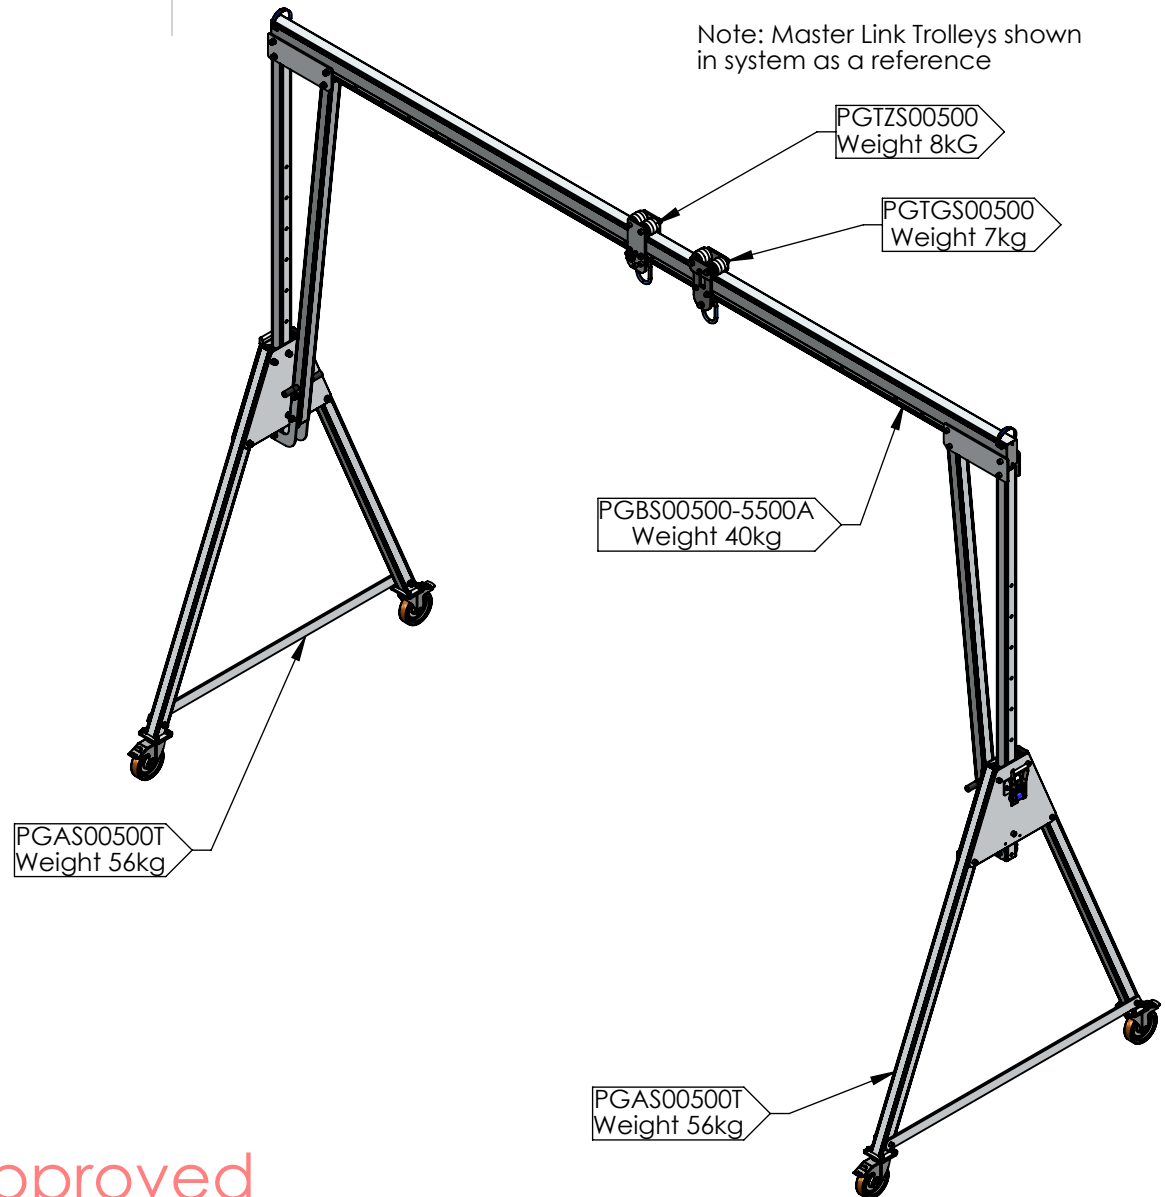

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	25/05/2021
CHK'D		
APP'V'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size Tall 5500mm Beam WLL500kg**

DWG NO.


PGSS00500T-5500A

A4

Estimated Weight: 152kg

1:45

SHEET 2 OF 2

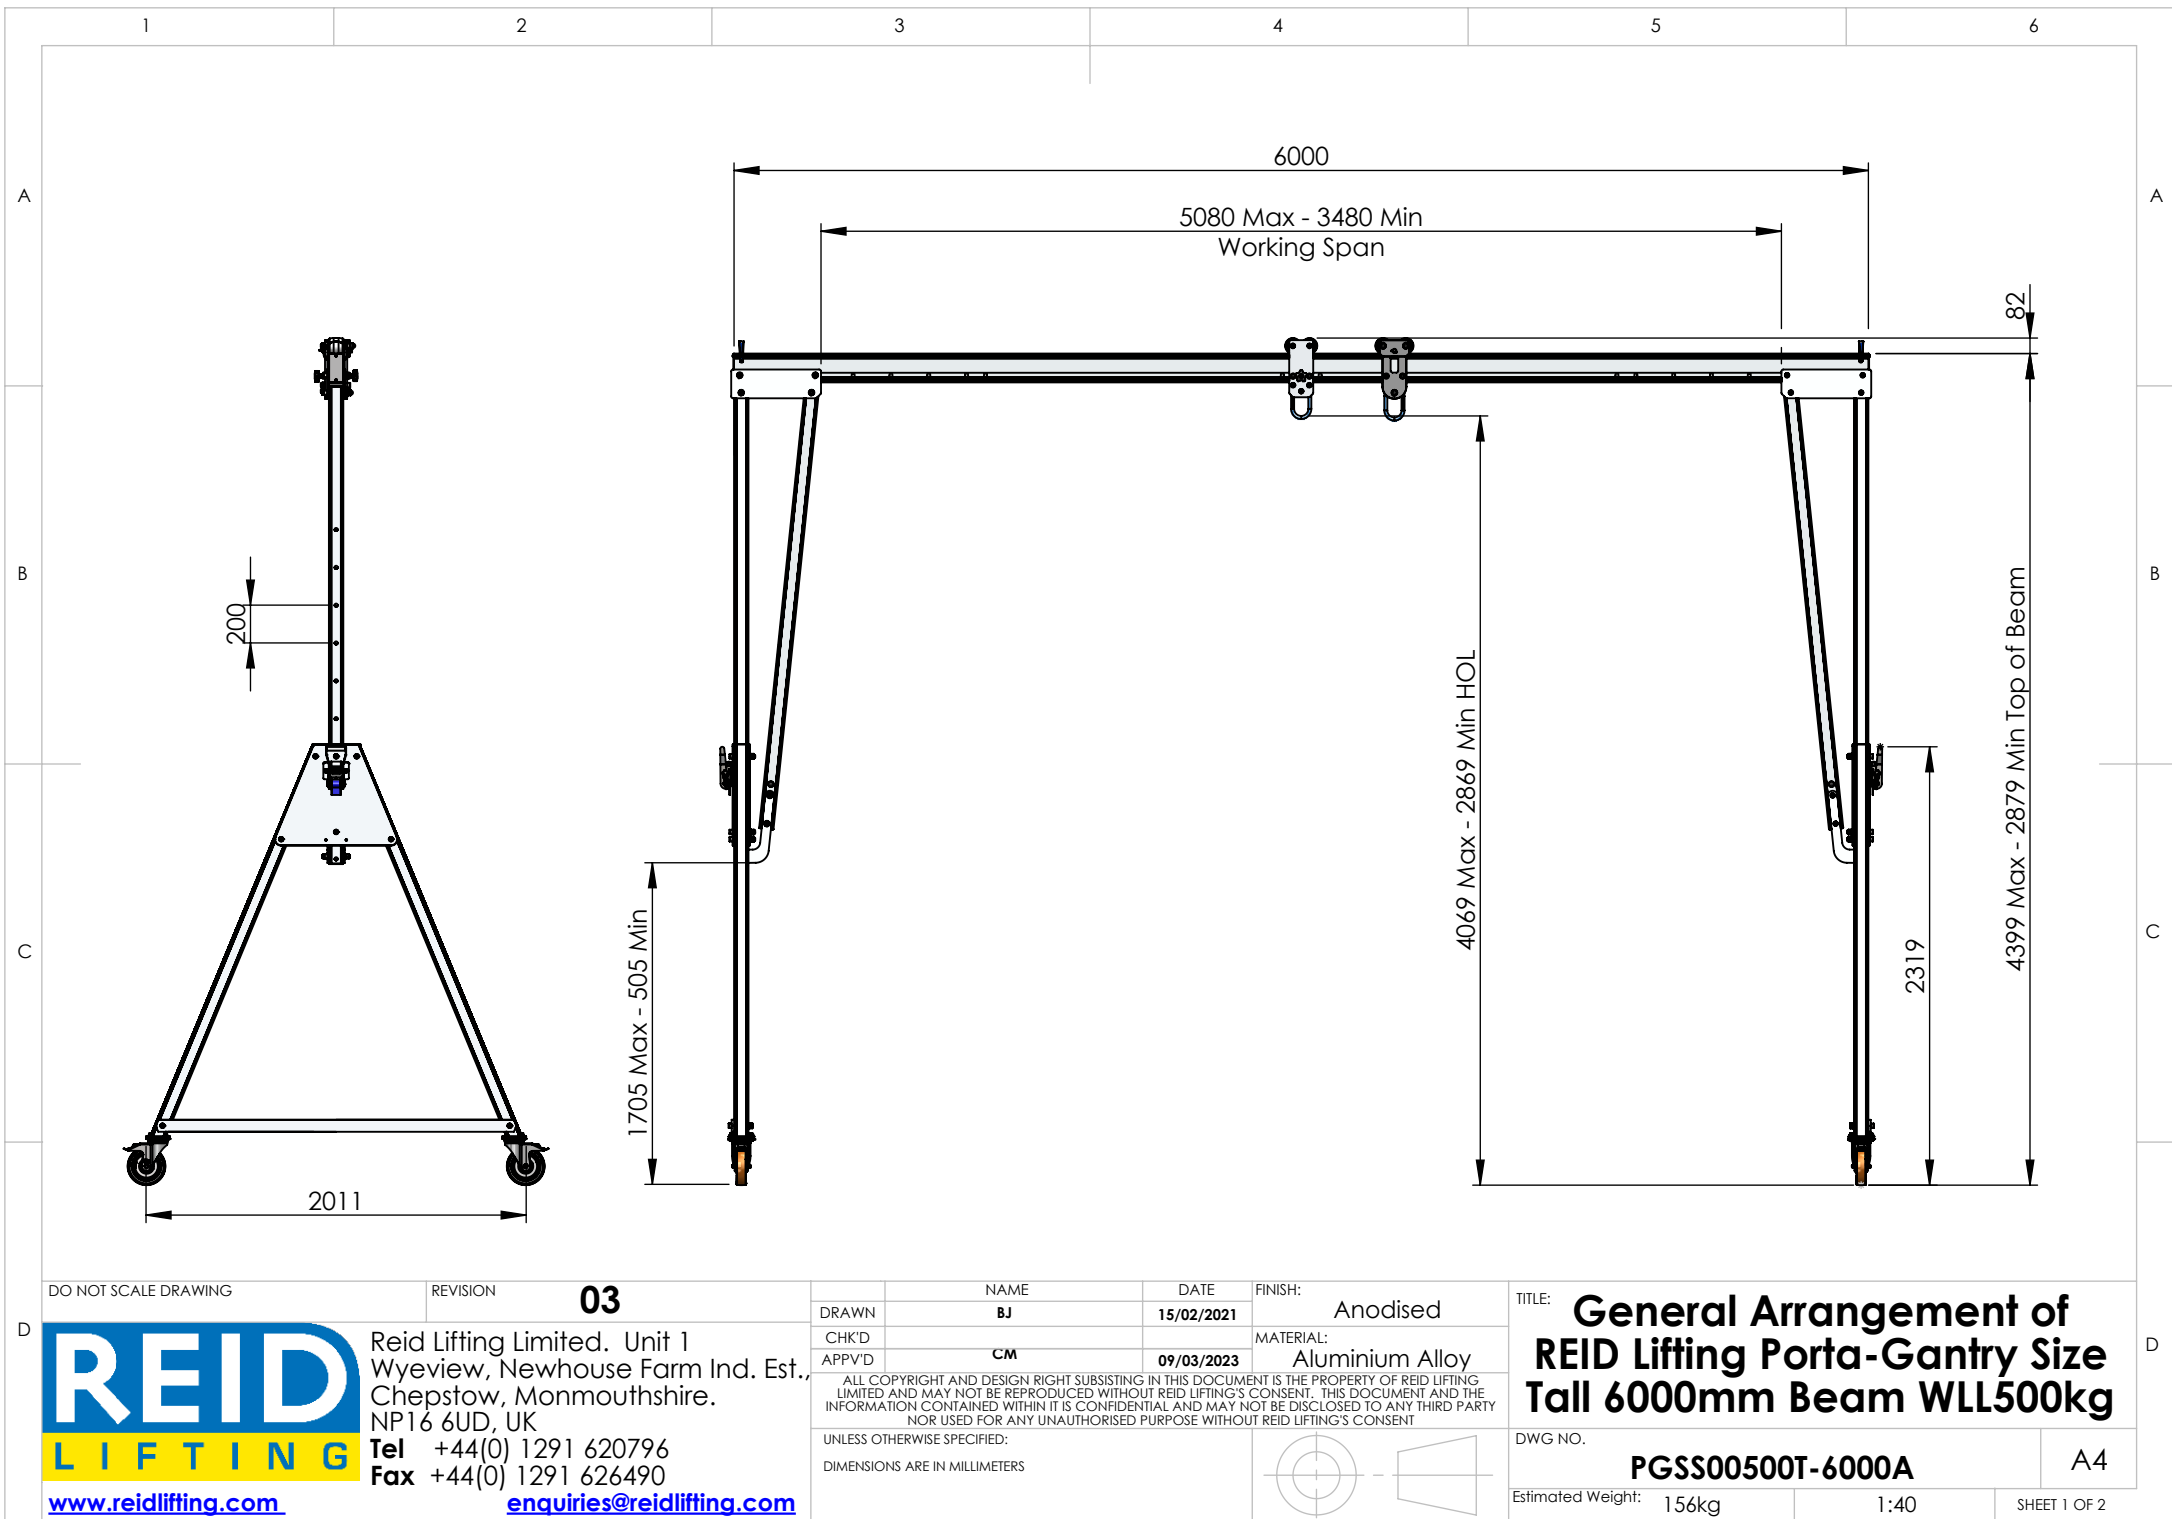

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 25-35 mm at centre of span
- Maximum castor surface pressure at full load - 12.86 MPa
- Assembled gantry weight (excluding trolleys) - 156kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

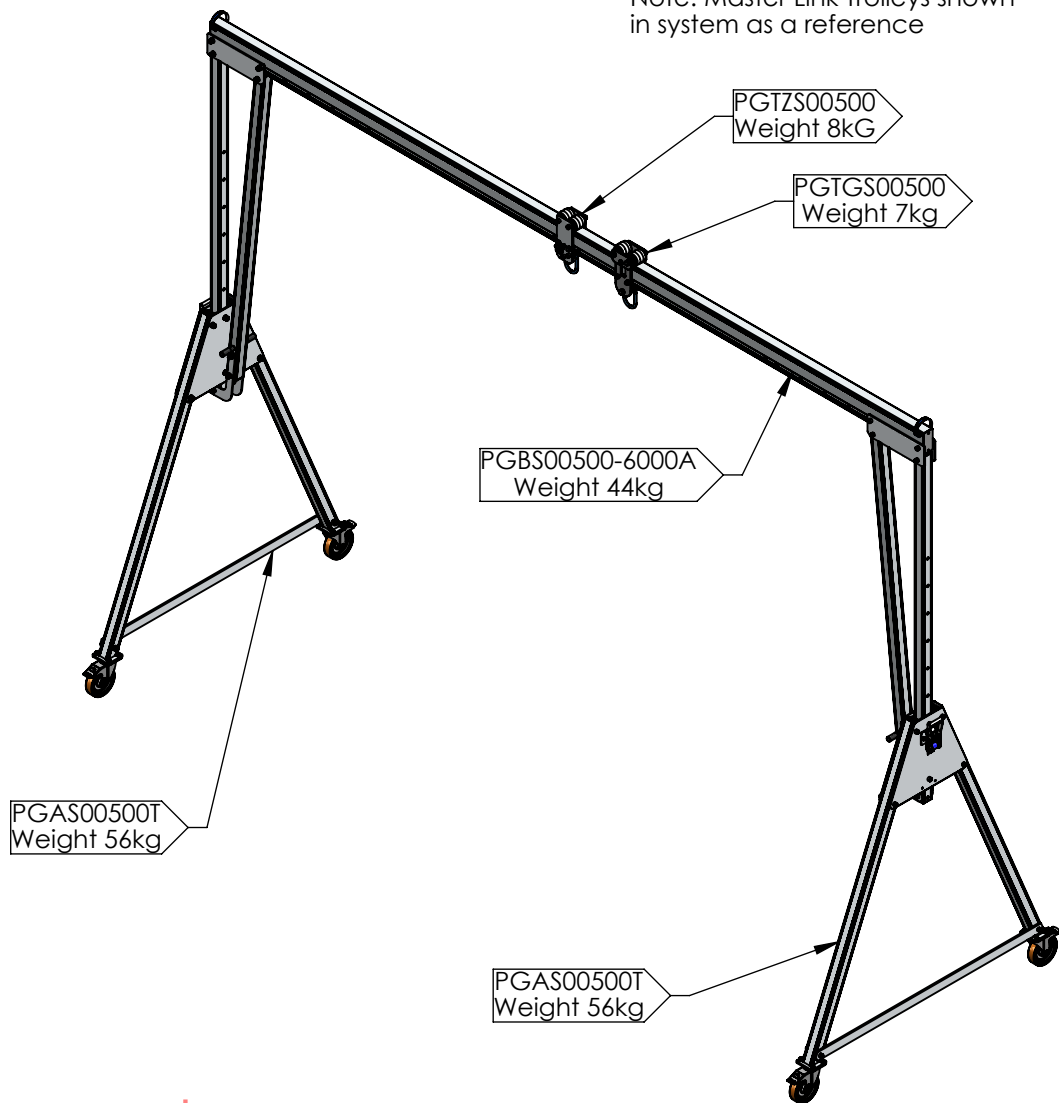

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	15/02/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size Tall
6000mm Beam WLL500kg**

DWG NO.


PGSS00500T-6000A

A4

Estimated Weight: 156kg

1:45

SHEET 2 OF 2

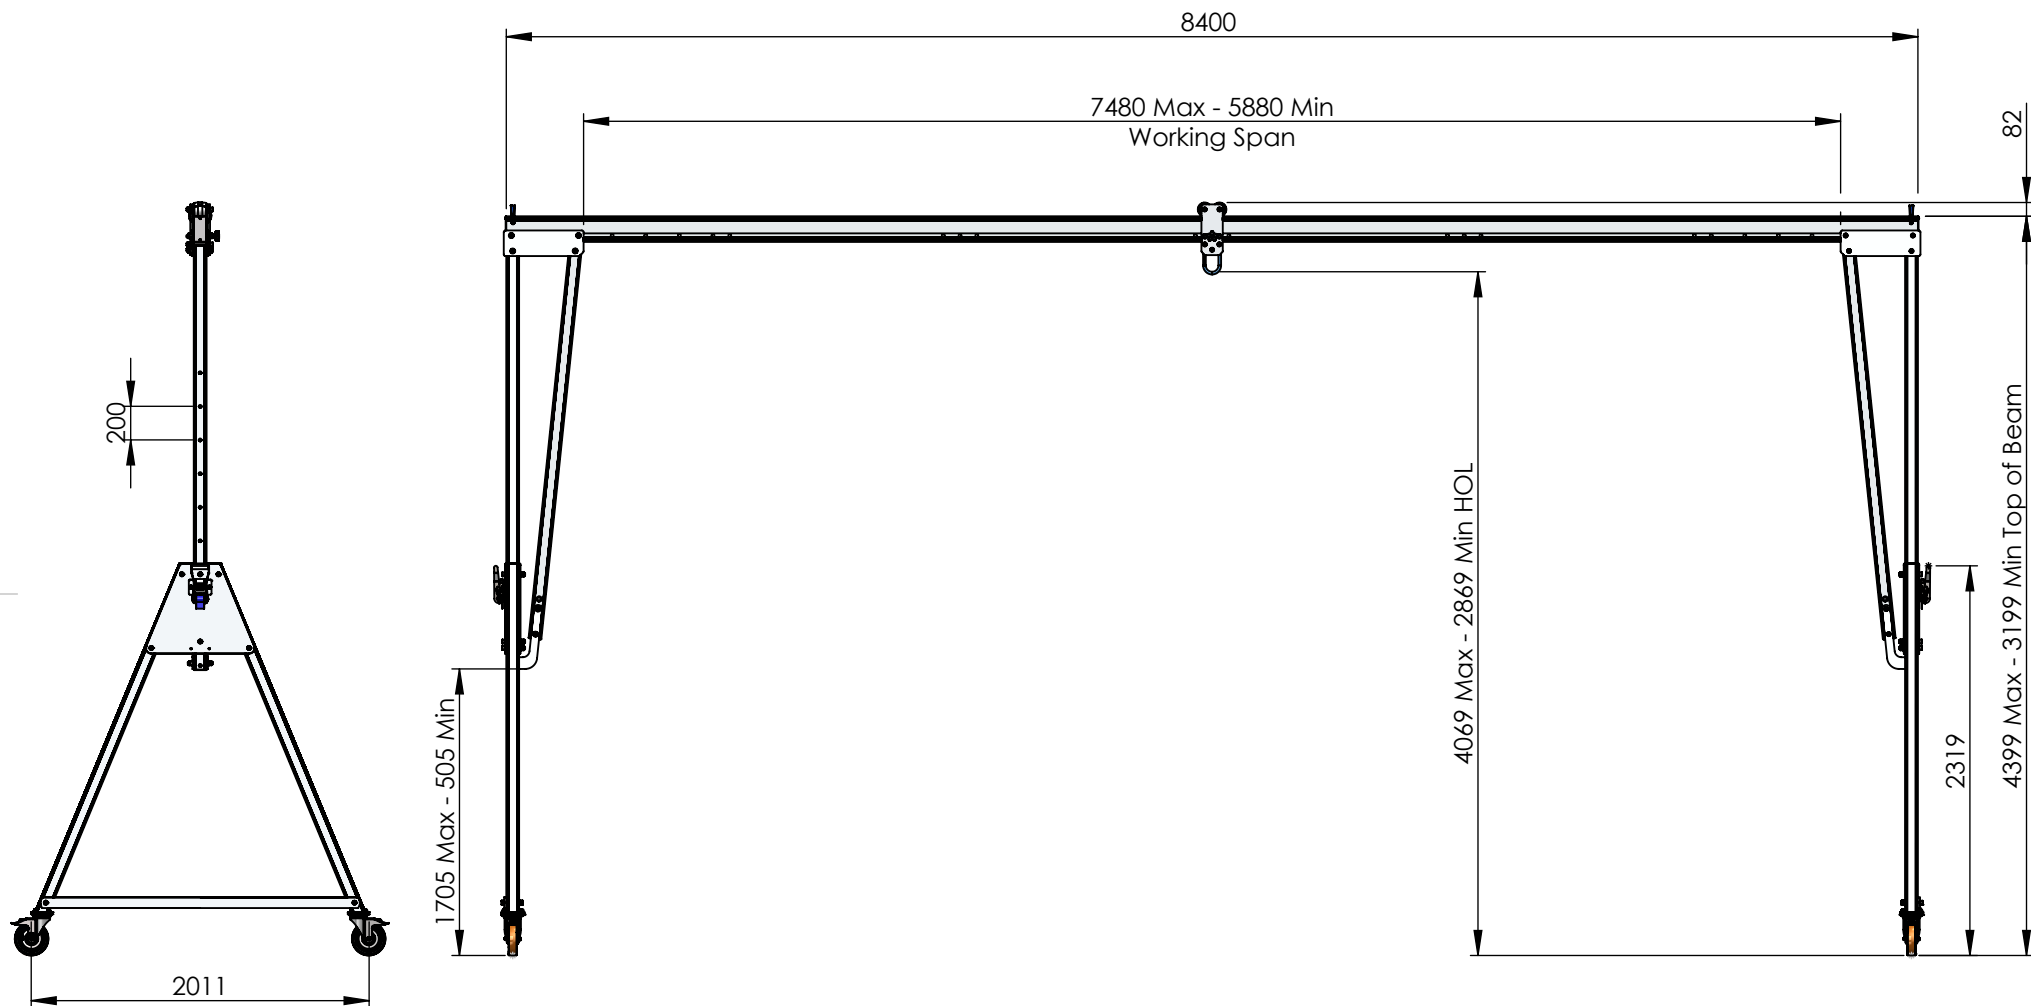

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	25/05/2021	Anodised
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of
REID Lifting Porta-Gantry Size
Tall 8400mm Beam WLL500kg**

DWG NO.

PGSS00500T-8400A

A4

Estimated Weight: 173kg

1:45

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 60 - 70mm at centre of span
- Maximum castor surface pressure at full load - 13.05 Mpa
- Assembled gantry weight (excluding trollies) - 173kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Approved

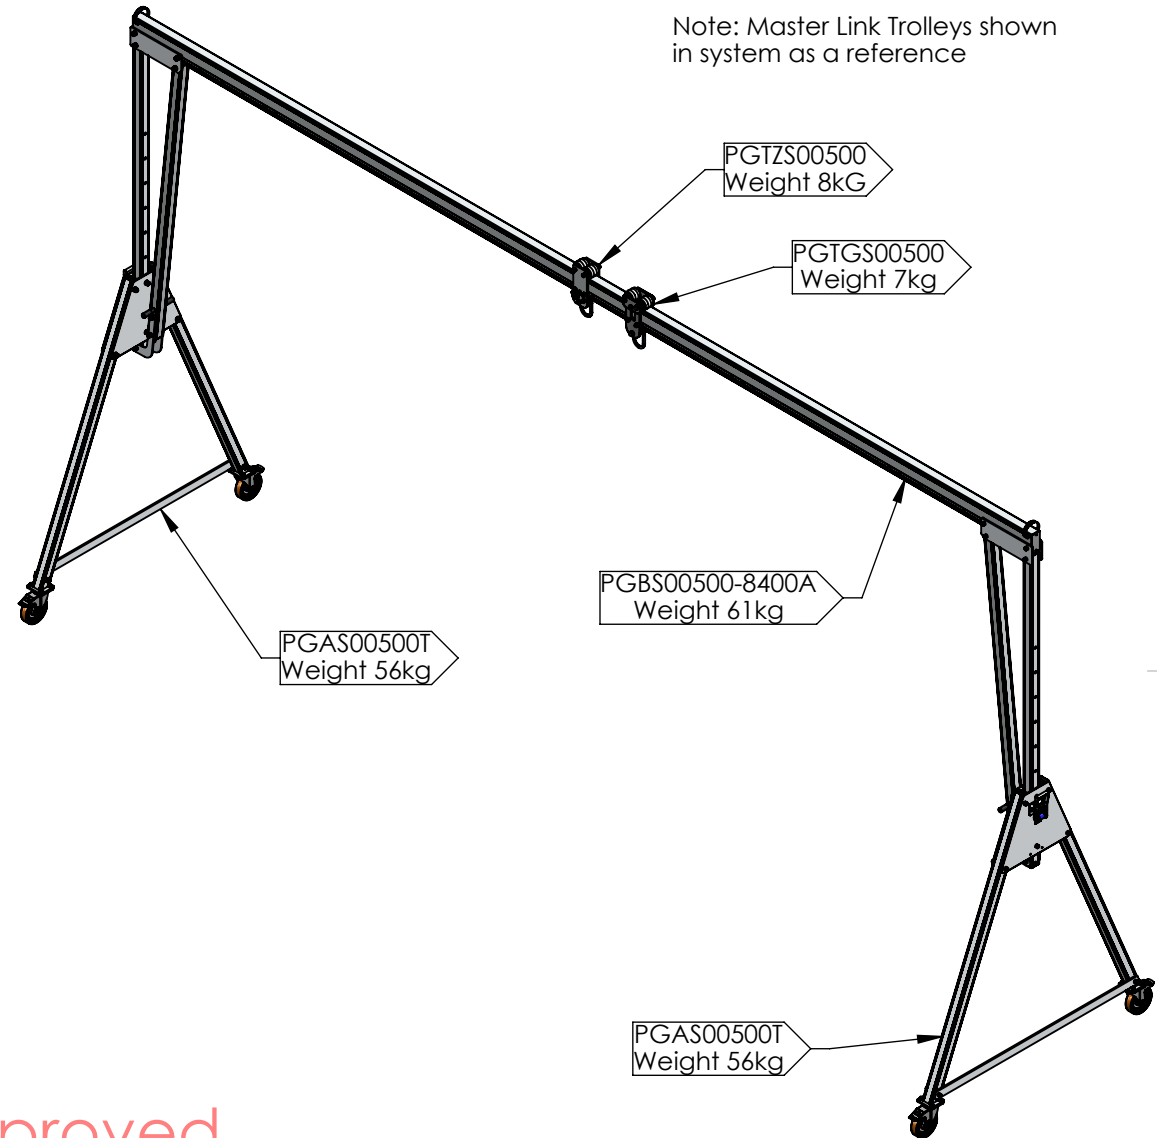

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	25/05/2021
CHK'D		
APP'V'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS
THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE
REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT
AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND
MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY
UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size Tall
8400mm Beam WLL500kg**

DWG NO.

PGSS00500T-8400A

A4

Estimated Weight: 173kg

1:50

SHEET 2 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 80 - 90mm at centre of span
- Maximum castor surface pressure at full load - 13.10 Mpa
- Assembled gantry weight (excluding trollies) - 178kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodized.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Approved

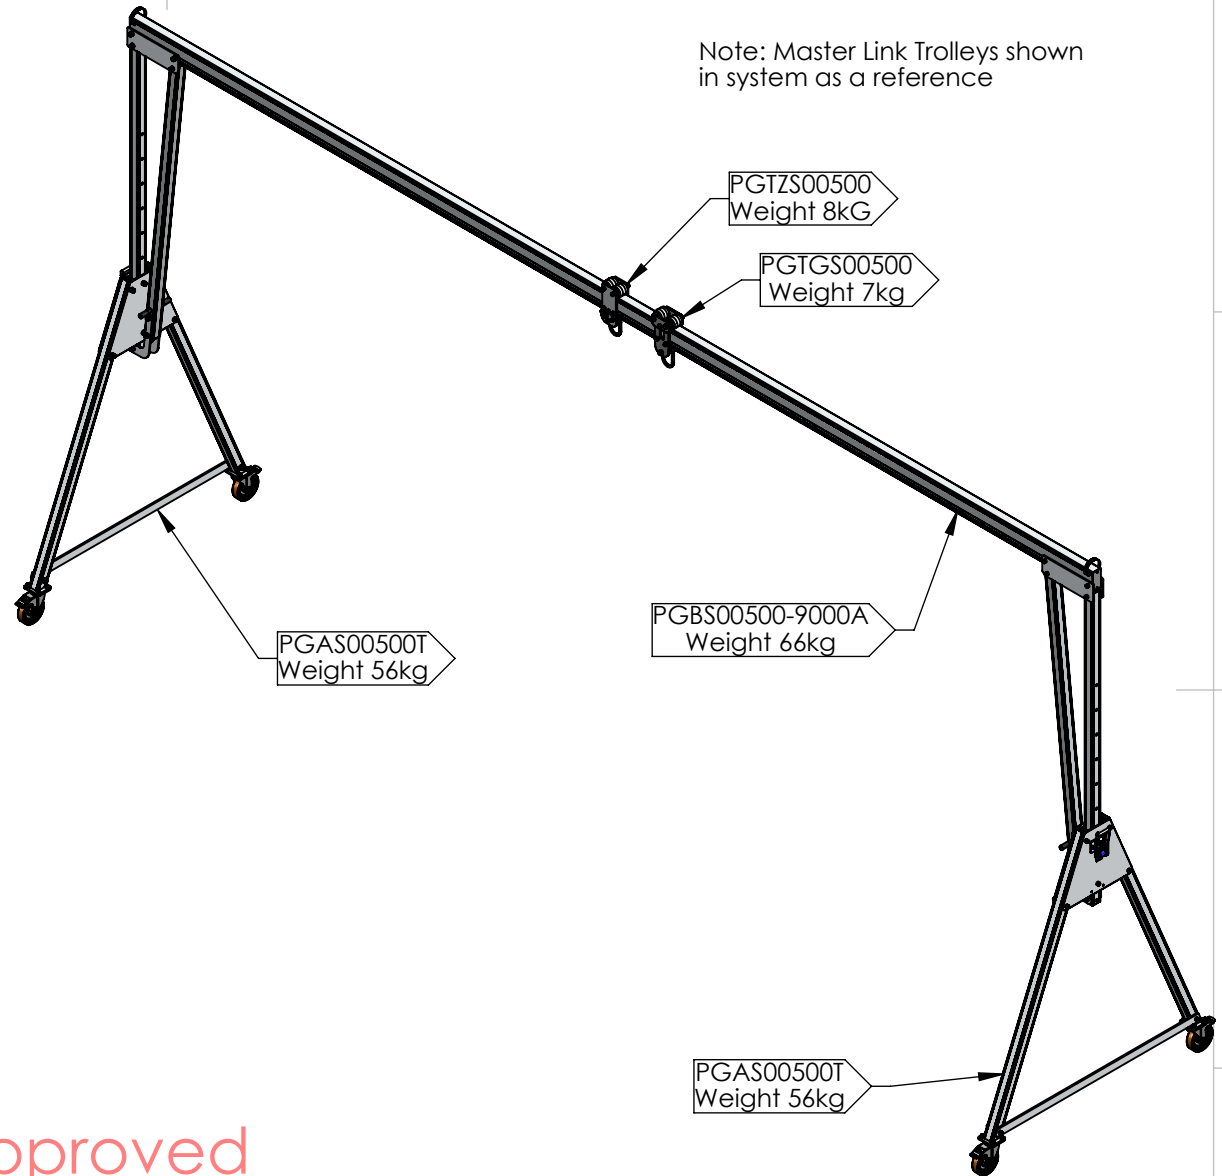

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	25/05/2021
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size Tall
9000mm Beam WLL 500kg**

DWG NO.

PGSS00500T-9000A

A4


Estimated Weight: 178kg

1:50

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-Frame

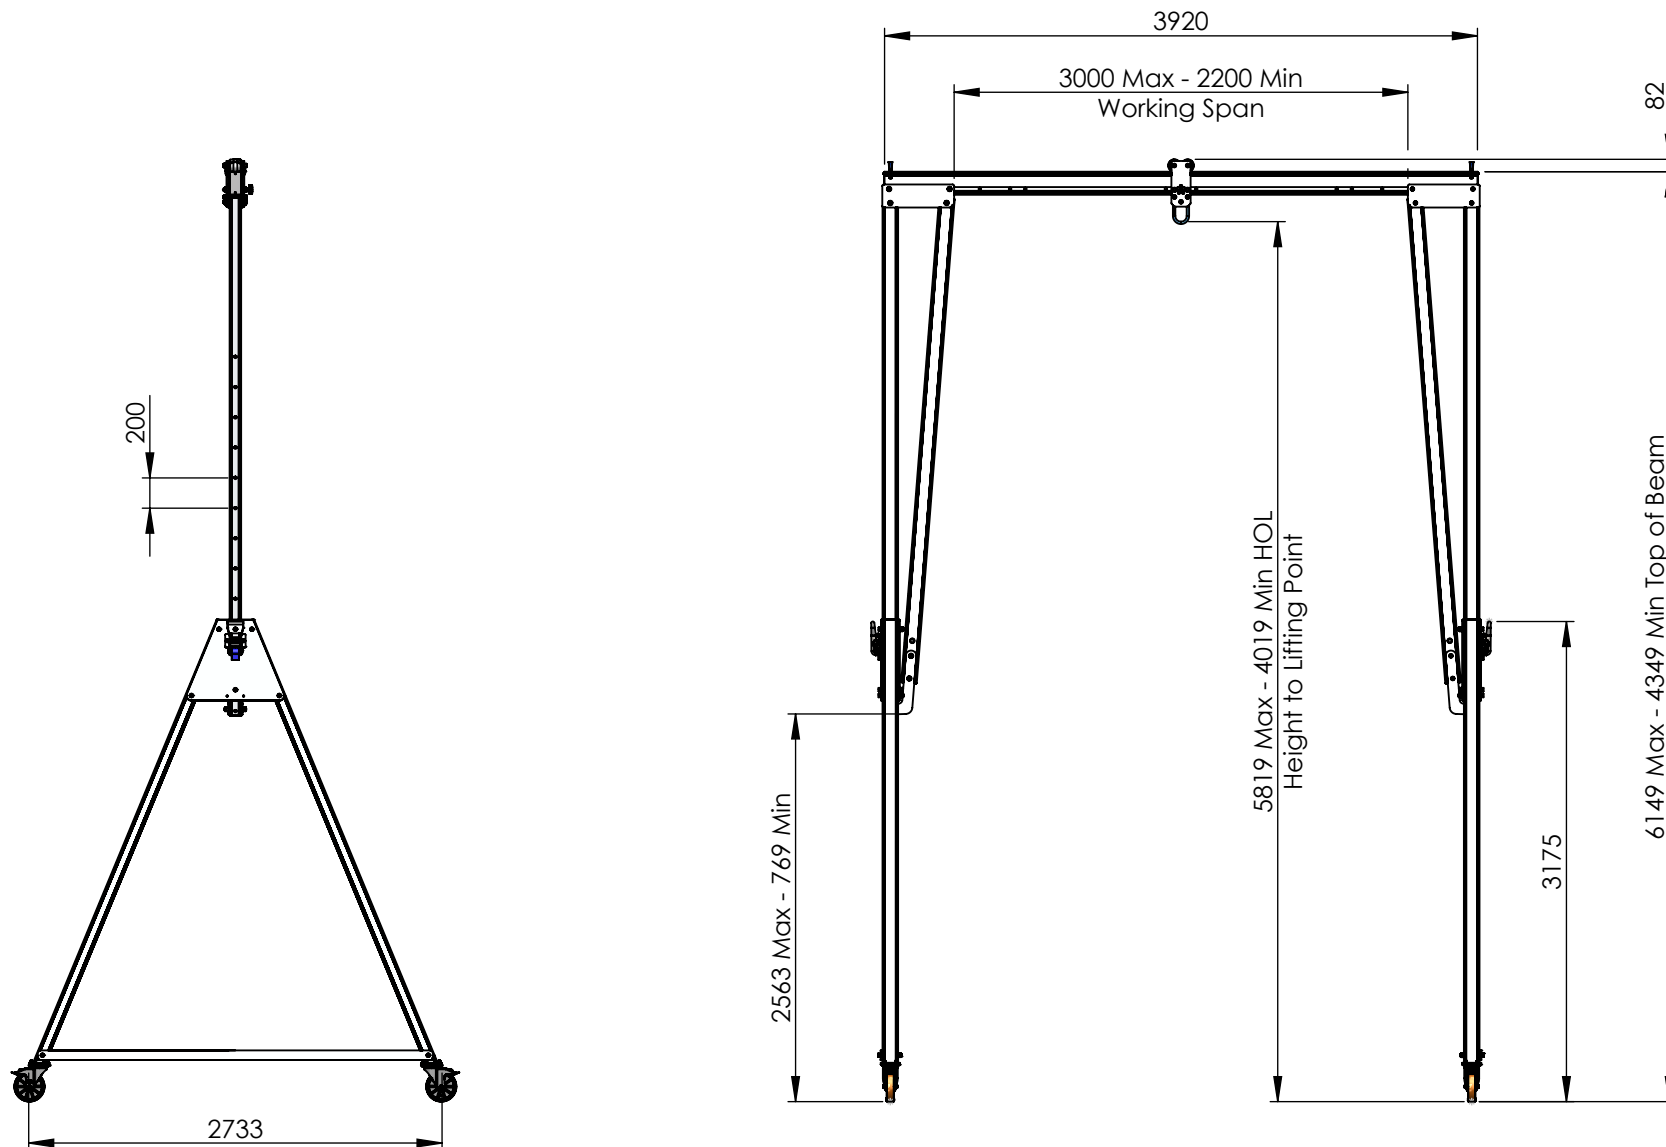

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	BJ	30/10/2020	Anodised
CHK'D			
APPV'D	CM	09/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size TC1
3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC1-3920A

A4

Estimated Weight: 233kg

1:50

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 5-10 mm at centre of span
- Maximum castor surface pressure at full load - 13.7 MPa
- Assembled gantry weight (excluding trolleys) - 233kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference



Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	30/10/2020
CHK'D		
APPV'D	CM	09/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC1 3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC1-3920A

A4



Estimated Weight: 233kg

1:50

SHEET 2 OF 2



To Ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-frame

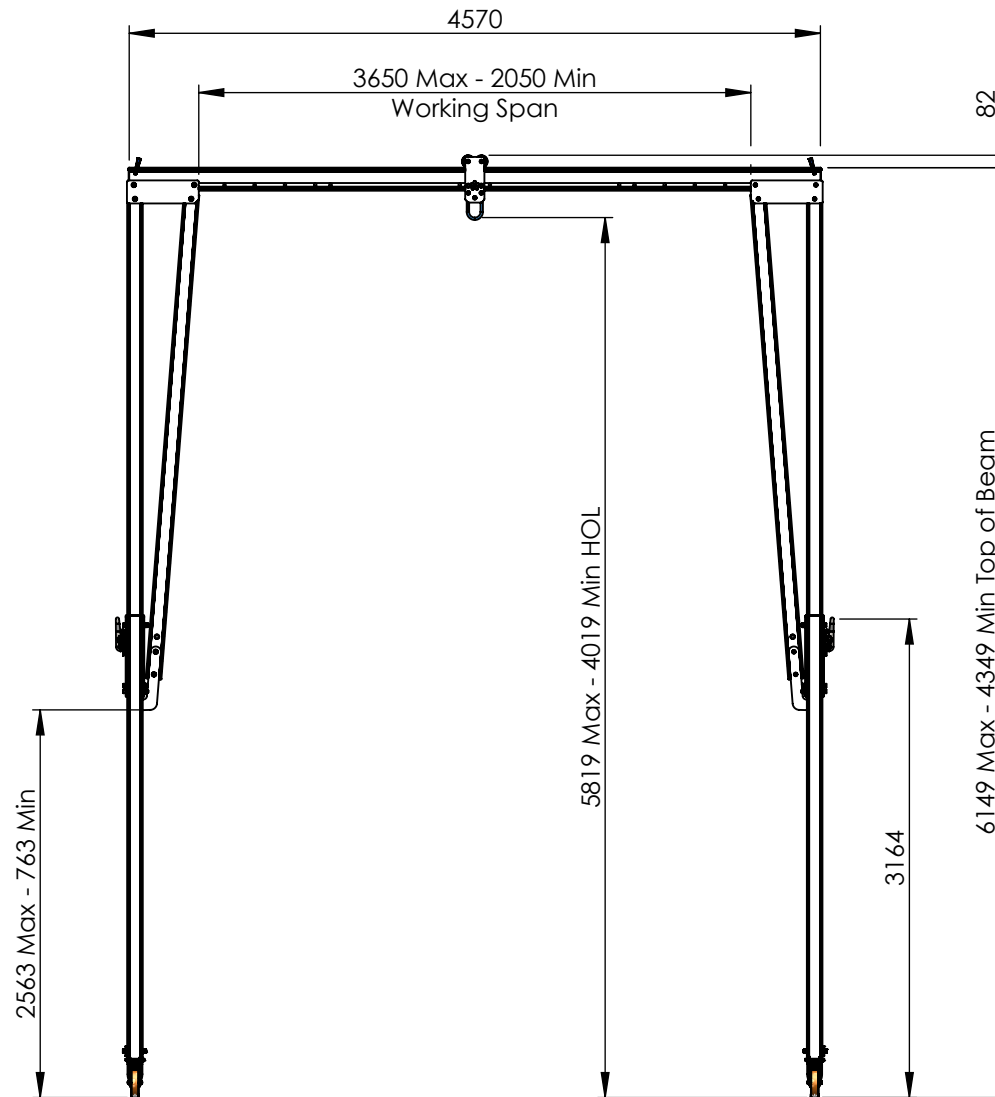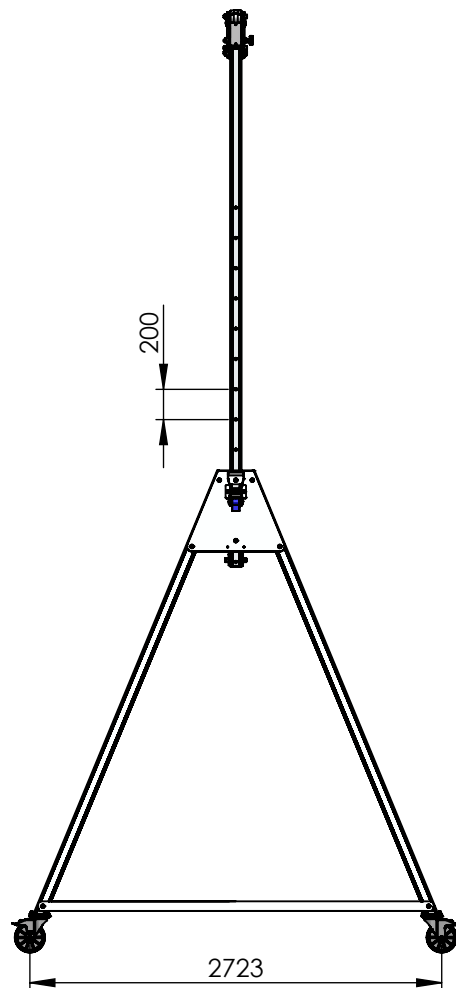

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	BJ	15/07/2020	Anodised
APPV'D	CM	10/03/2023	MATERIAL:
UNLESS OTHERWISE SPECIFIED:			Aluminium Alloy
DIMENSIONS ARE IN MILLIMETERS			

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size TC1
4570mm Beam WLL500kg**

DWG NO.

PGSS00500TC1-4570A

A4

Estimated Weight: 237kg

1:50

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 10-15 mm at centre of span
- Maximum castor surface pressure at full load - 13.75 MPa
- Assembled gantry weight (excluding trolleys) - 238kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

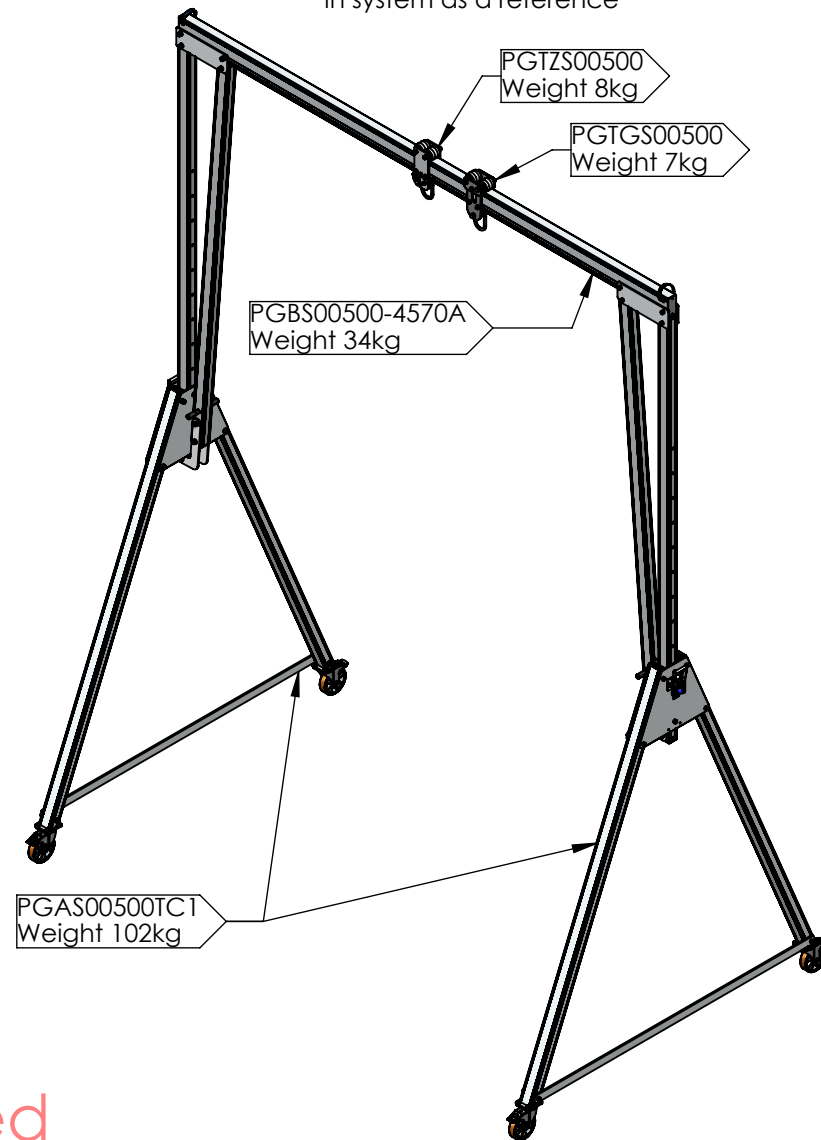

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	15/07/2020
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC1
4570mm Beam WLL500kg**

DWG NO.



PGSS00500TC1-4570A

A4

Estimated Weight: 238kg

1:50

SHEET 2 OF 2

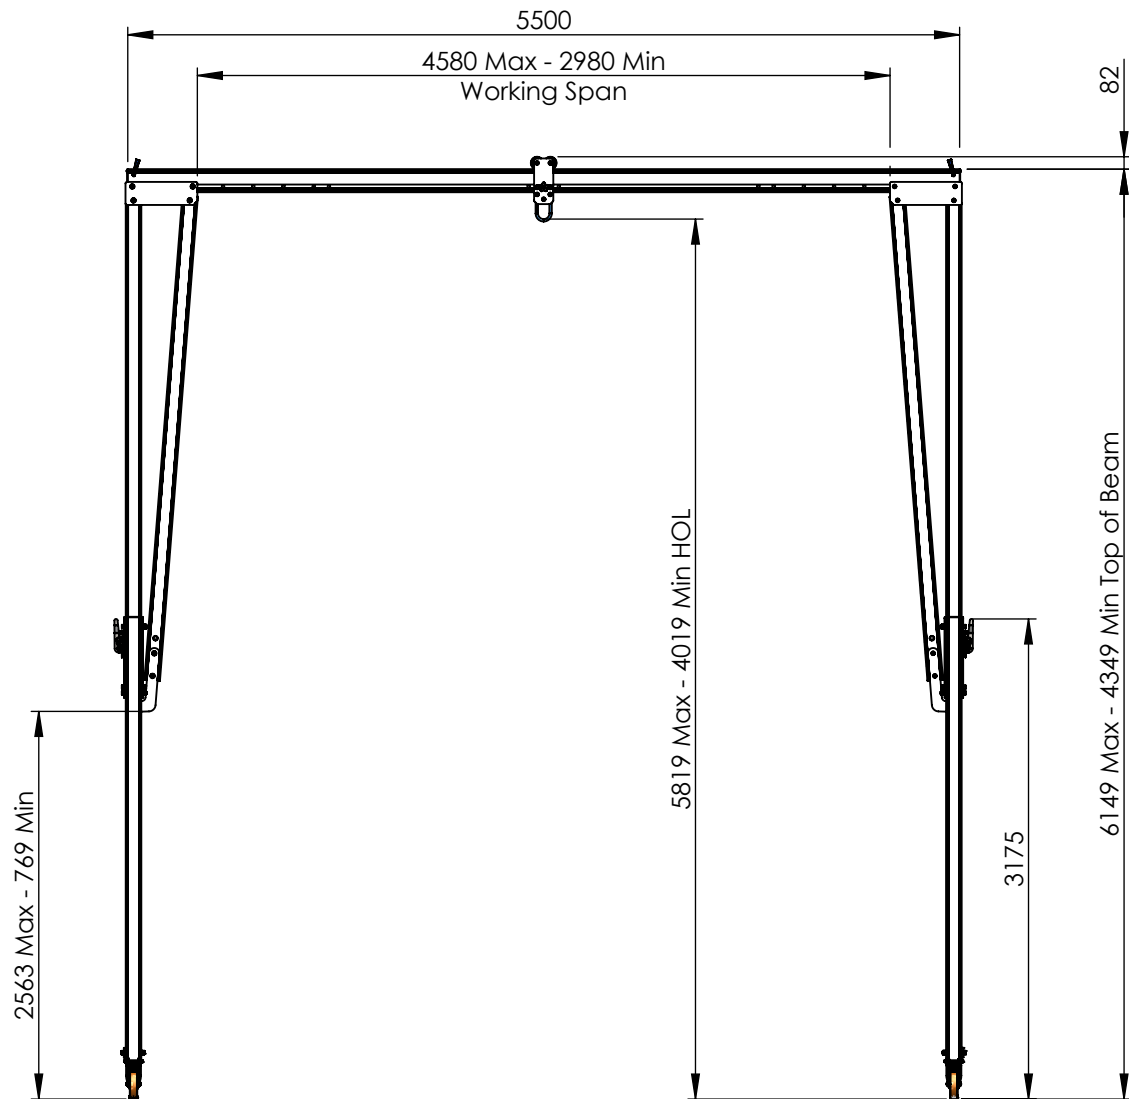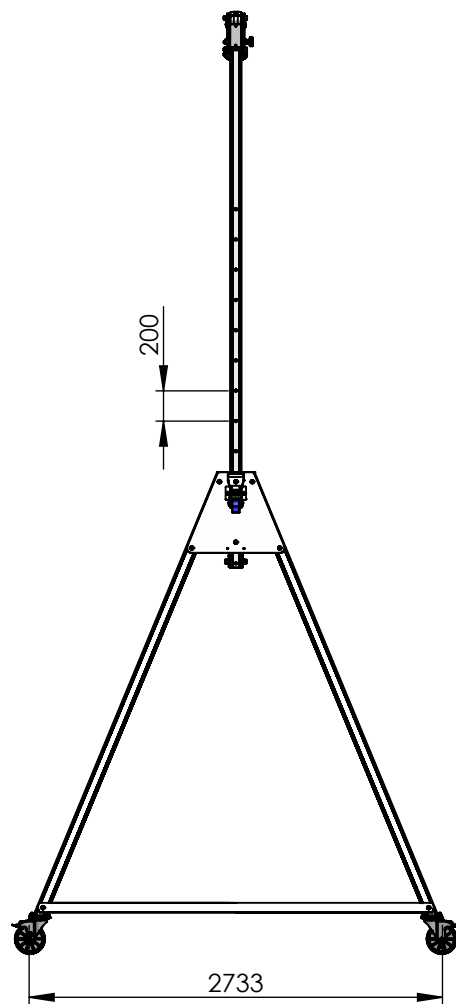

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	14/06/2021	Anodised
APPV'D	CM	10/03/2023	MATERIAL:
Aluminium Alloy			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:	General Arrangement of REID Lifting Porta-Gantry size TC1 5500mm Beam WLL500kg		
DWG NO.	PGSS00500TC1-5500A	A4	
Estimated Weight:	244kg	1:50	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 20-30 mm at centre of span
- Maximum castor surface pressure at full load - 13.83 MPa
- Assembled gantry weight (excluding trolleys) - 245kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 2 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

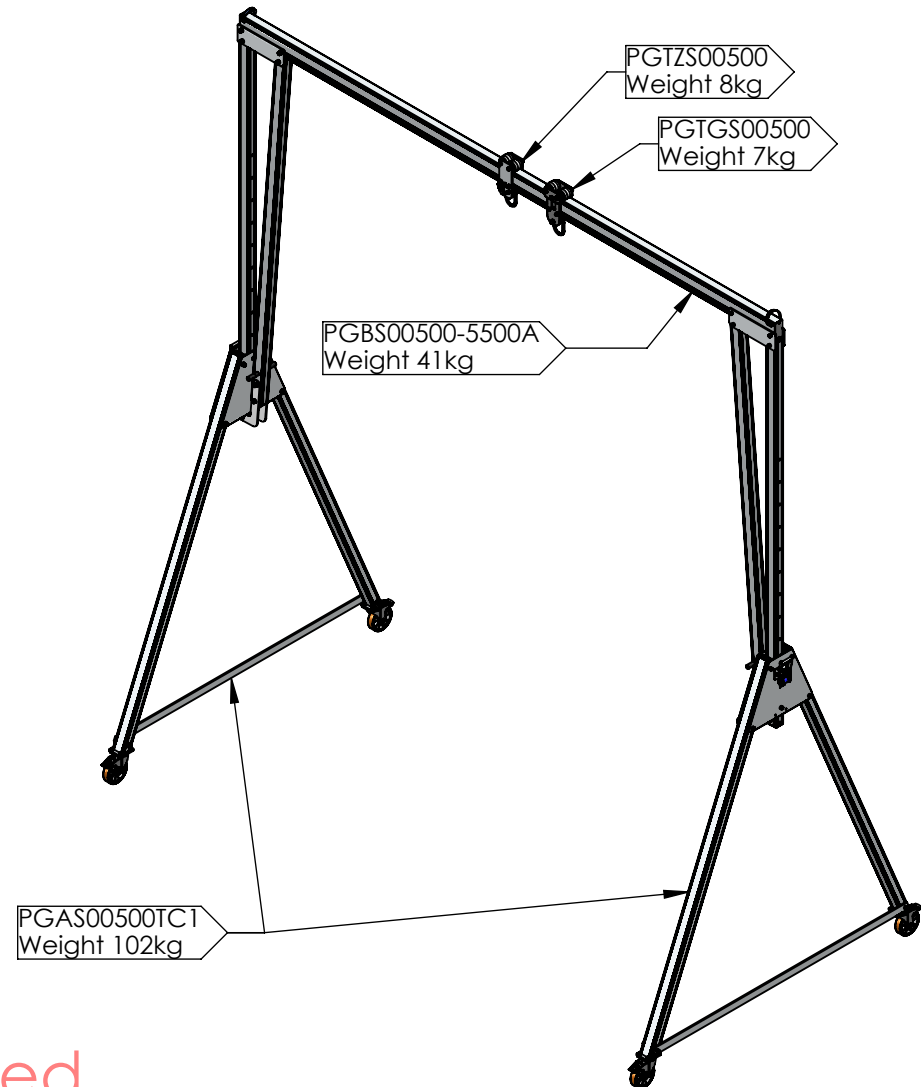

Approved

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	14/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS
THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE
REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT
AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND
MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY
UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID
Lifting Porta-Gantry size TC1
5500mm Beam WLL500kg**

DWG NO.


PGSS00500TC1-5500A

A4

Estimated Weight: 245kg

1:55

SHEET 2 OF 2

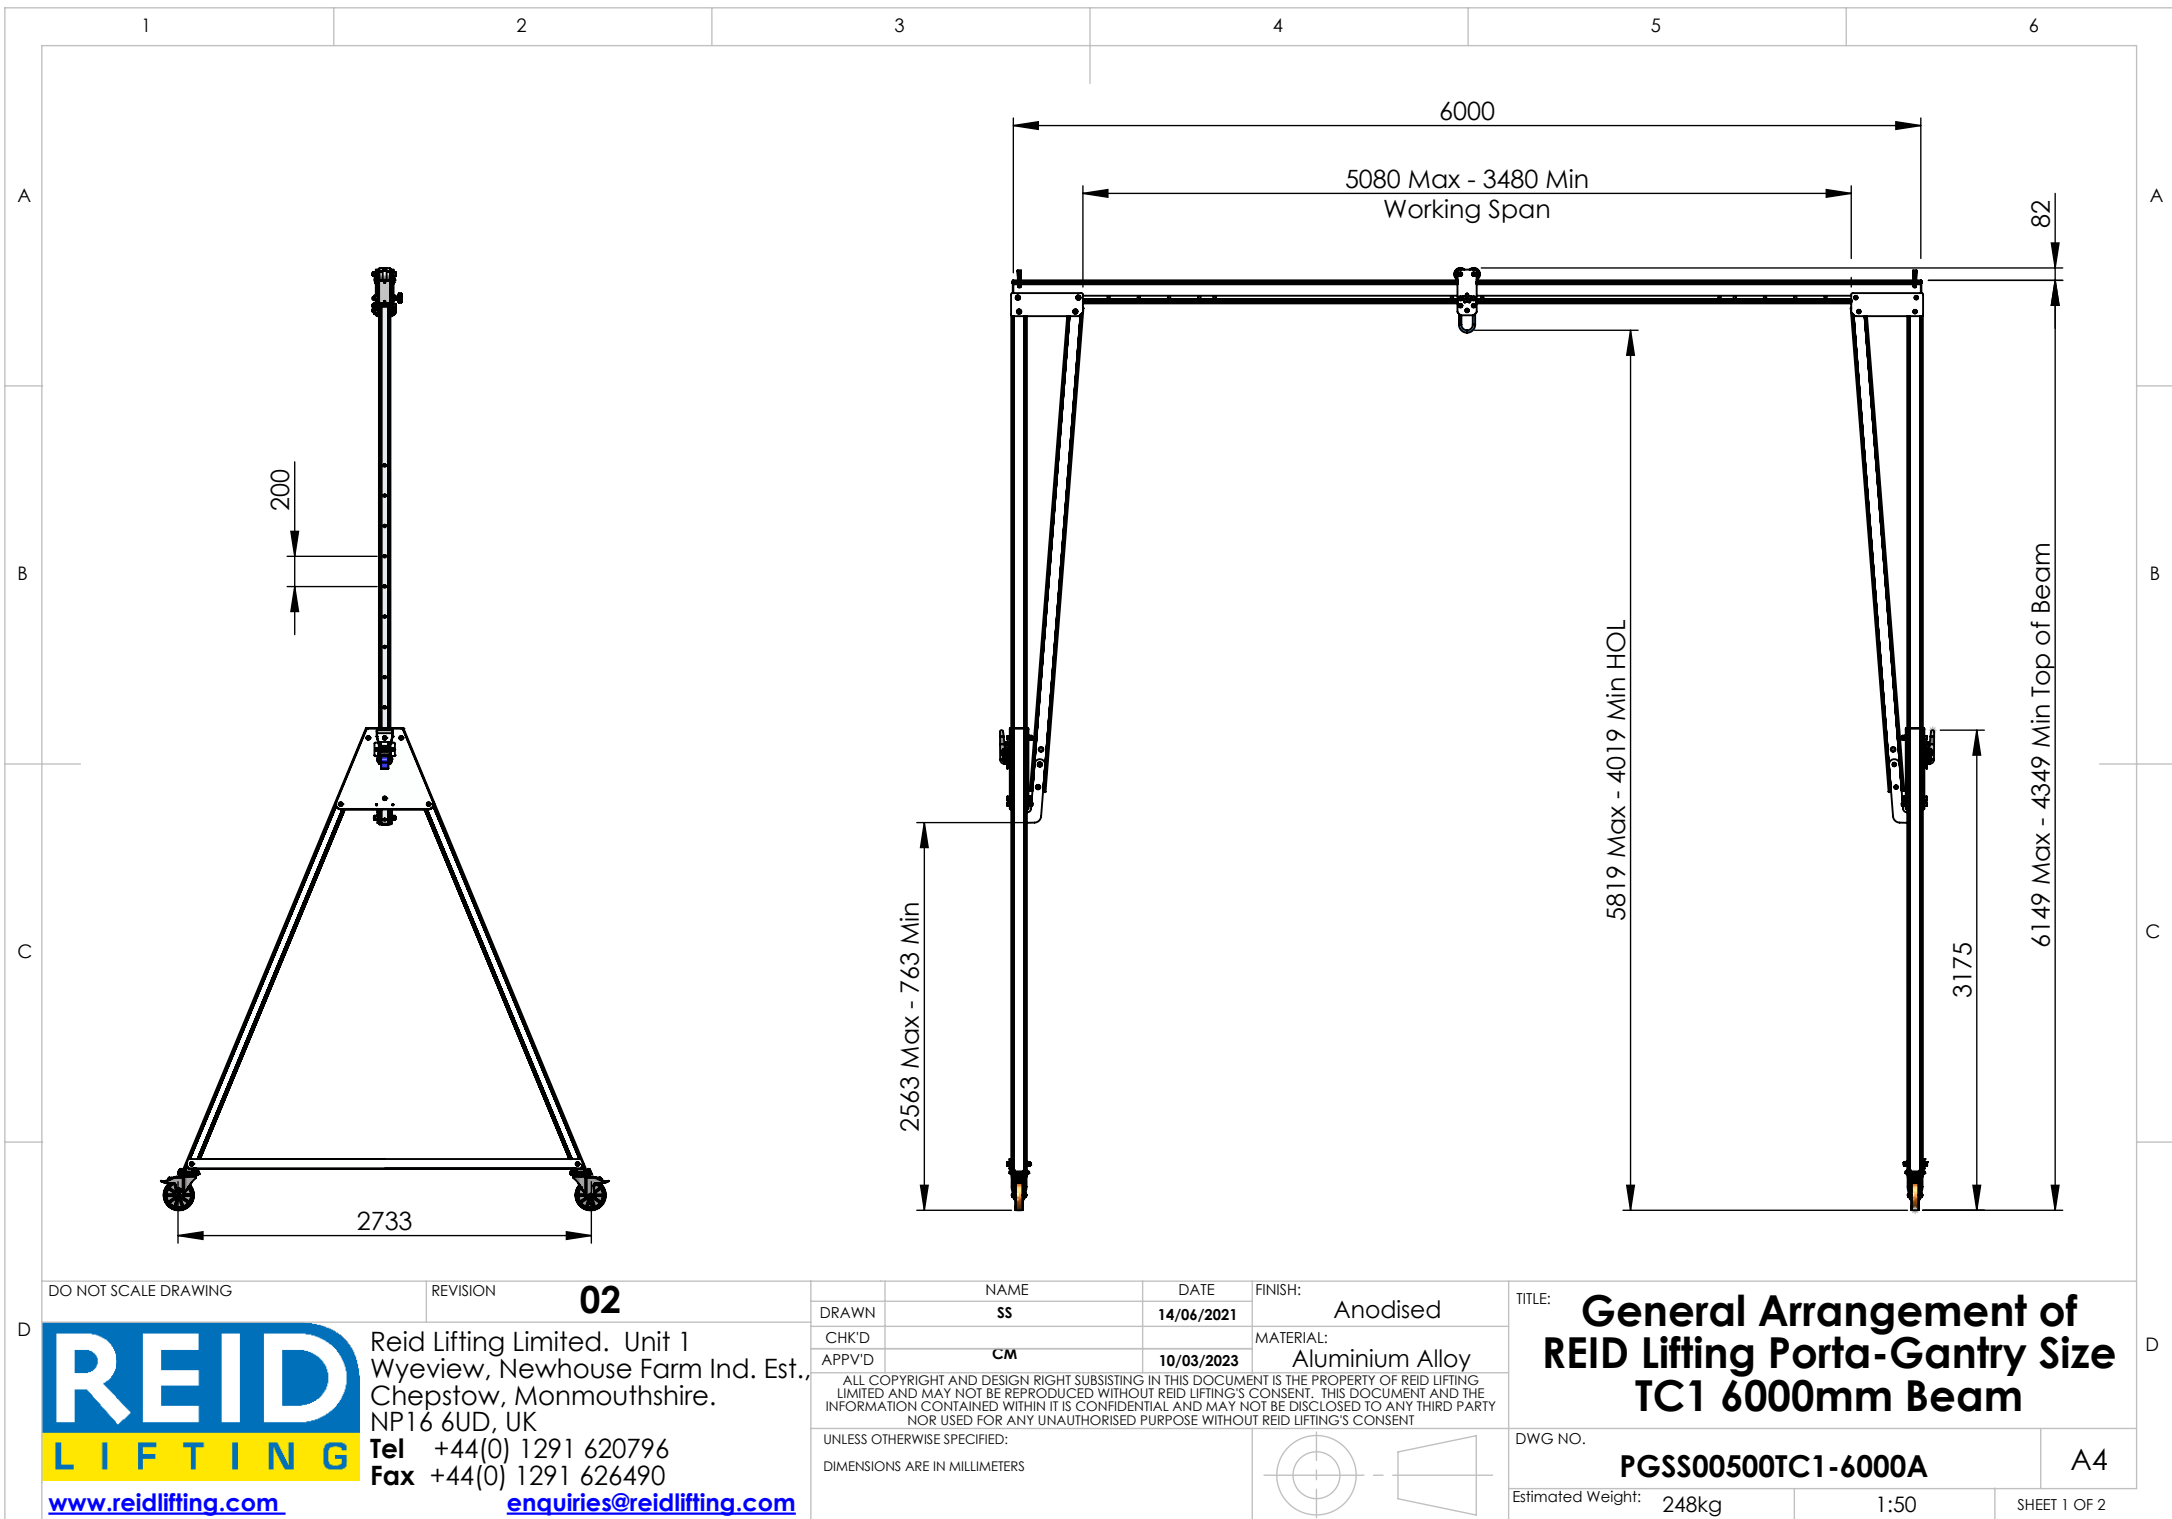

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 25-35 mm at centre of span
- Maximum castor surface pressure at full load - 13.87 MPa
- Assembled gantry weight (excluding trolleys) - 248kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 2 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

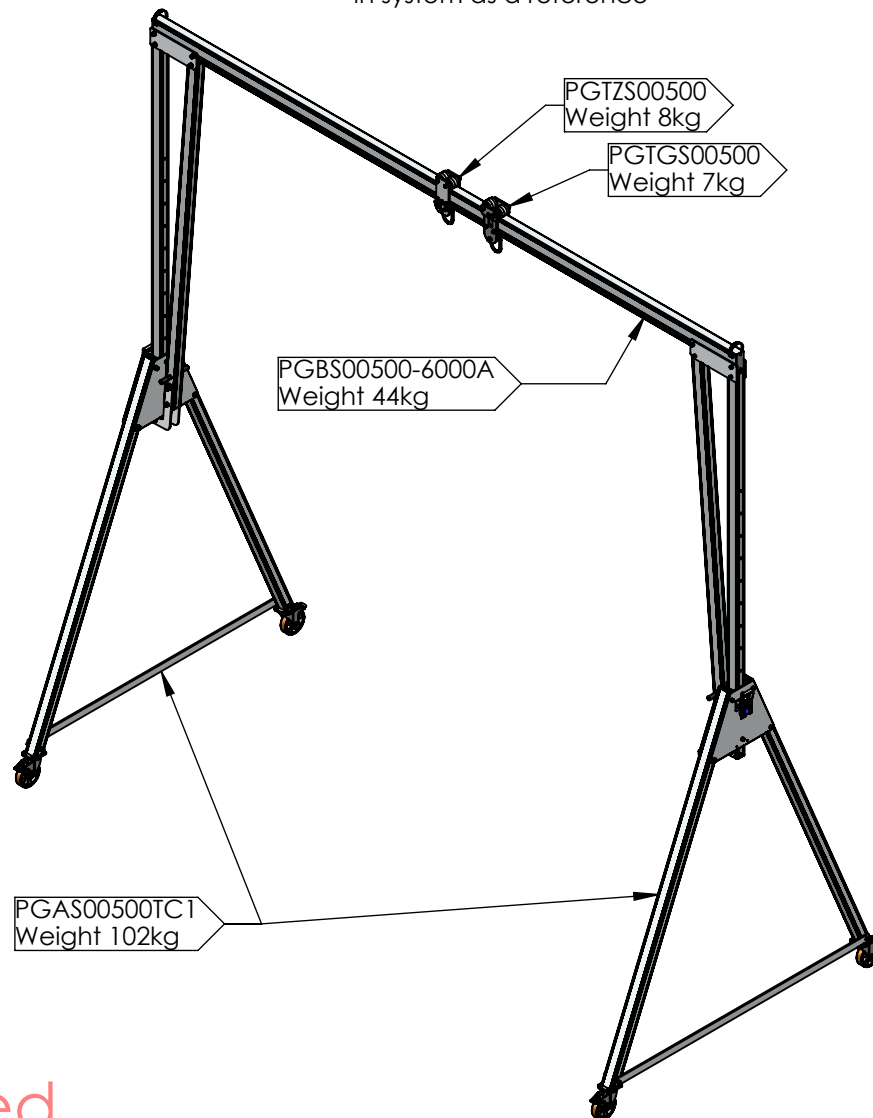

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	14/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of
REID Lifting Porta-Gantry
Size TC1 6000mm Beam**

DWG NO.


PGSS00500TC1-6000A

A4

Estimated Weight: 248kg

1:55

SHEET 2 OF 2

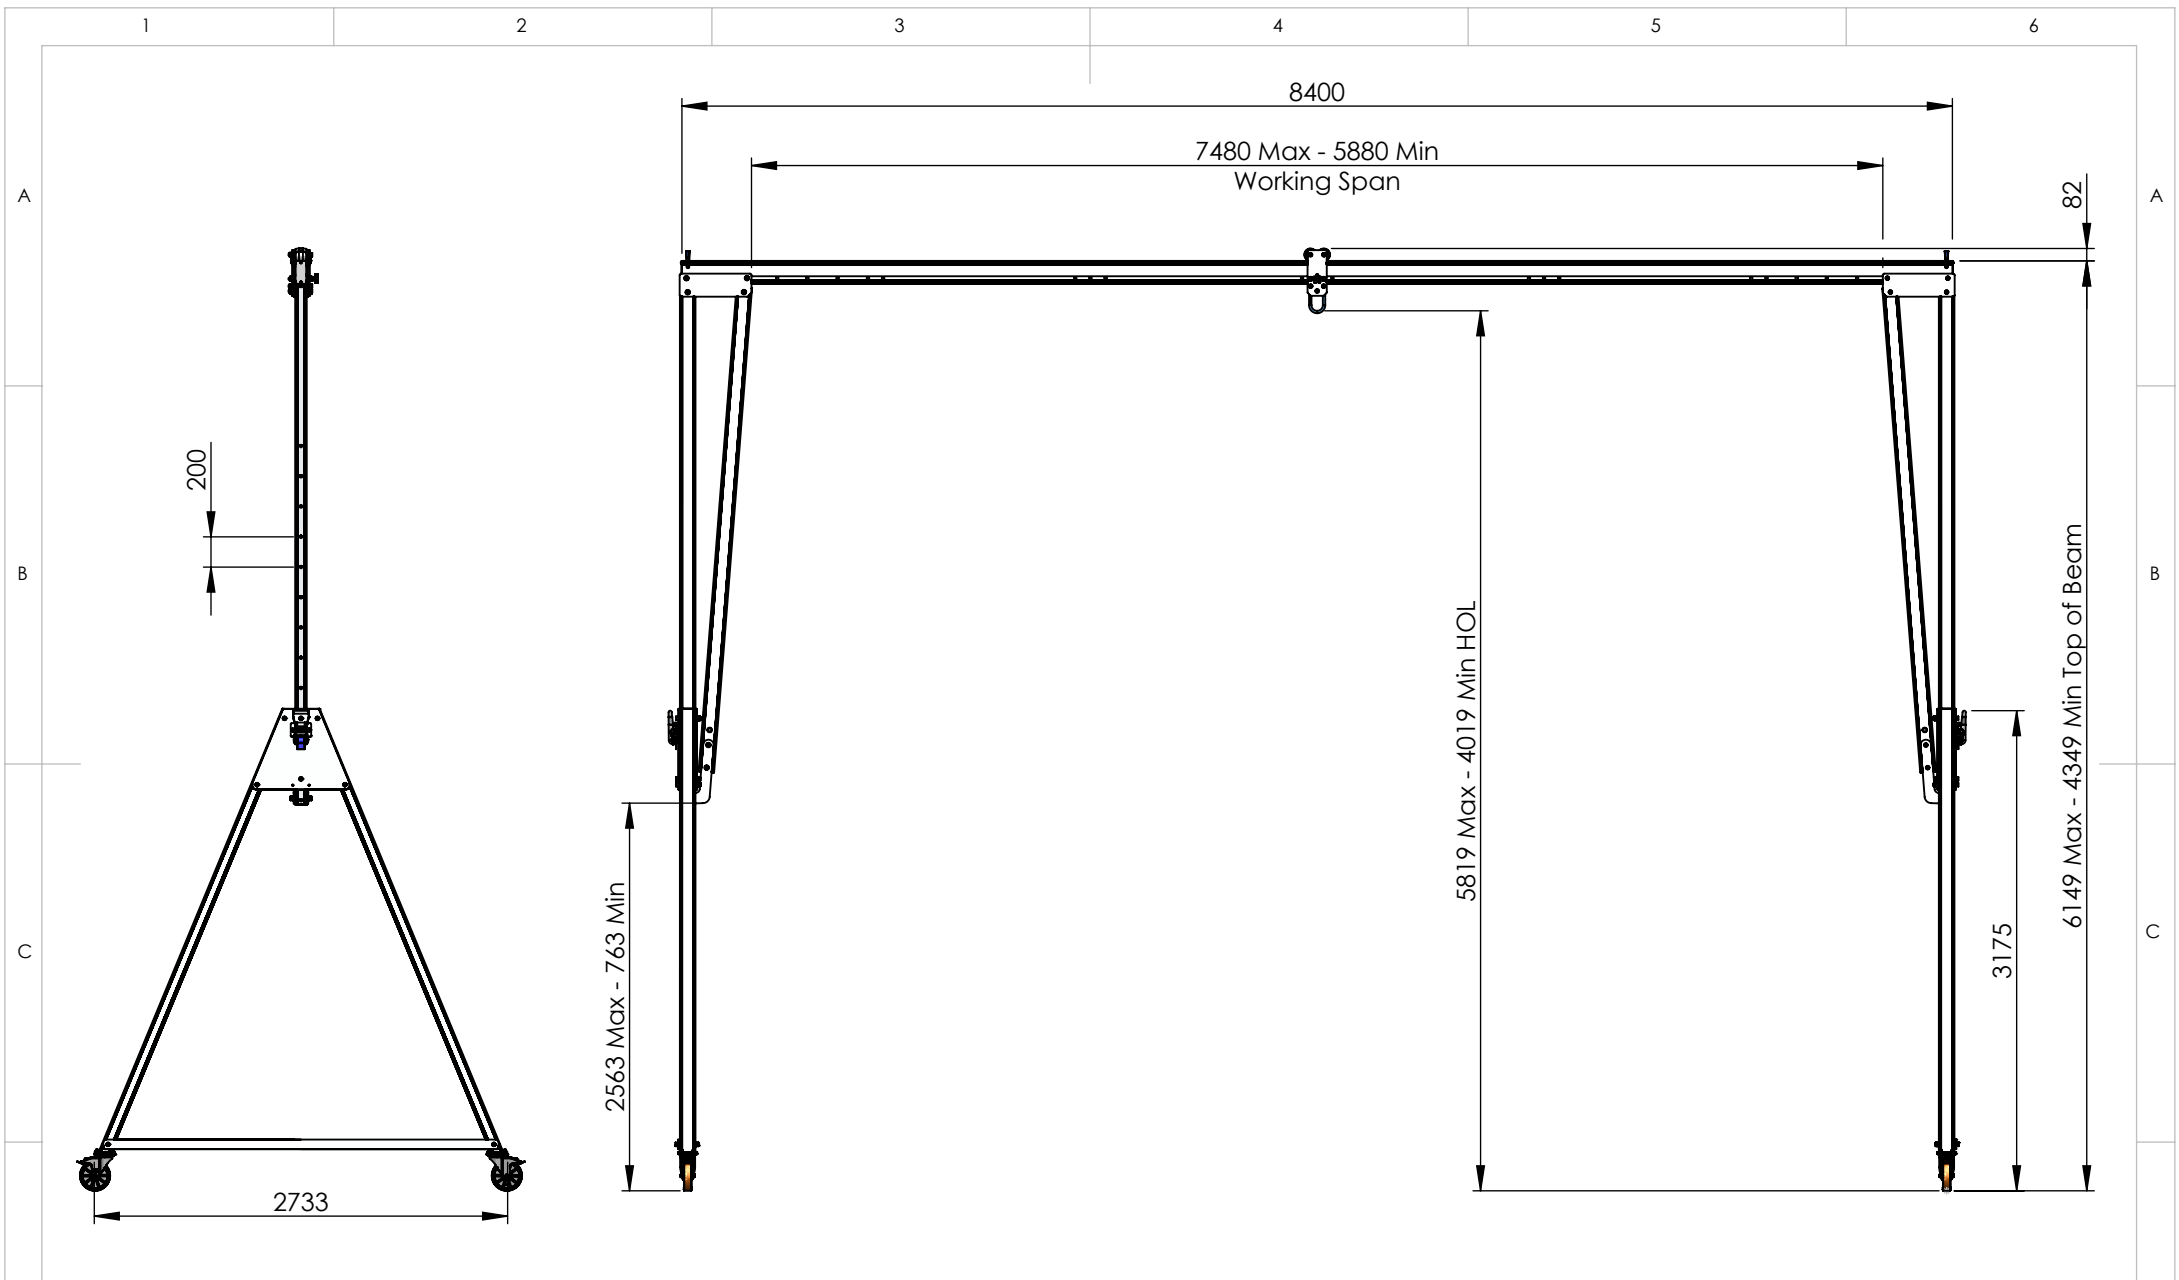

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	14/06/2021	Anodised
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: General Arrangement of REID Lifting Porta-Gantry Size TC1 8400mm Beam		DWG NO. PGSS00500TC1-8400A		A4	
Estimated Weight: 265kg		1:50		SHEET 1 OF 2	

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 60-70 mm at centre of span
- Maximum castor surface pressure at full load - 14.06 MPa
- Assembled gantry weight (excluding trolleys) - 266kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 2 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

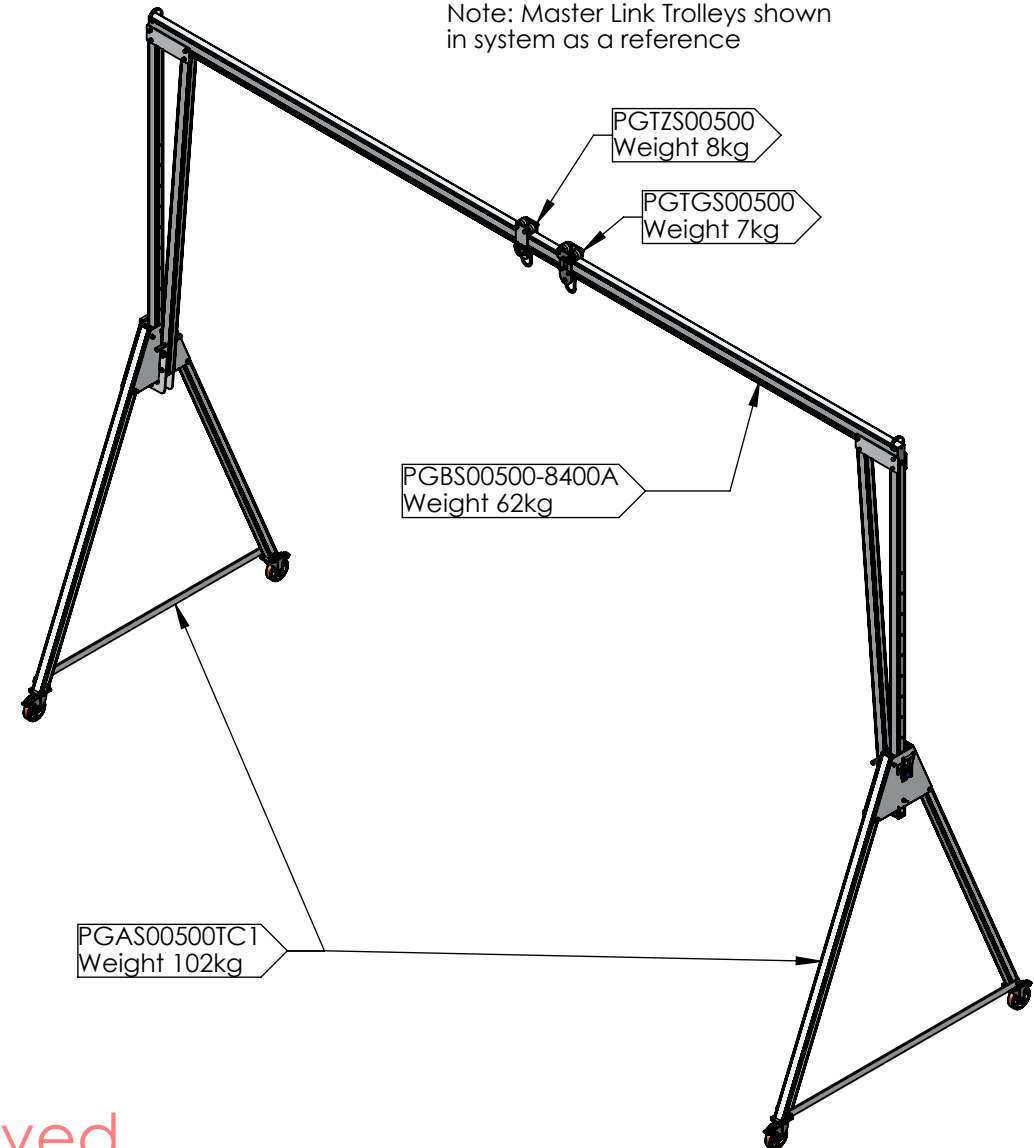

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	14/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of
REID Lifting Porta-Gantry
Size TC1 8400mm Beam**

DWG NO.


PGSS00500TC1-8400A

A4

Estimated Weight: 266kg

1:60

SHEET 2 OF 2

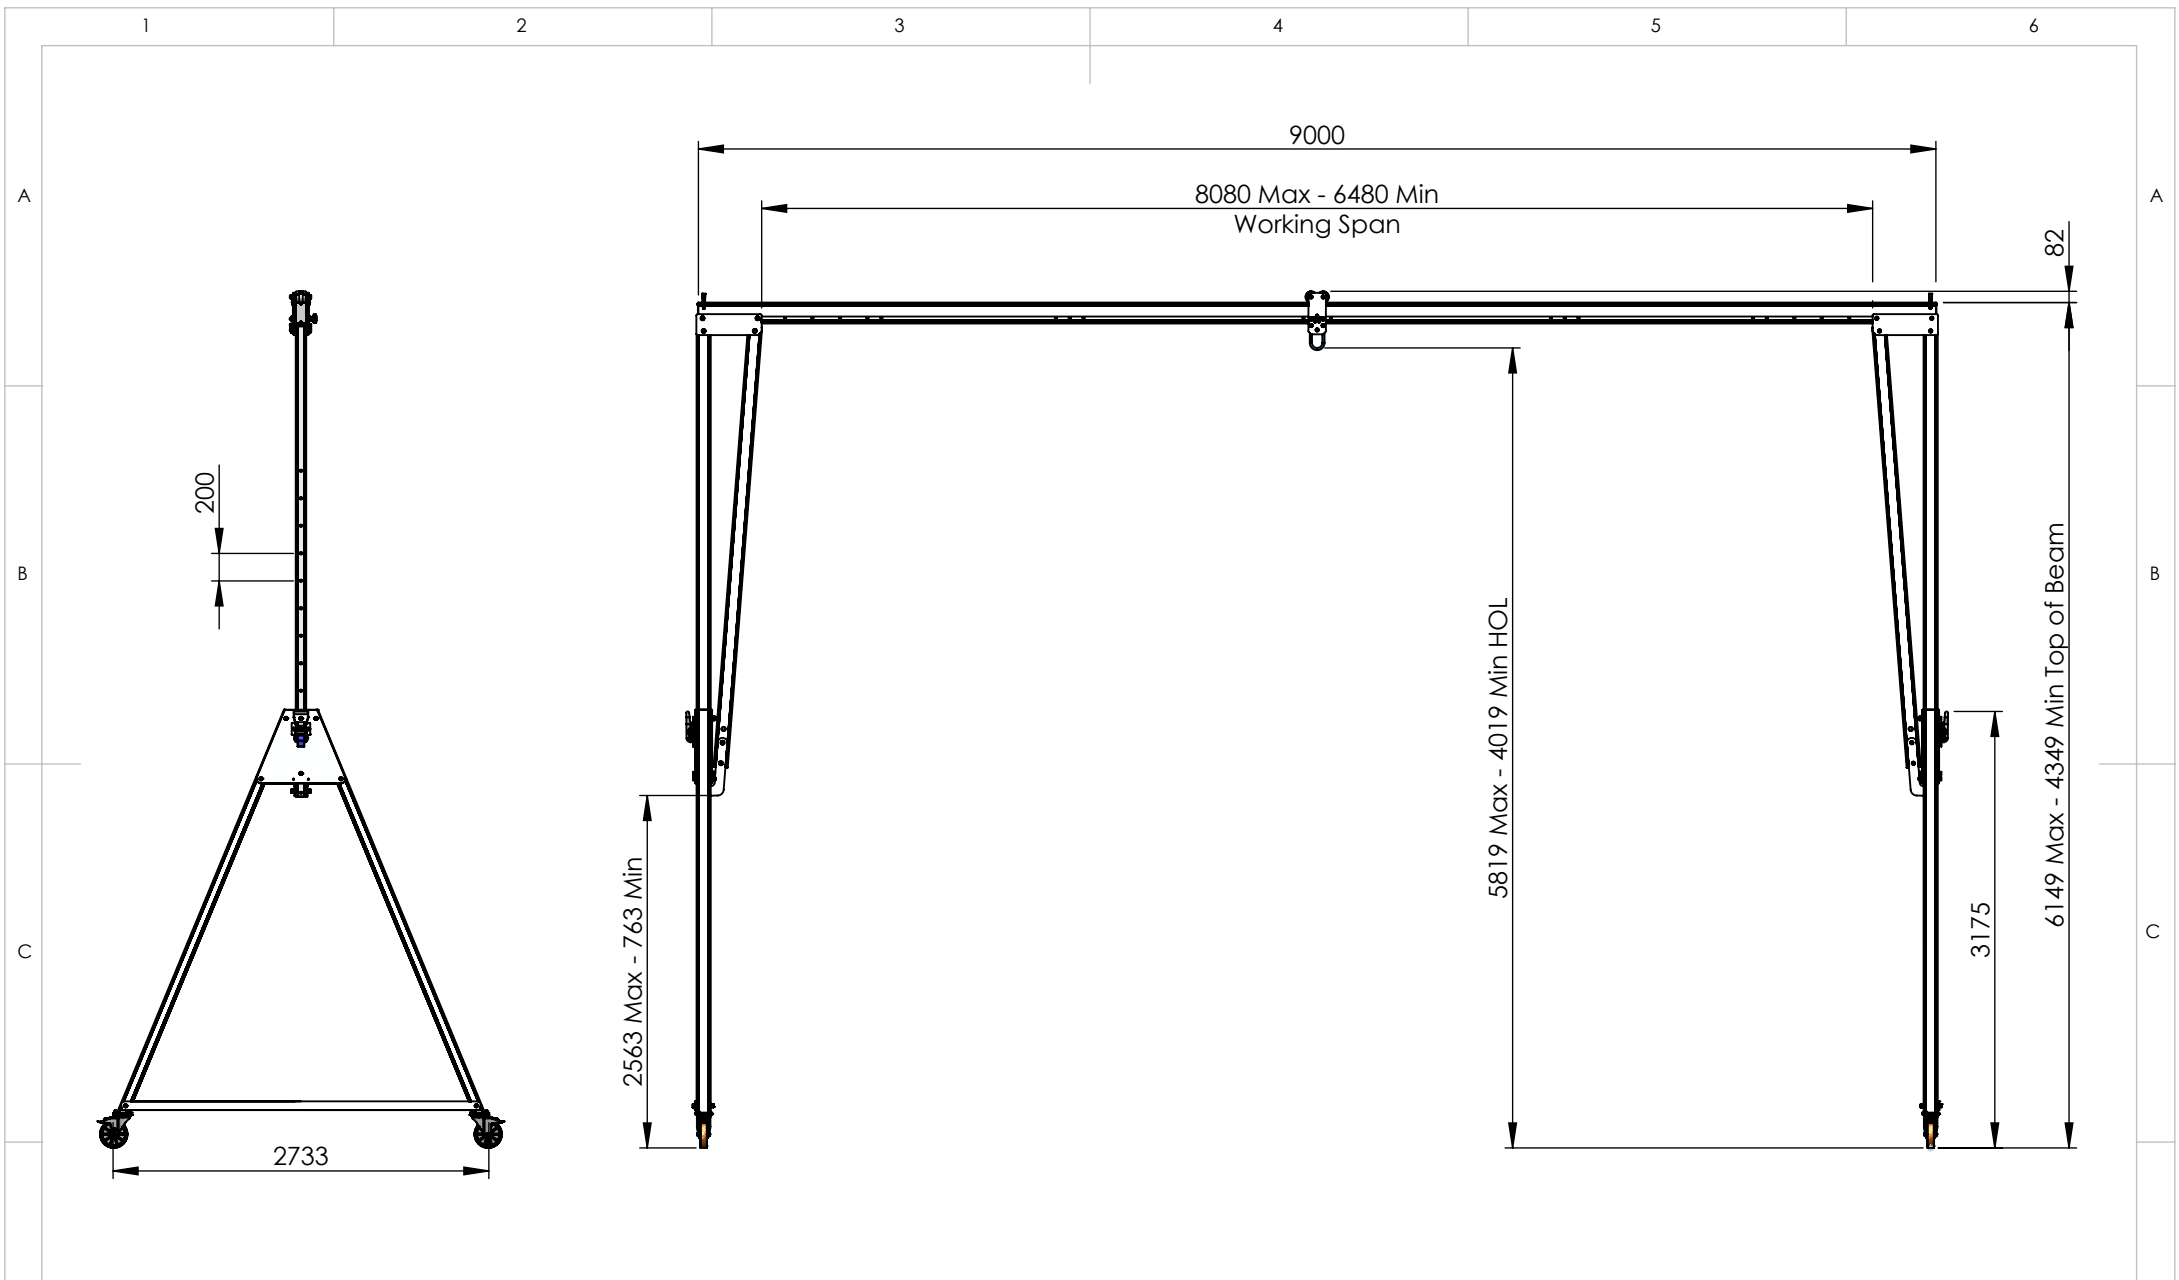

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	14/06/2021	Anodised
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: General Arrangement of REID Lifting Porta-Gantry Size TC1 9000mm Beam		DWG NO. PGSS00500TC1-9000A	A4
Estimated Weight: 270kg	1:55	SHEET 1 OF 2	

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 80-90 mm at centre of span
- Maximum castor surface pressure at full load - 14.11 MPa
- Assembled gantry weight (excluding trolleys) - 270kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 2 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

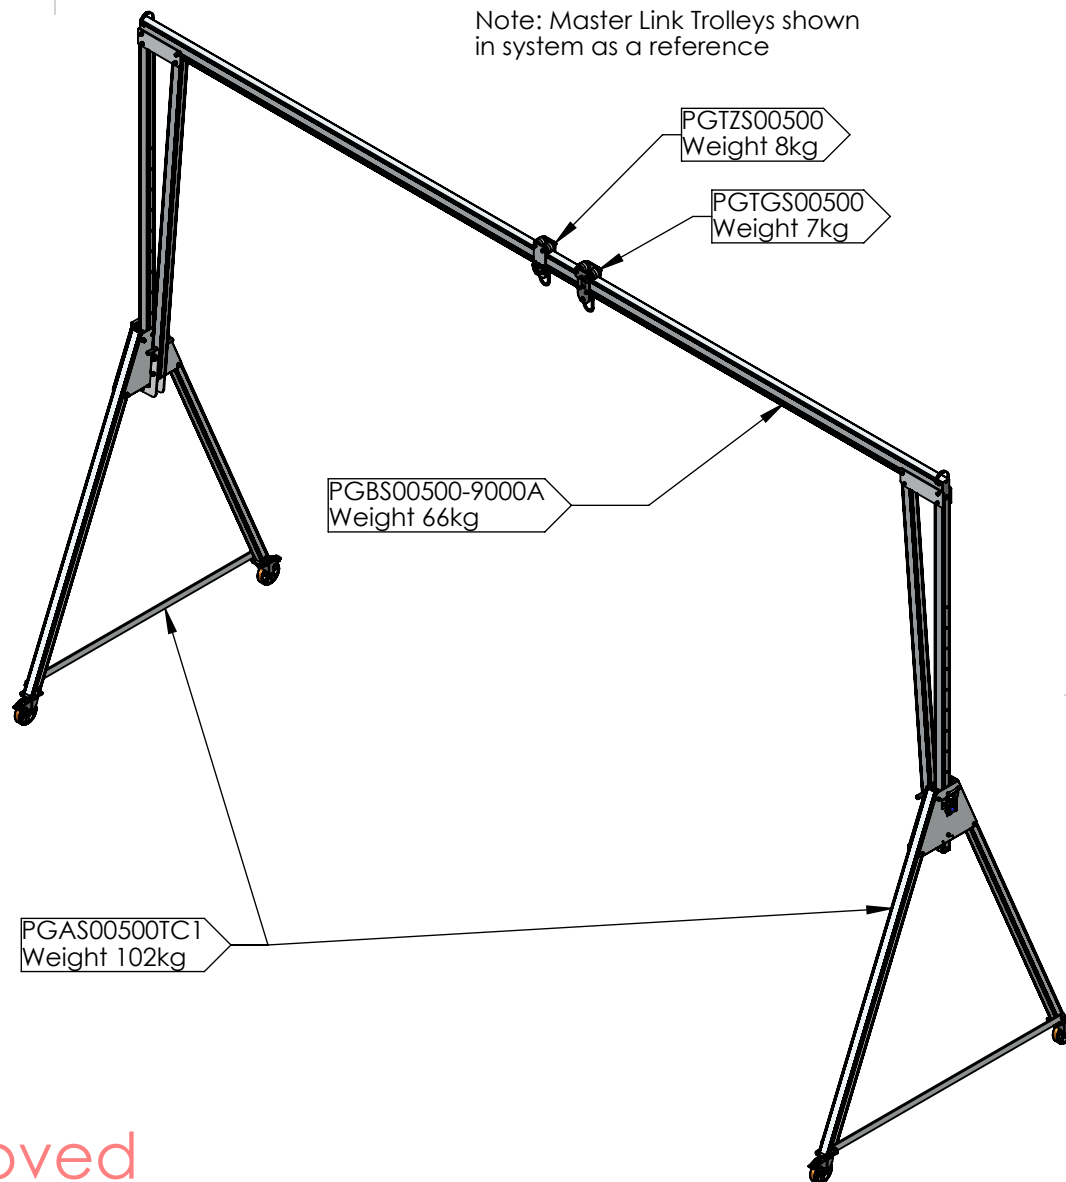

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	14/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of
REID Lifting Porta-Gantry
Size TC1 9000mm Beam**

DWG NO.

PGSS00500TC1-9000A

A4



Estimated Weight: 270kg

1:60

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-frame

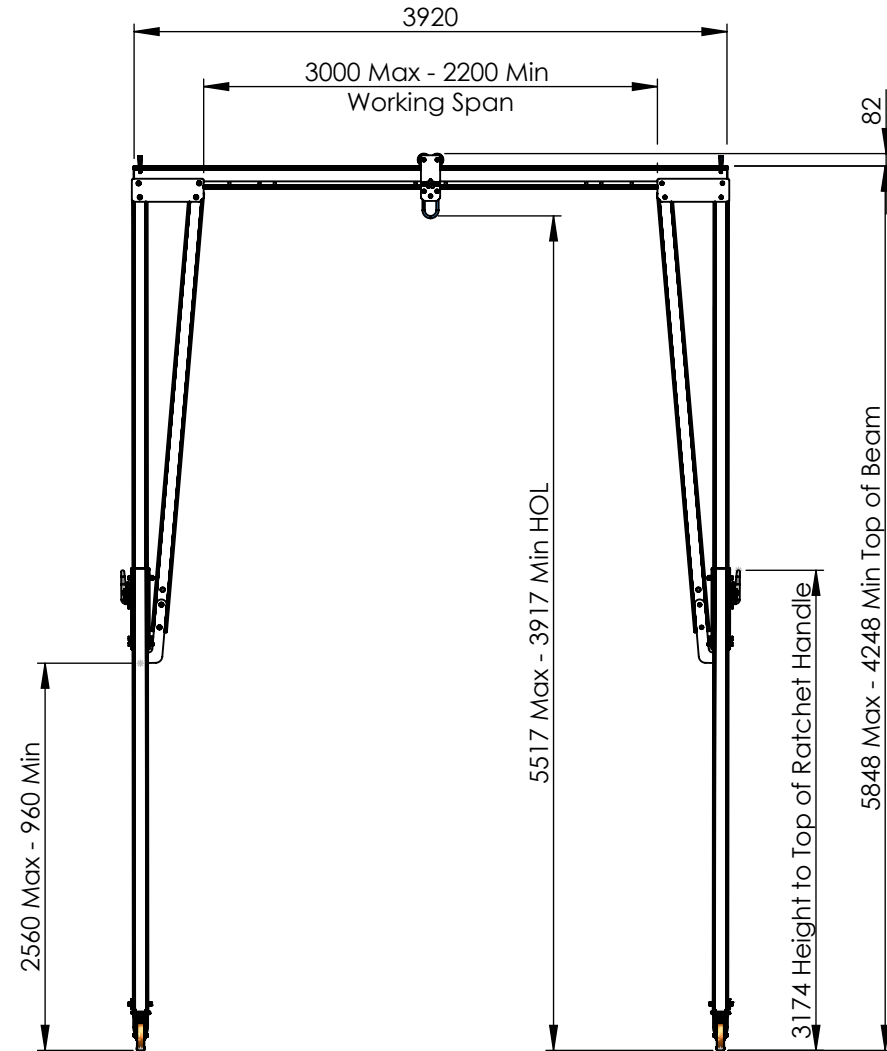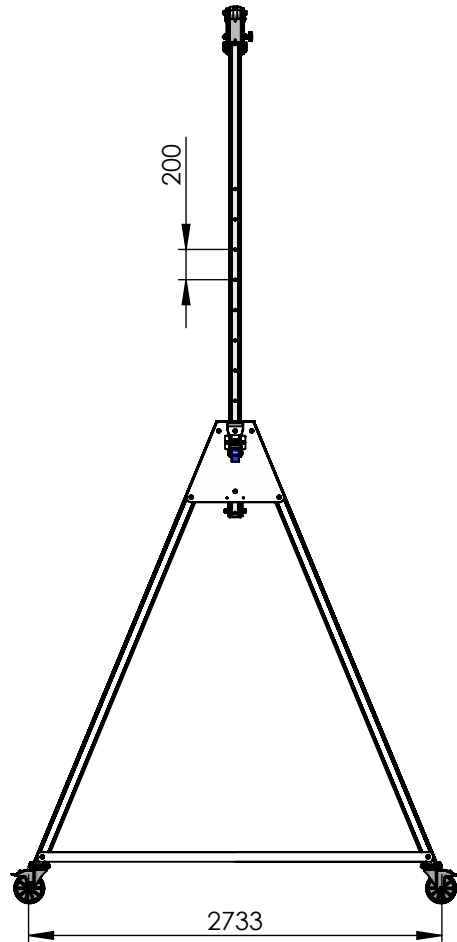

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		10/03/2023	
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC2 with
3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC2-3920A

A4

Estimated Weight: 223 kg

1:50

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 5-10 mm at centre of span
- Maximum castor surface pressure at full load - 13.59 MPa
- Assembled gantry weight (excluding trollies) - 223kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trollies shown in system as a reference



Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC2 with 3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC2-3920A

A4


Estimated Weight: 223 kg

1:55

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-frame

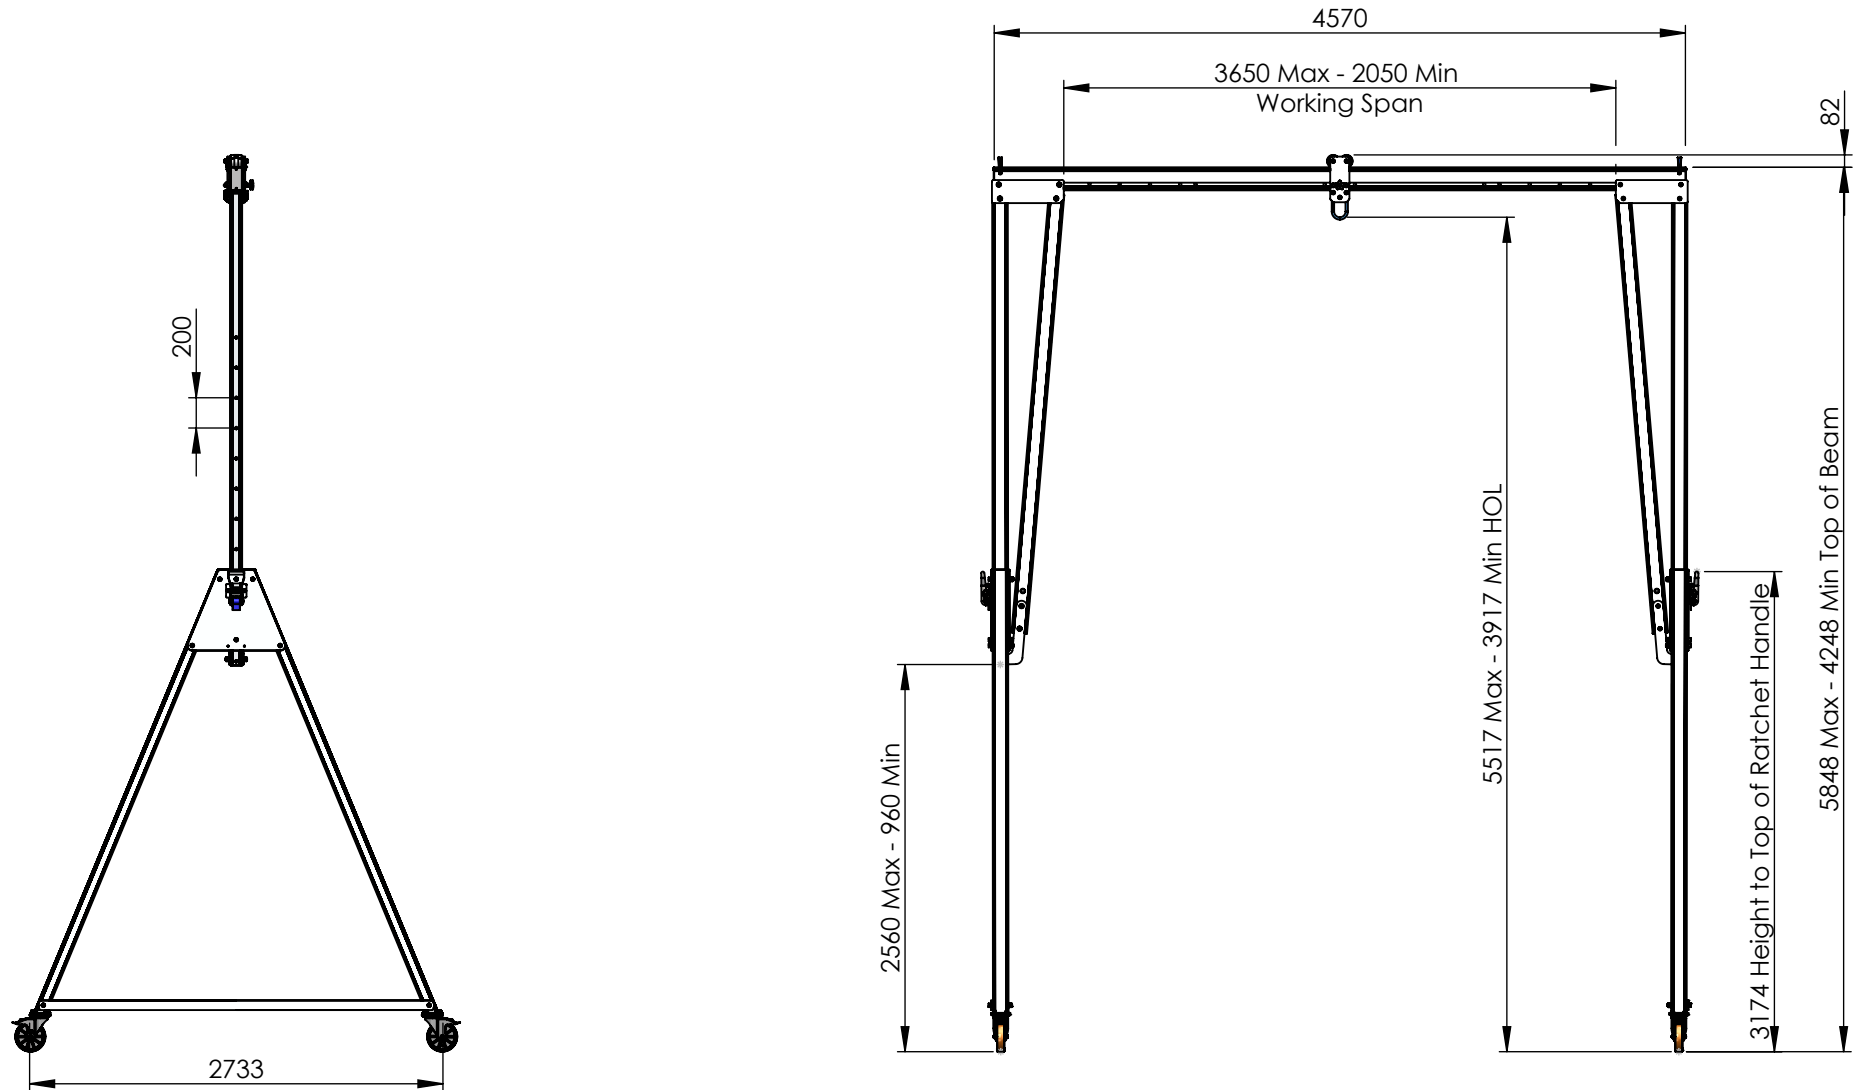

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796

Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		10/03/2023	MATERIAL:
APPV'D			Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC2 with
4570mm Beam WLL500kg**

DWG NO.

PGSS00500TC2-4570A

A4

Estimated Weight: 227 kg

1:50

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 10-15 mm at centre of span
- Maximum castor surface pressure at full load - 13.64 MPa
- Assembled gantry weight (excluding trollies) - 227kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference



Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC2 with 4570mm Beam WLL500kg**

DWG NO.


PGSS00500TC2-4570A

A4

Estimated Weight: 227 kg

1:55

SHEET 2 OF 2

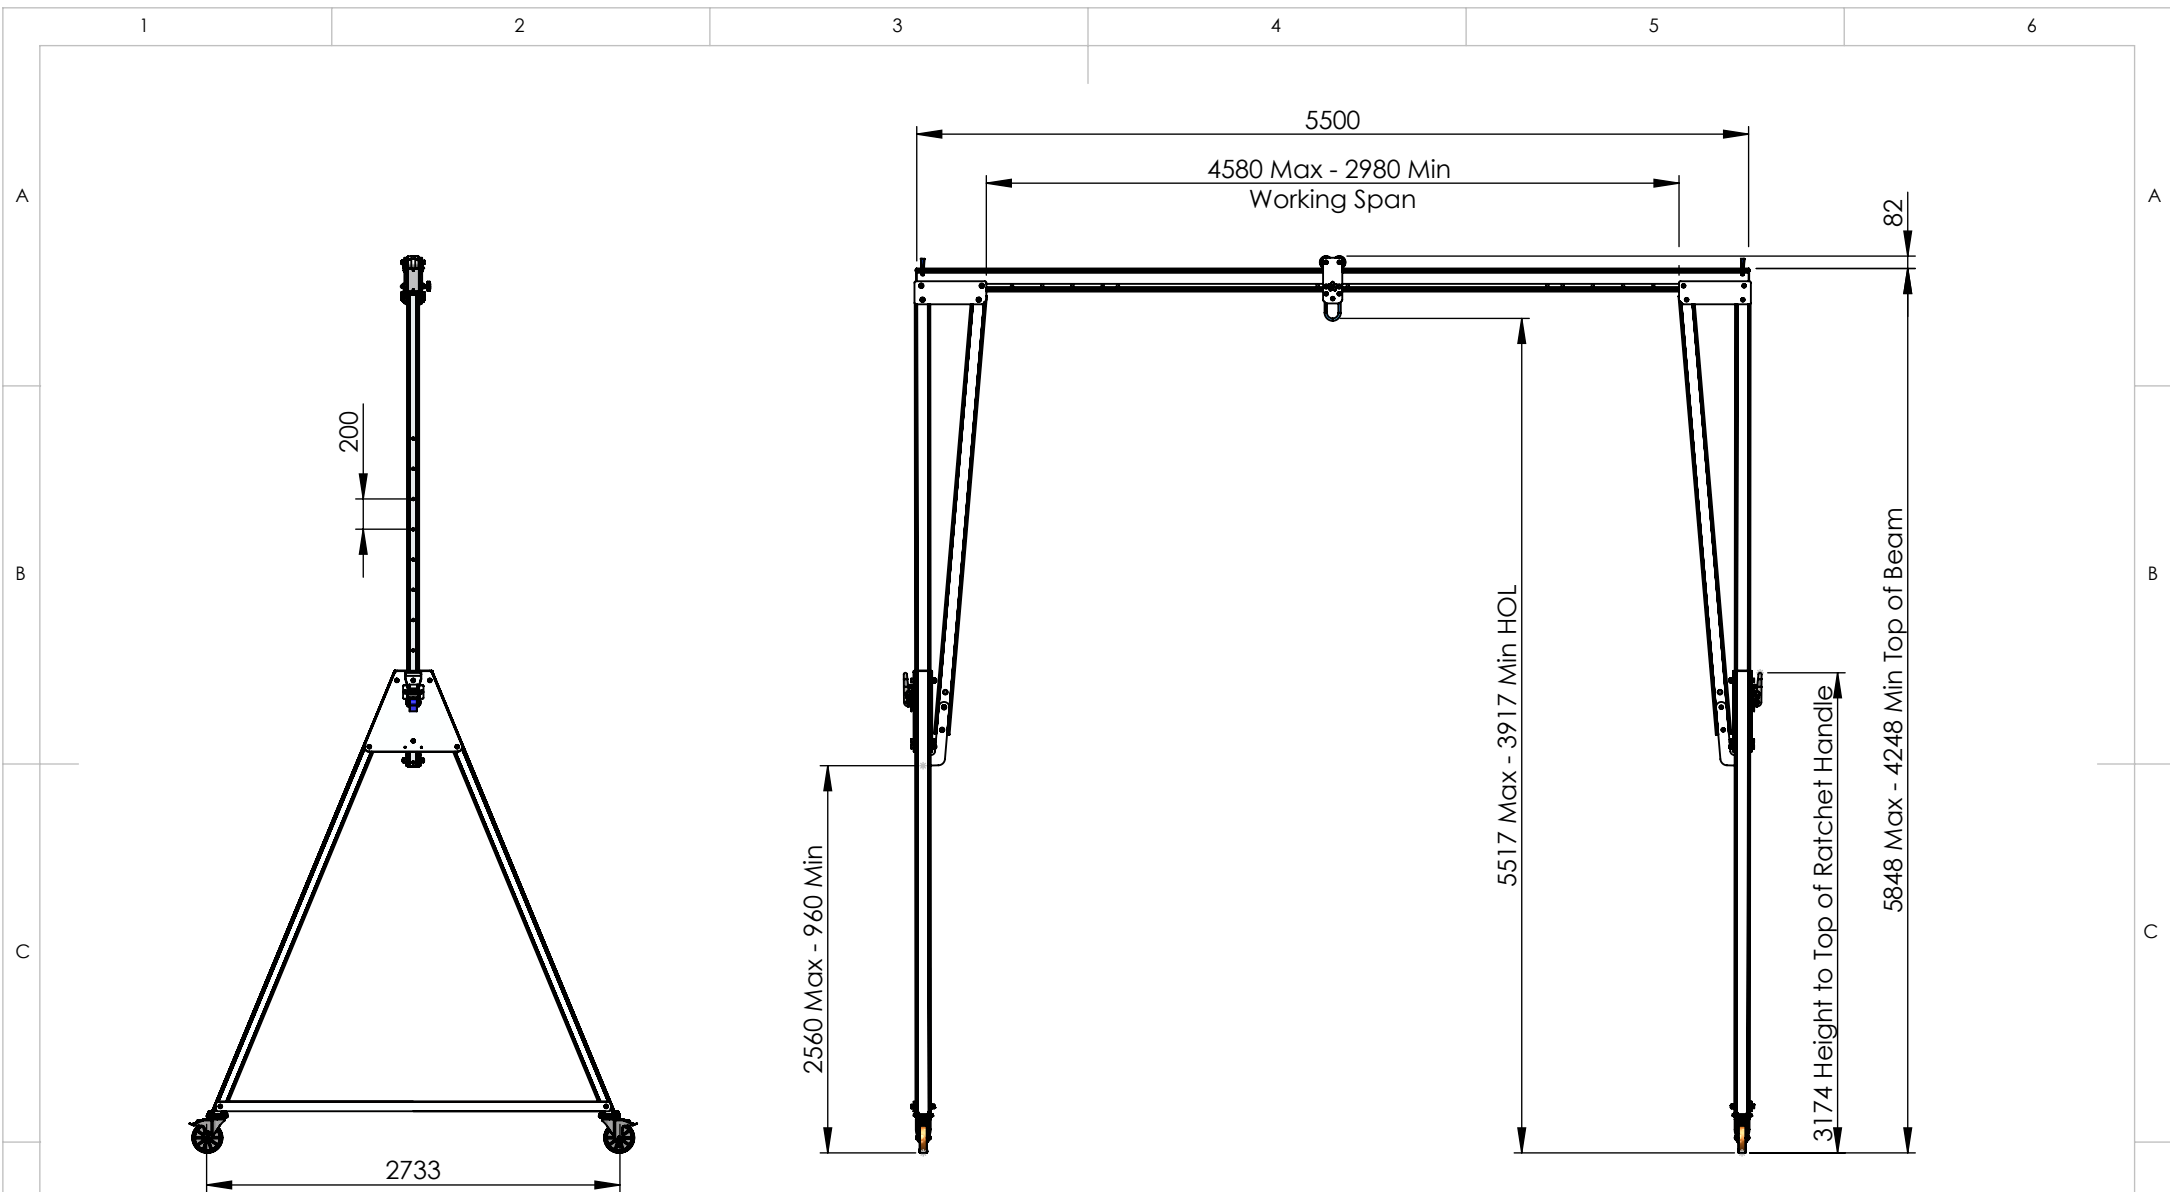

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	TB	25/05/2021	Anodised
APPV'D	CM	10/03/2023	MATERIAL:
Aluminium Alloy			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:	General Arrangement of REID Lifting Porta-Gantry Size TC2 with 5500mm Beam WLL500kg		
DWG NO.	PGSS00500TC2-5500A		A4
Estimated Weight:	234 kg	1:50	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 20-30 mm at centre of span
- Maximum castor surface pressure at full load - 13.72 MPa
- Assembled gantry weight (excluding trollies) - 234kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trollies shown in system as a reference

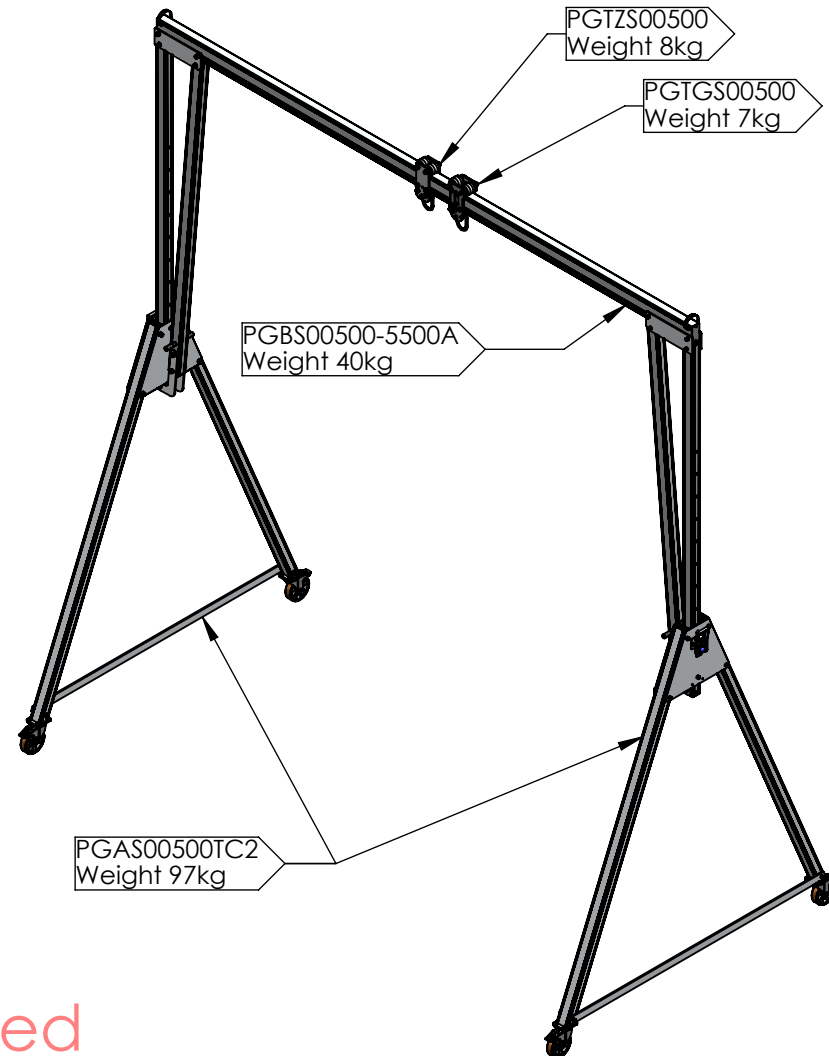

Approved

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC2 with 5500mm Beam WLL500kg**

DWG NO.


PGSS00500TC2-5500A

A4

Estimated Weight: 234 kg

1:55

SHEET 2 OF 2

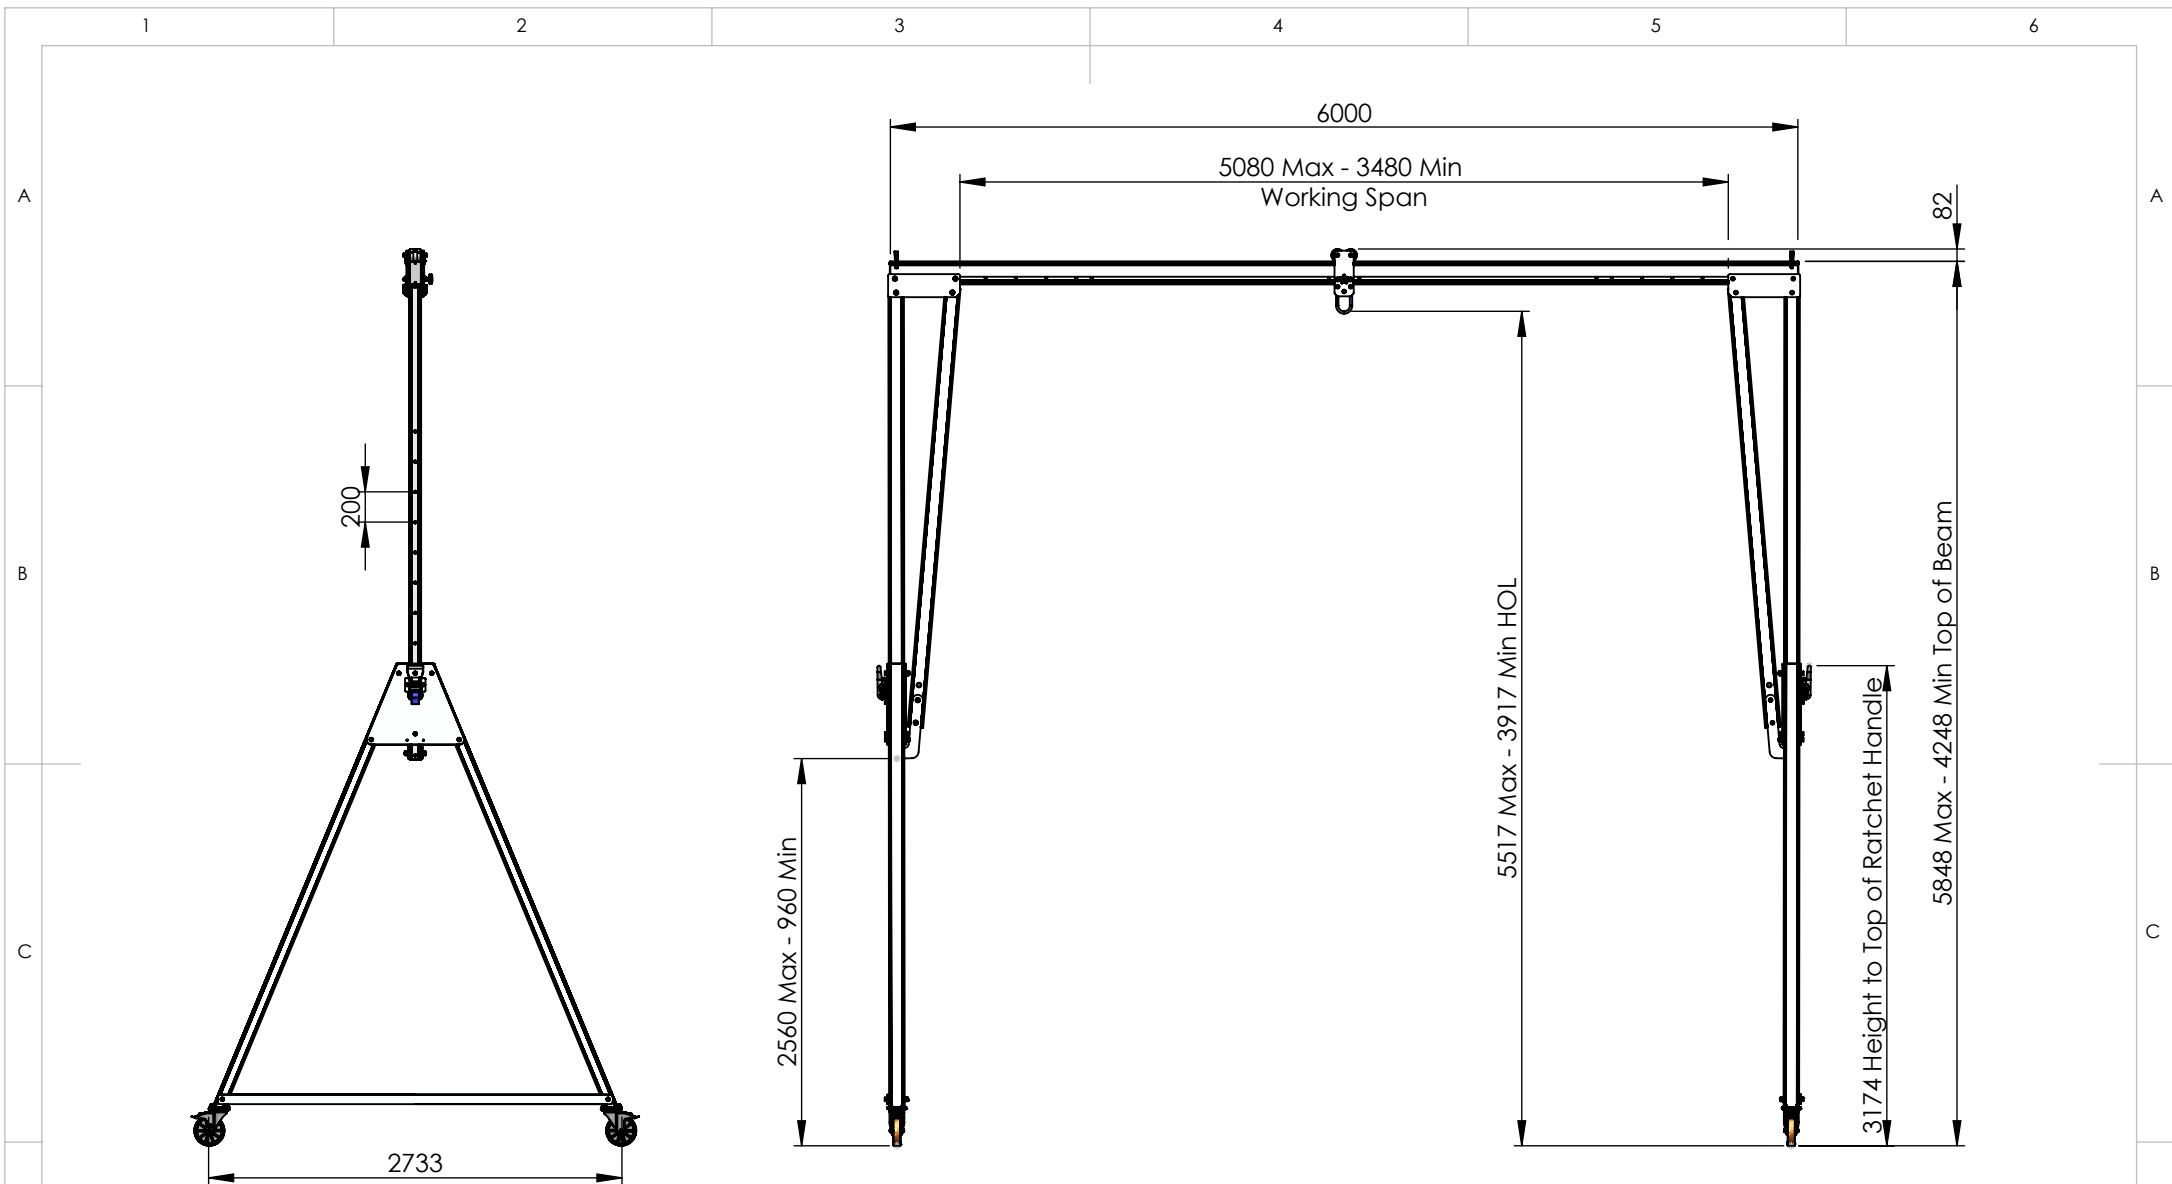

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		10/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC2 with 6000mm Beam WLL500kg	
DWG NO.	PGSS00500TC2-6000A		A4
Estimated Weight:	238 kg	1:50	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 25-35 mm at centre of span
- Maximum castor surface pressure at full load - 13.76 MPa
- Assembled gantry weight (excluding trolleys) - 238kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

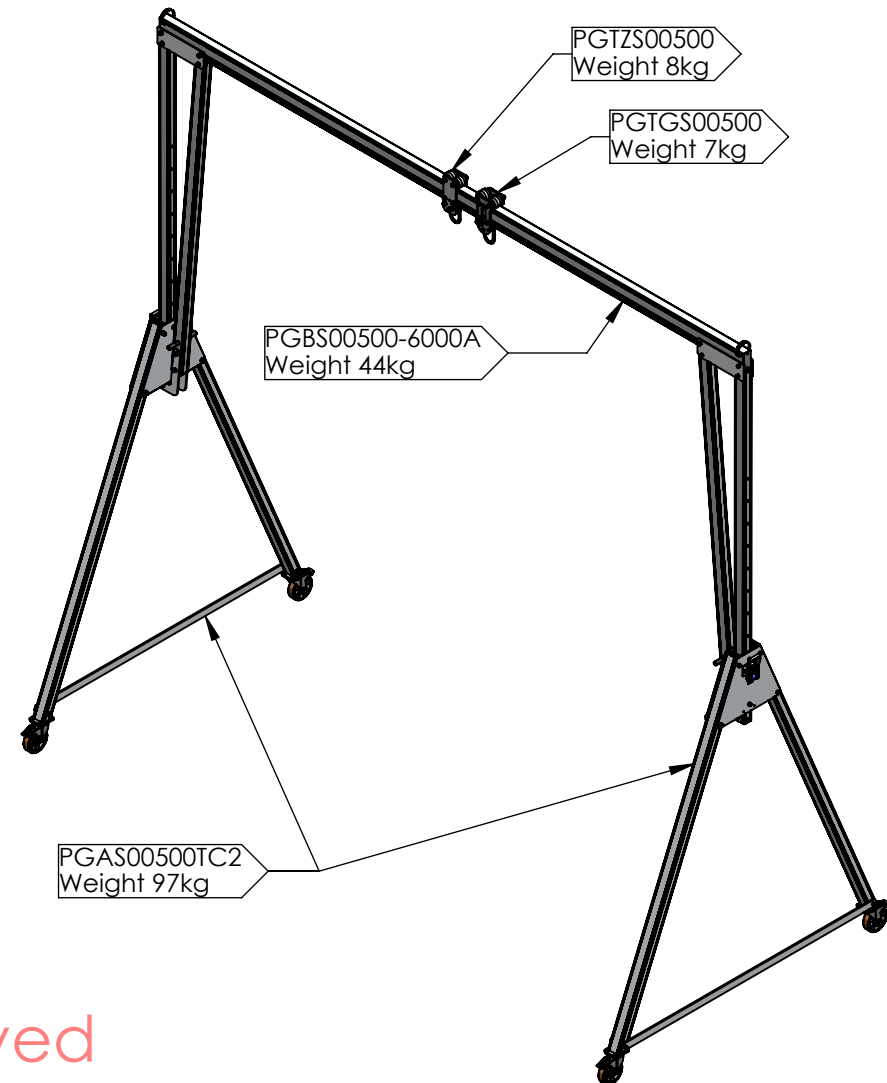

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC2 with 6000mm Beam WLL500kg**

DWG NO.


PGSS00500TC2-6000A

A4

Estimated Weight: 238 kg

1:55

SHEET 2 OF 2

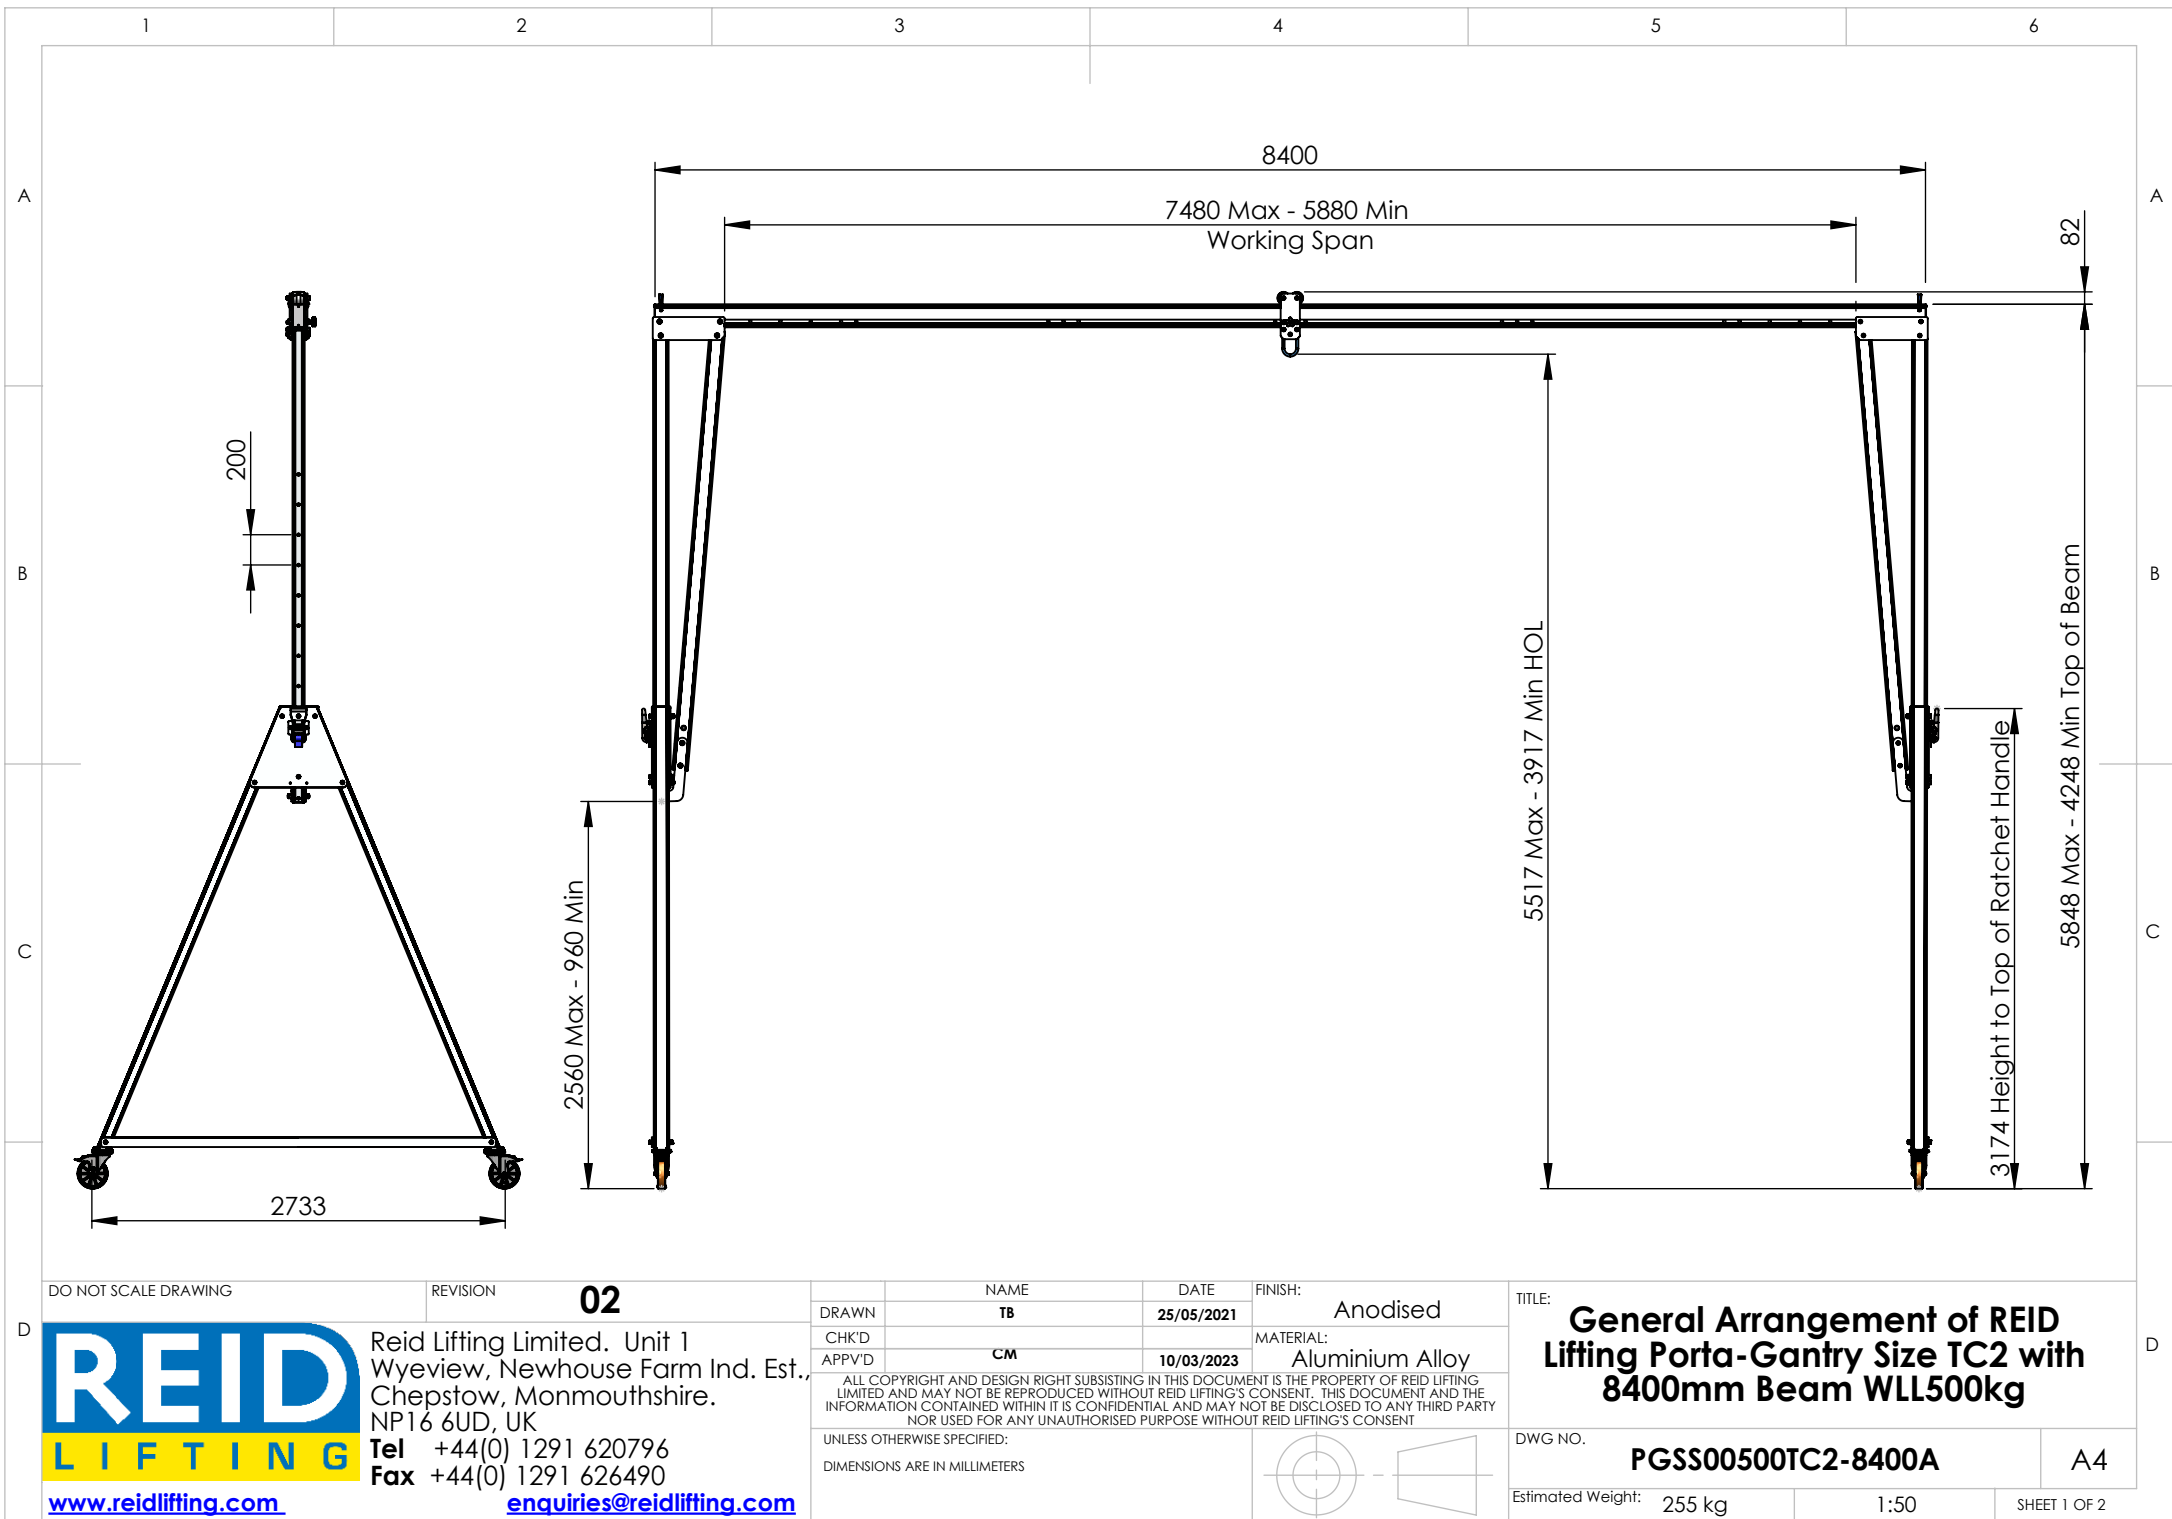

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			
CM		10/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC2 with 8400mm Beam WLL500kg	
DWG NO.		PGSS00500TC2-8400A	
Estimated Weight:		255 kg	1:50
		SHEET 1 OF 2	

A4

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 60-70 mm at centre of span
- Maximum castor surface pressure at full load - 13.95 MPa
- Assembled gantry weight (excluding trollies) - 256kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

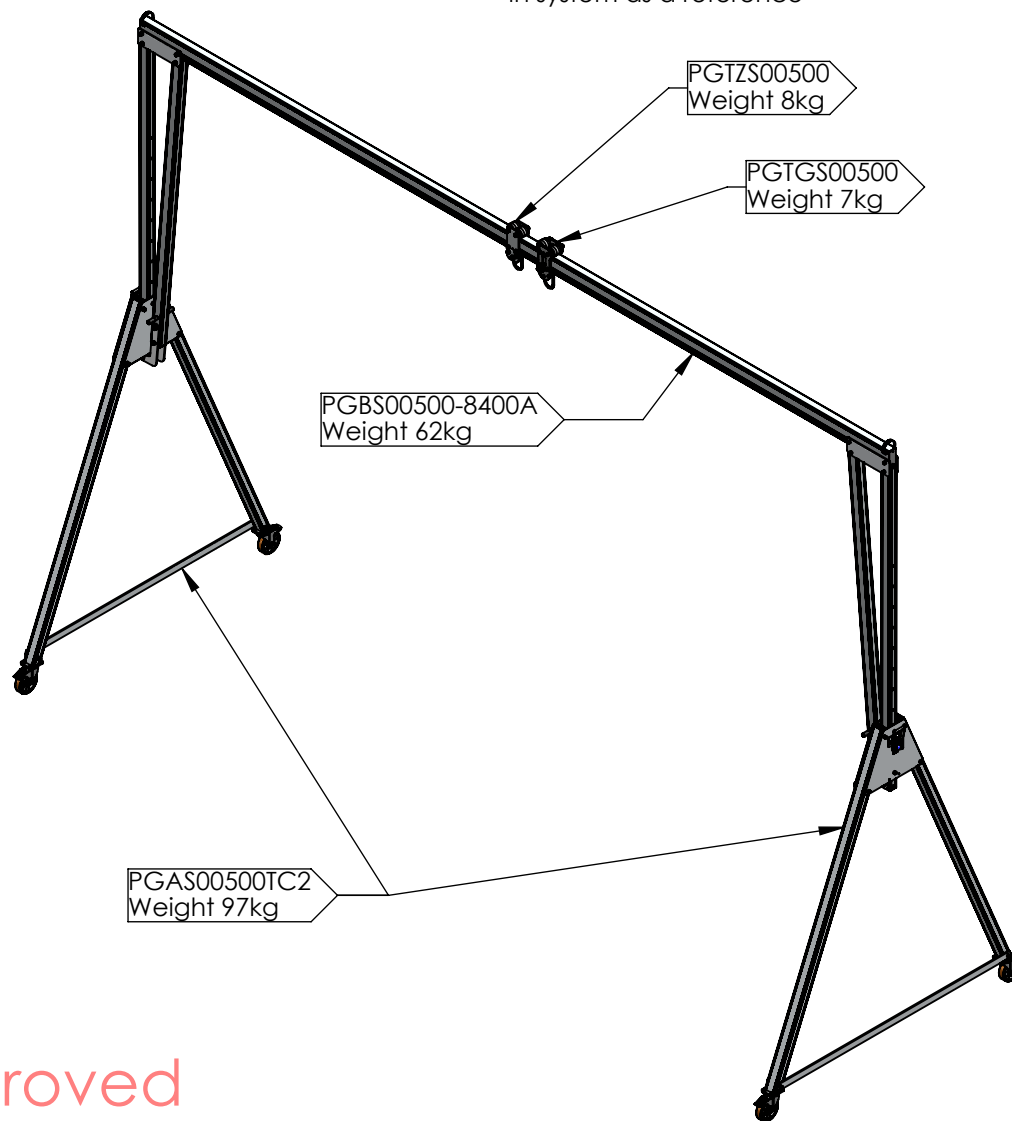

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC2 with 8400mm Beam WLL500kg**

DWG NO.


PGSS00500TC2-8400A

A4

Estimated Weight: 255 kg

1:60

SHEET 2 OF 2

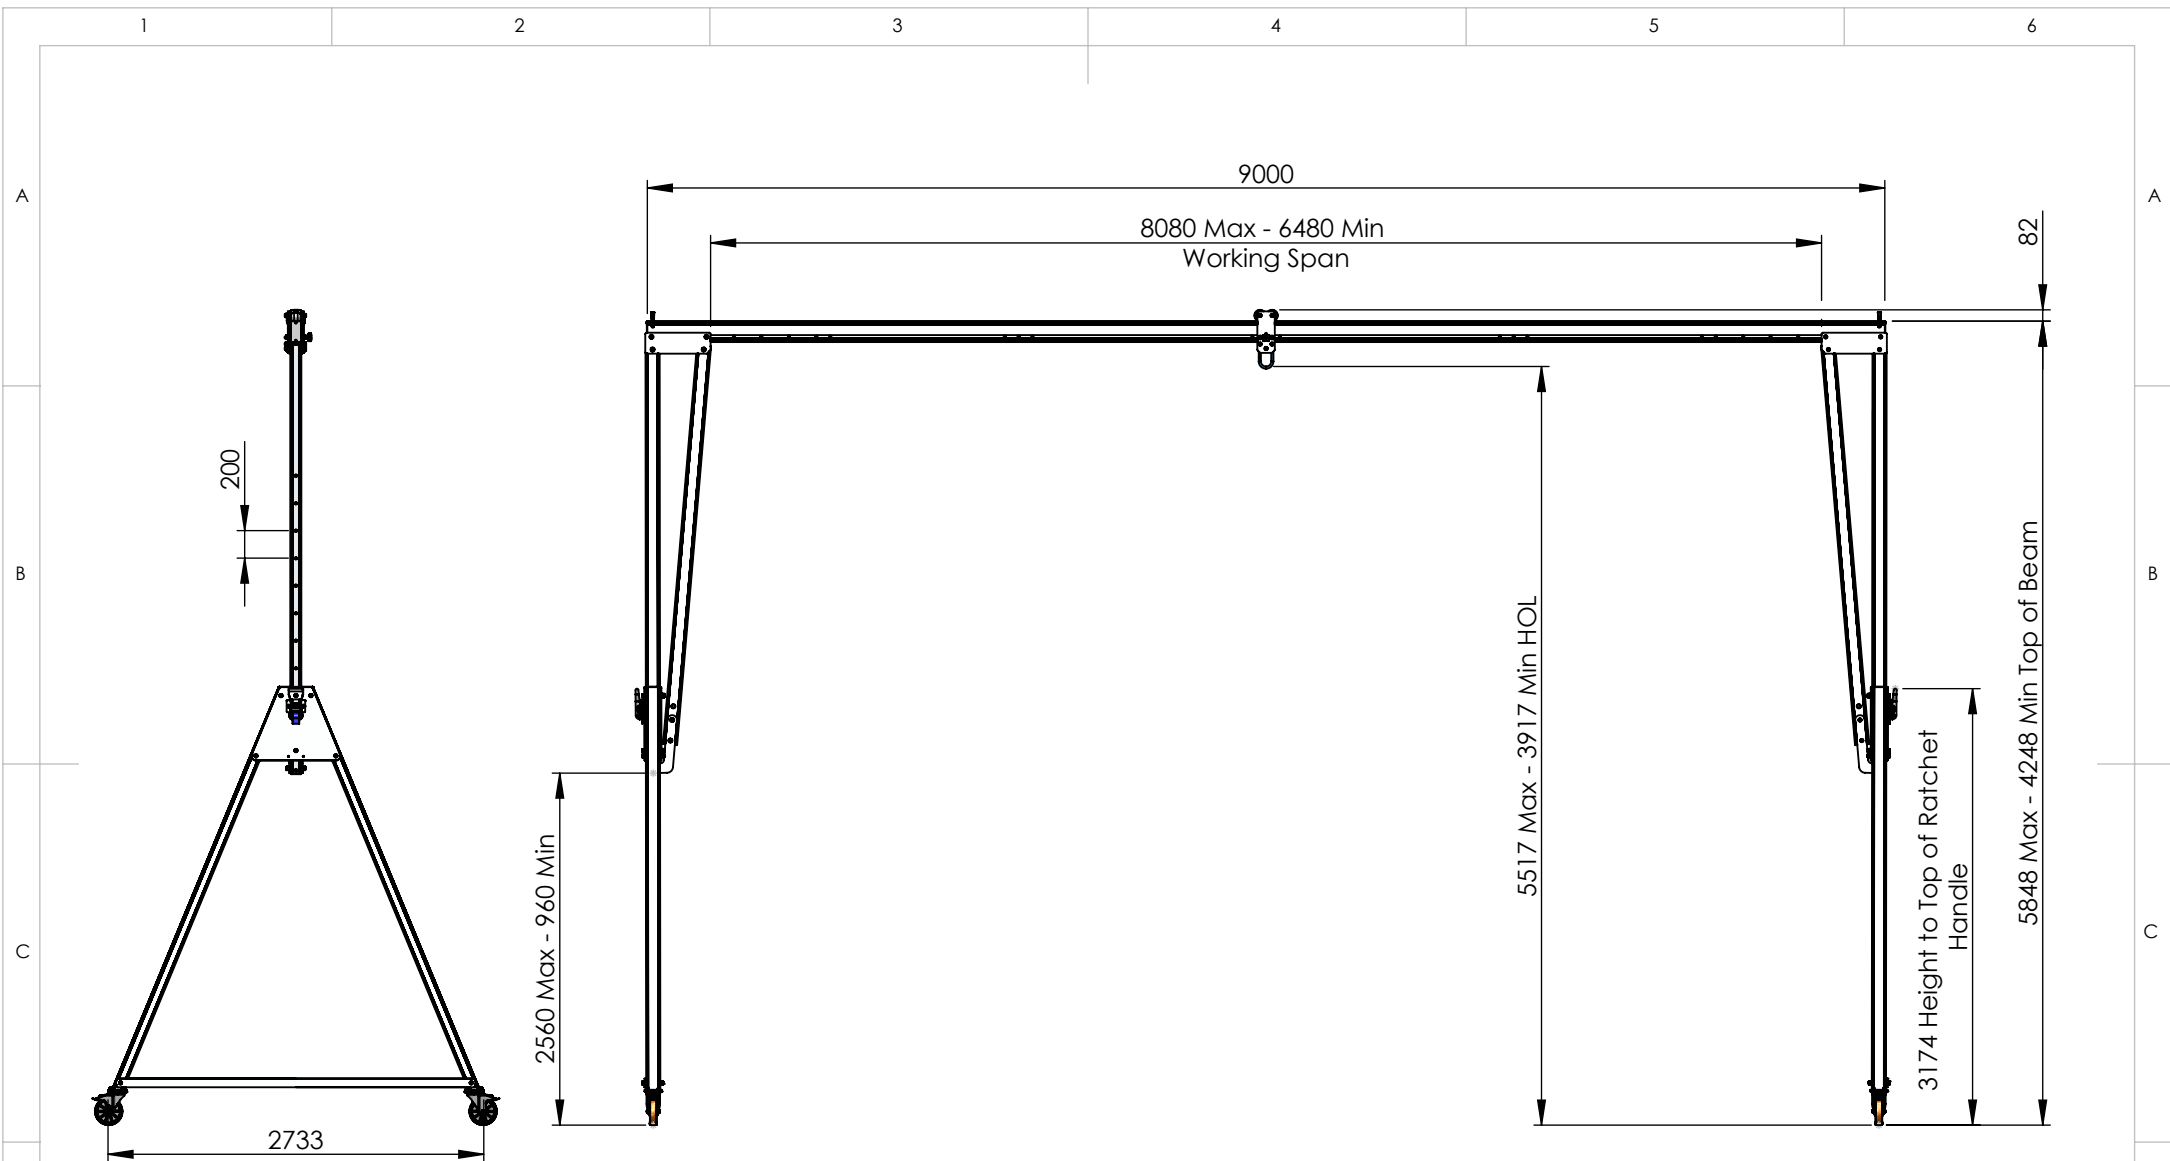

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		25/05/2021	Anodised
CHK'D			MATERIAL:
CM		10/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC2 with
9000mm Beam WLL500kg**

DWG NO.

PGSS00500TC2-9000A

A4

Estimated Weight: 260 kg

1:55

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 80-90 mm at centre of span
- Maximum castor surface pressure at full load - 14.00 MPa
- Assembled gantry weight (excluding trolleys) - 260kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Nylon & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

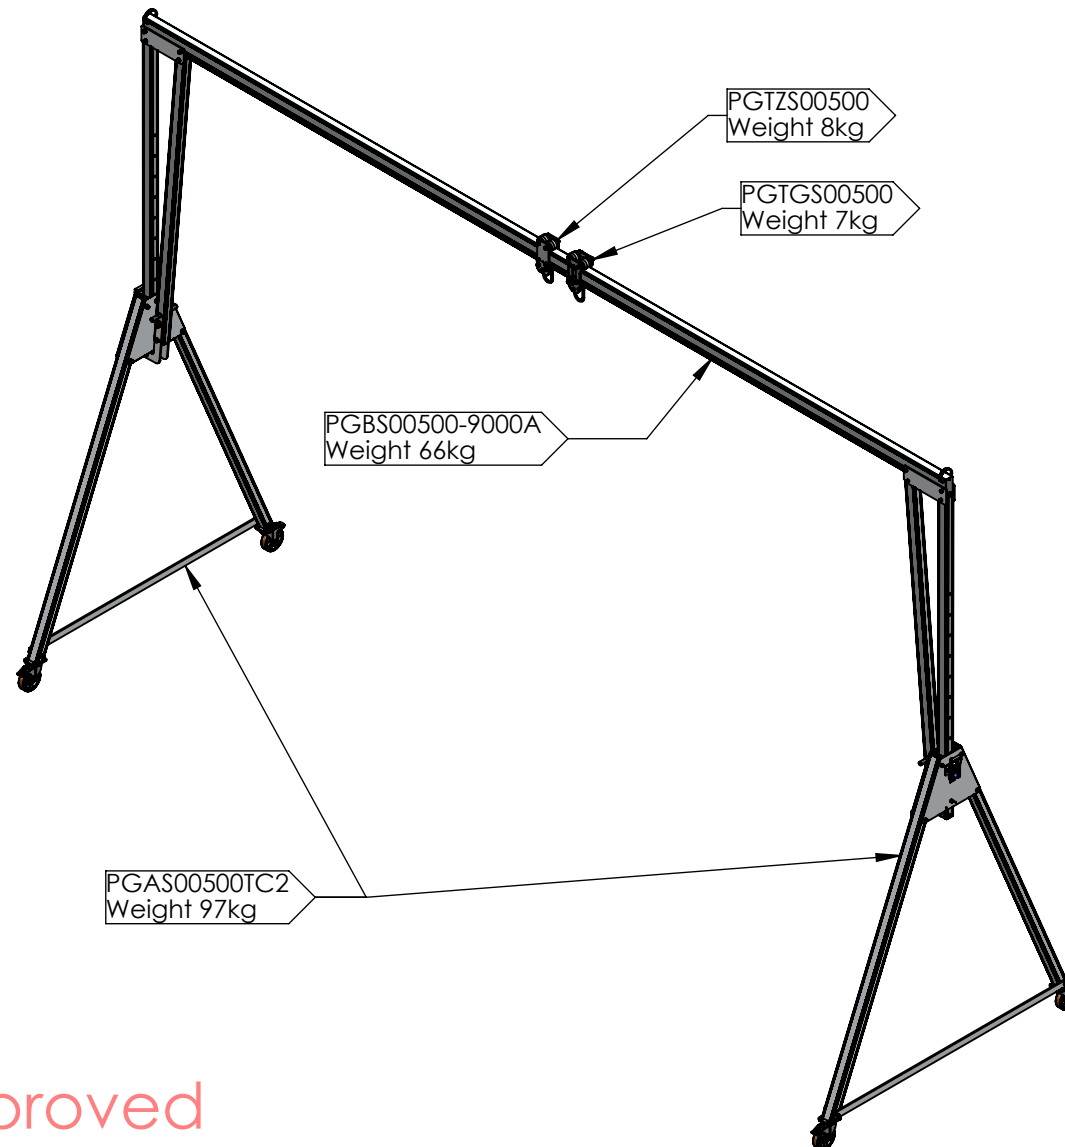

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	25/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC2 with 9000mm Beam WLL500kg**

DWG NO.

PGSS00500TC2-9000A

A4



Estimated Weight: 260 kg

1:60

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between castors on the A-frame

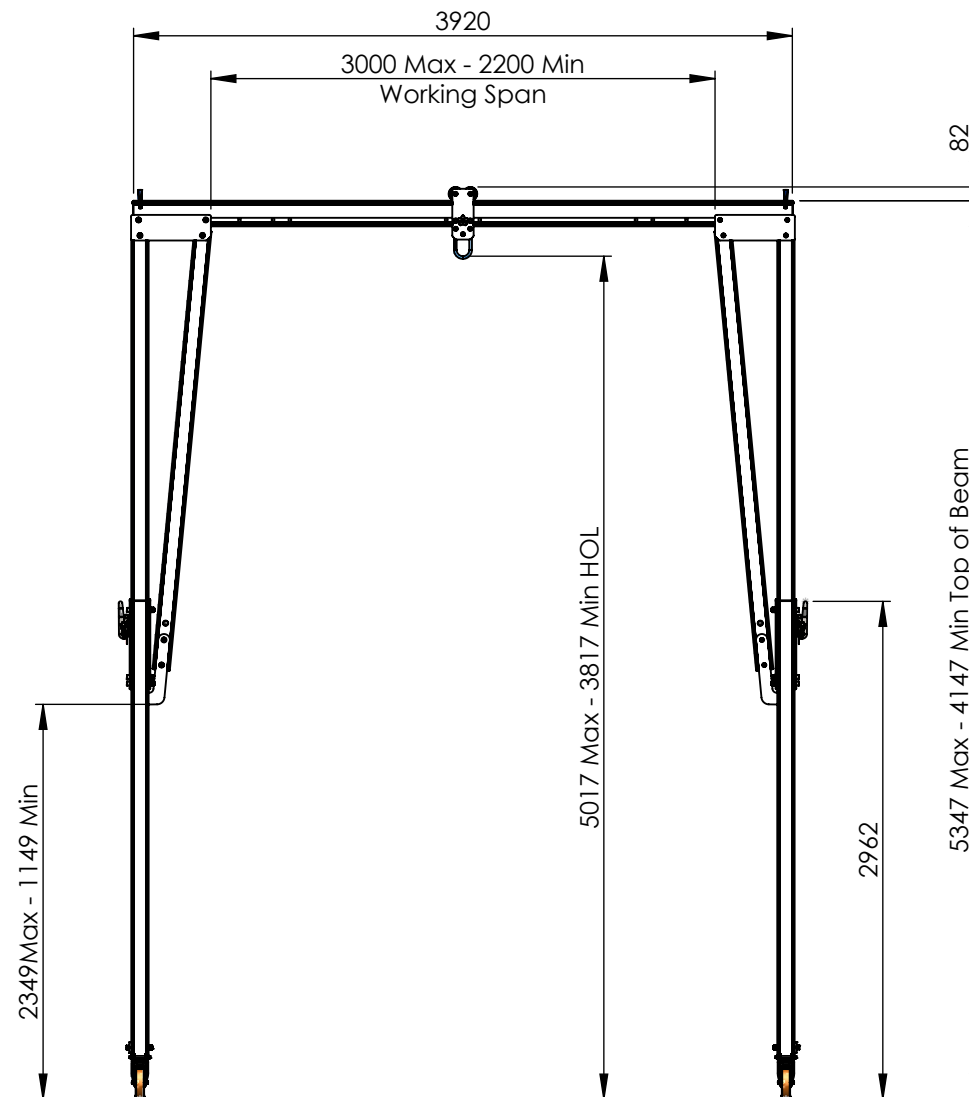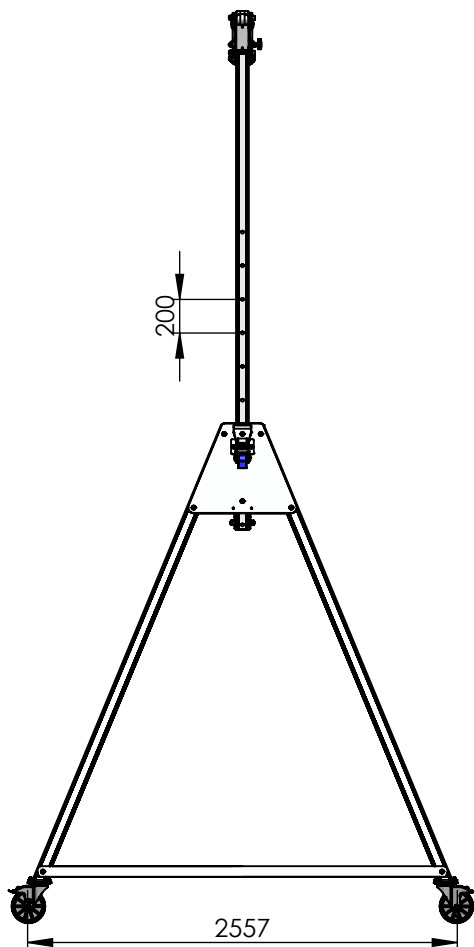

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	BJ	18/11/2020	Anodised
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size TC3
3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC3-3920A

A4

Estimated Weight: 211kg

1:45

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 5-10 mm at centre of span
- Maximum castor surface pressure at full load - 13.46 MPa
- Assembled gantry weight (excluding trolleys) - 211kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

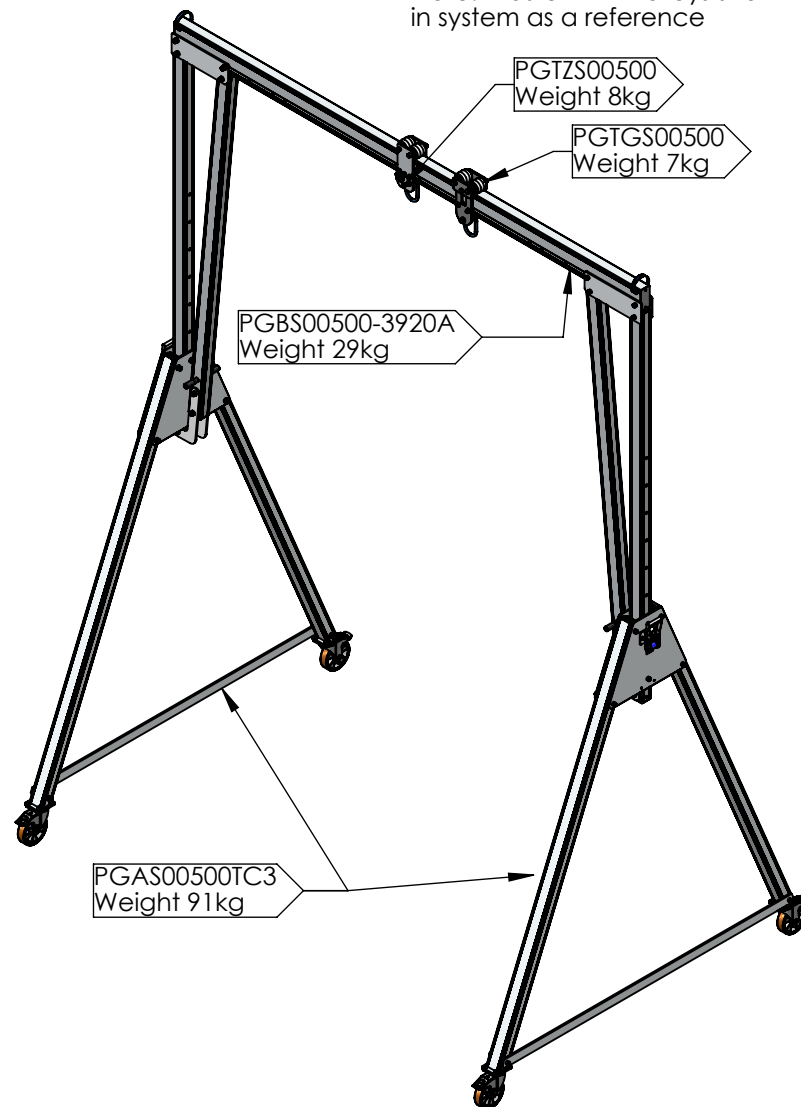

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	18/11/2020
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC3 3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC3-3920A

A4



Estimated Weight: 211kg

1:45

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-frame

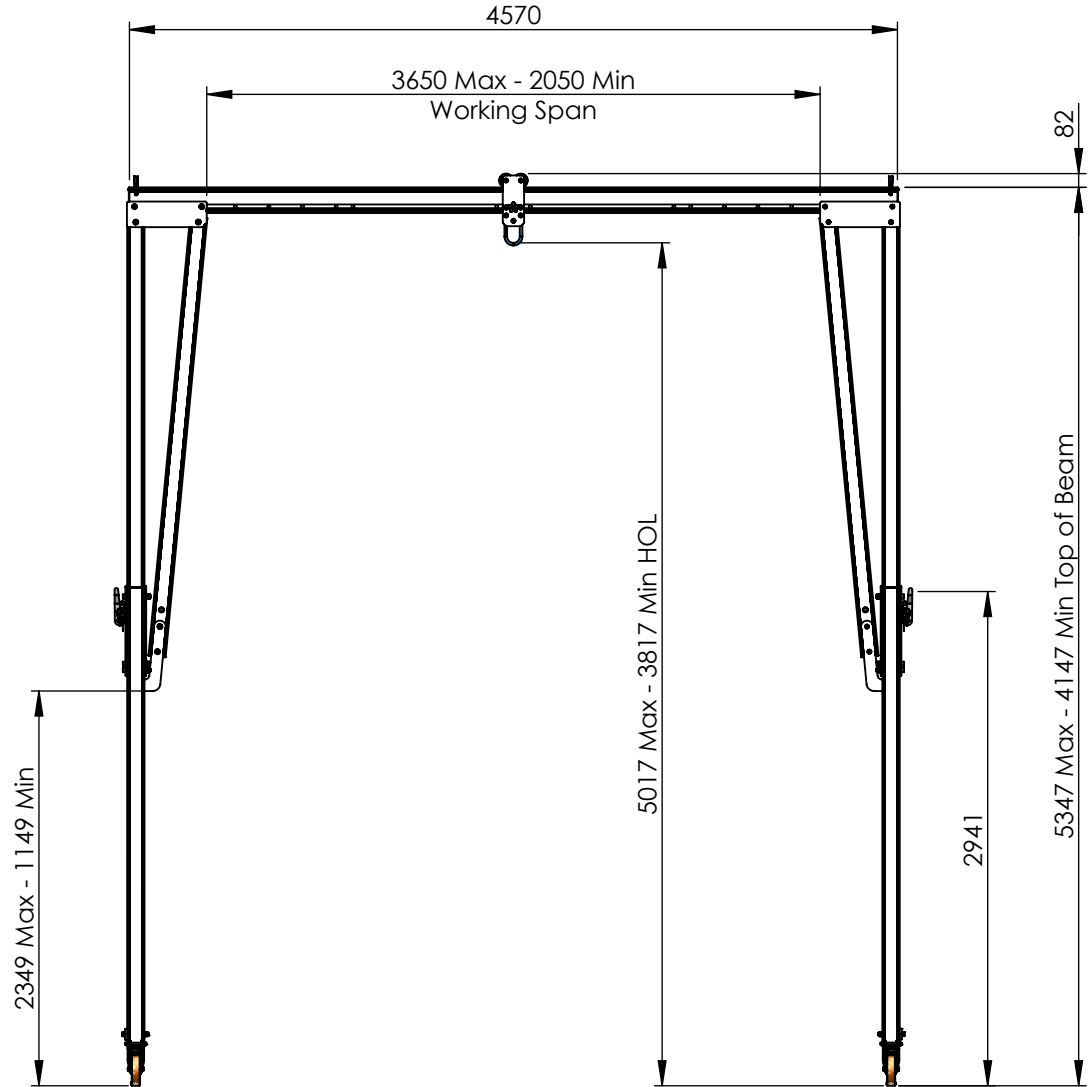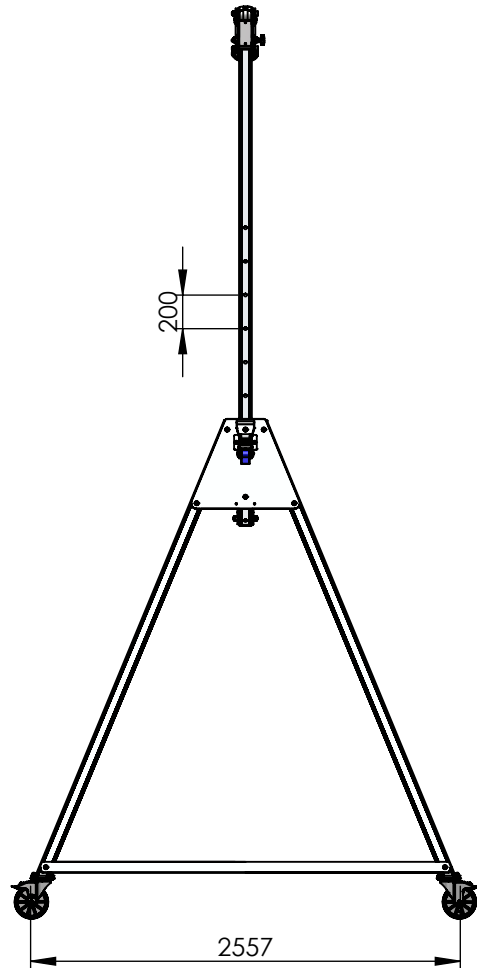

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796

Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	BJ	10/12/2020	Anodised
CHK'D			
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE: **General Arrangement of REID
Lifting Porta-Gantry Size TC3
4570mm Beam WLL500kg**

DWG NO.

PGSS00500TC3-4570A

A4

Estimated Weight: 215kg

1:45

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 10-15 mm at centre of span
- Maximum castor surface pressure at full load - 13.51 MPa
- Assembled gantry weight (excluding trolleys) - 215kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

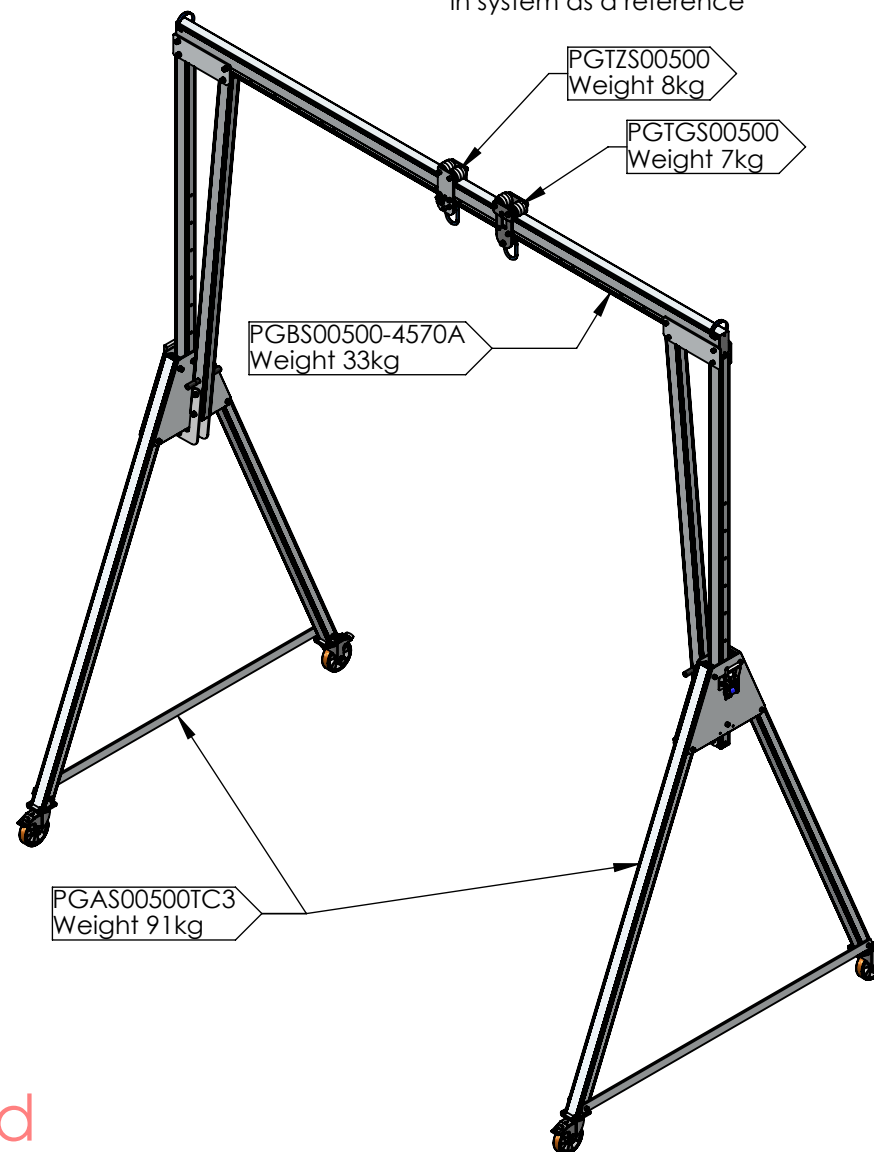

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	10/12/2020
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC3 4570mm Beam WLL500kg**

DWG NO.


PGSS00500TC3-4570A

A4

Estimated Weight: 215kg

1:45

SHEET 2 OF 2

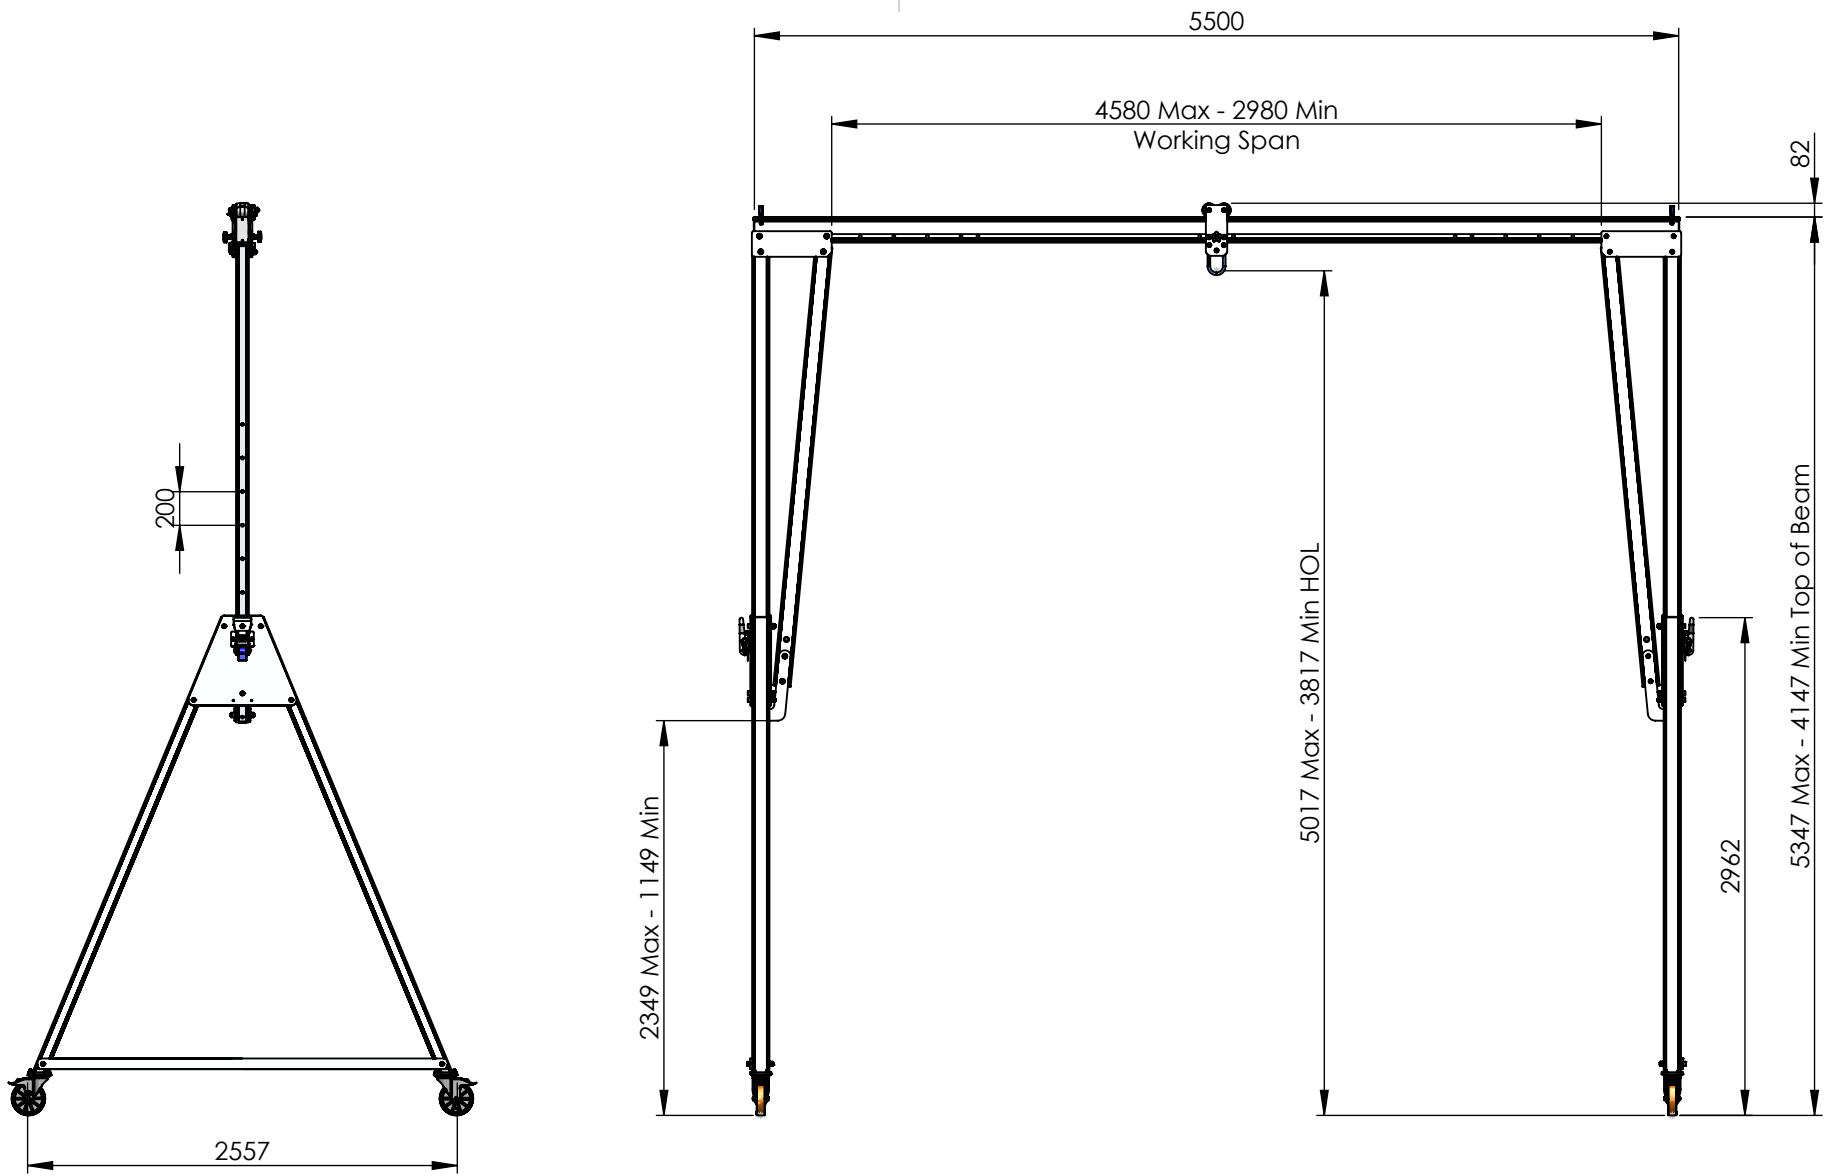

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	07/06/2021	Anodised
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC3 - 5500mm Beam WLL500kg	
DWG NO.	PGSS00500TC3-5500A	A4	
Estimated Weight:	222kg	1:45	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 20-30mm at centre of span
- Maximum castor surface pressure at full load - 13.59 MPa
- Assembled gantry weight (excluding trolleys) - 222kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

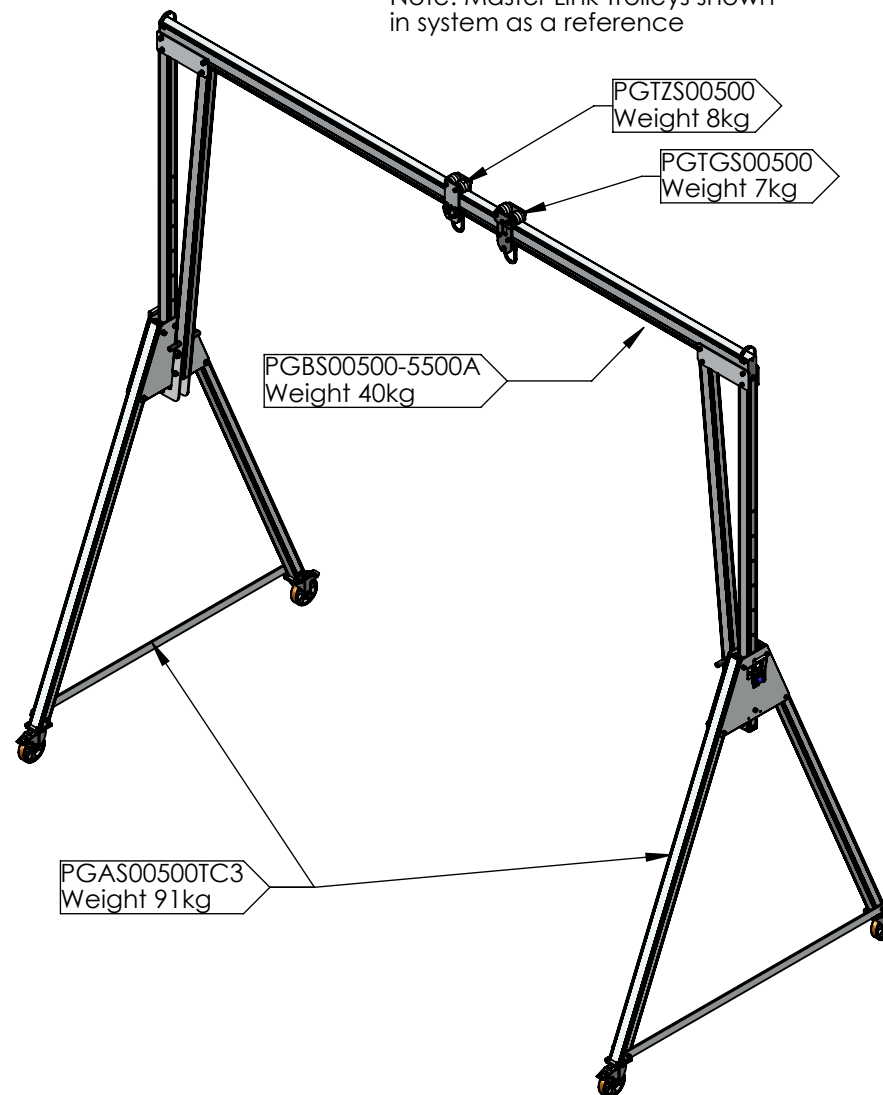

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	07/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC3 -
5500mm Beam WLL500kg**

DWG NO.


PGSS00500TC3-5500A

A4

Estimated Weight: 222kg

1:50

SHEET 2 OF 2

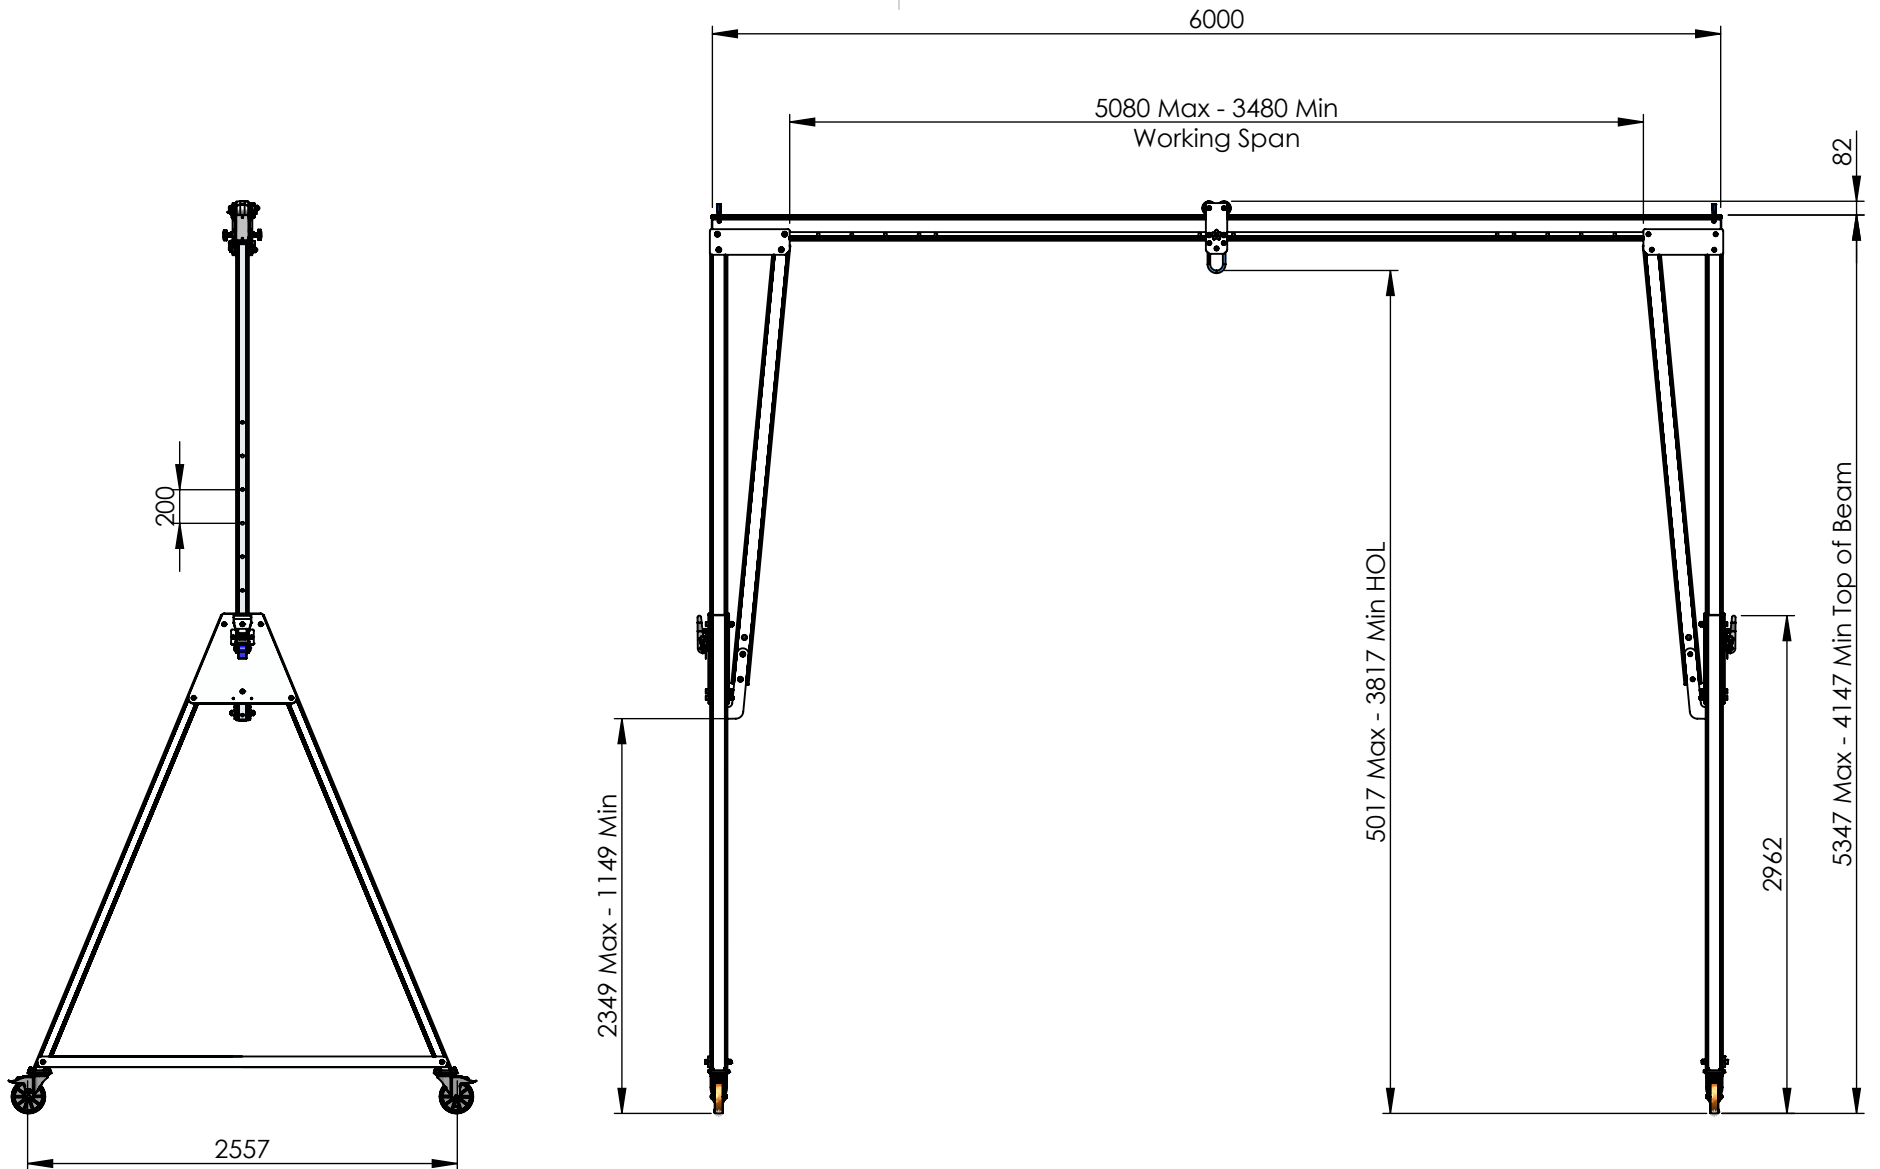

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	07/06/2021	Anodised
APP'V'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:	General Arrangement of REID Lifting Porta-Gantry Size TC3 - 6000mm Beam WLL500kg		
DWG NO.	PGSS00500TC3-6000A	A4	
Estimated Weight:	226kg	1:45	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 25-35mm at centre of span
- Maximum castor surface pressure at full load - 13.63 MPa
- Assembled gantry weight (excluding trolleys) - 226kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

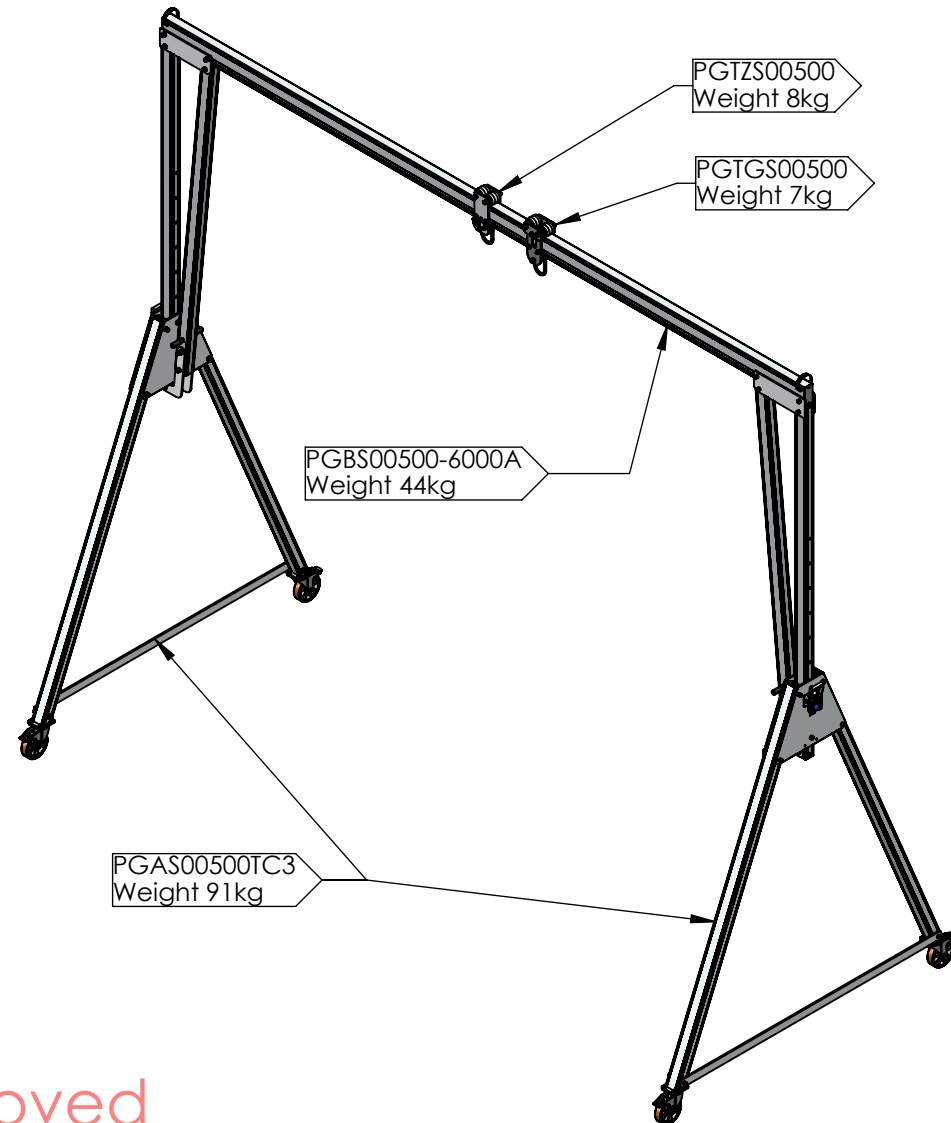

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	07/06/2021
CHK'D		
APP'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC3 -
6000mm Beam WLL500kg**

DWG NO.


PGSS00500TC3-6000A

A4

Estimated Weight: 226kg

1:50

SHEET 2 OF 2

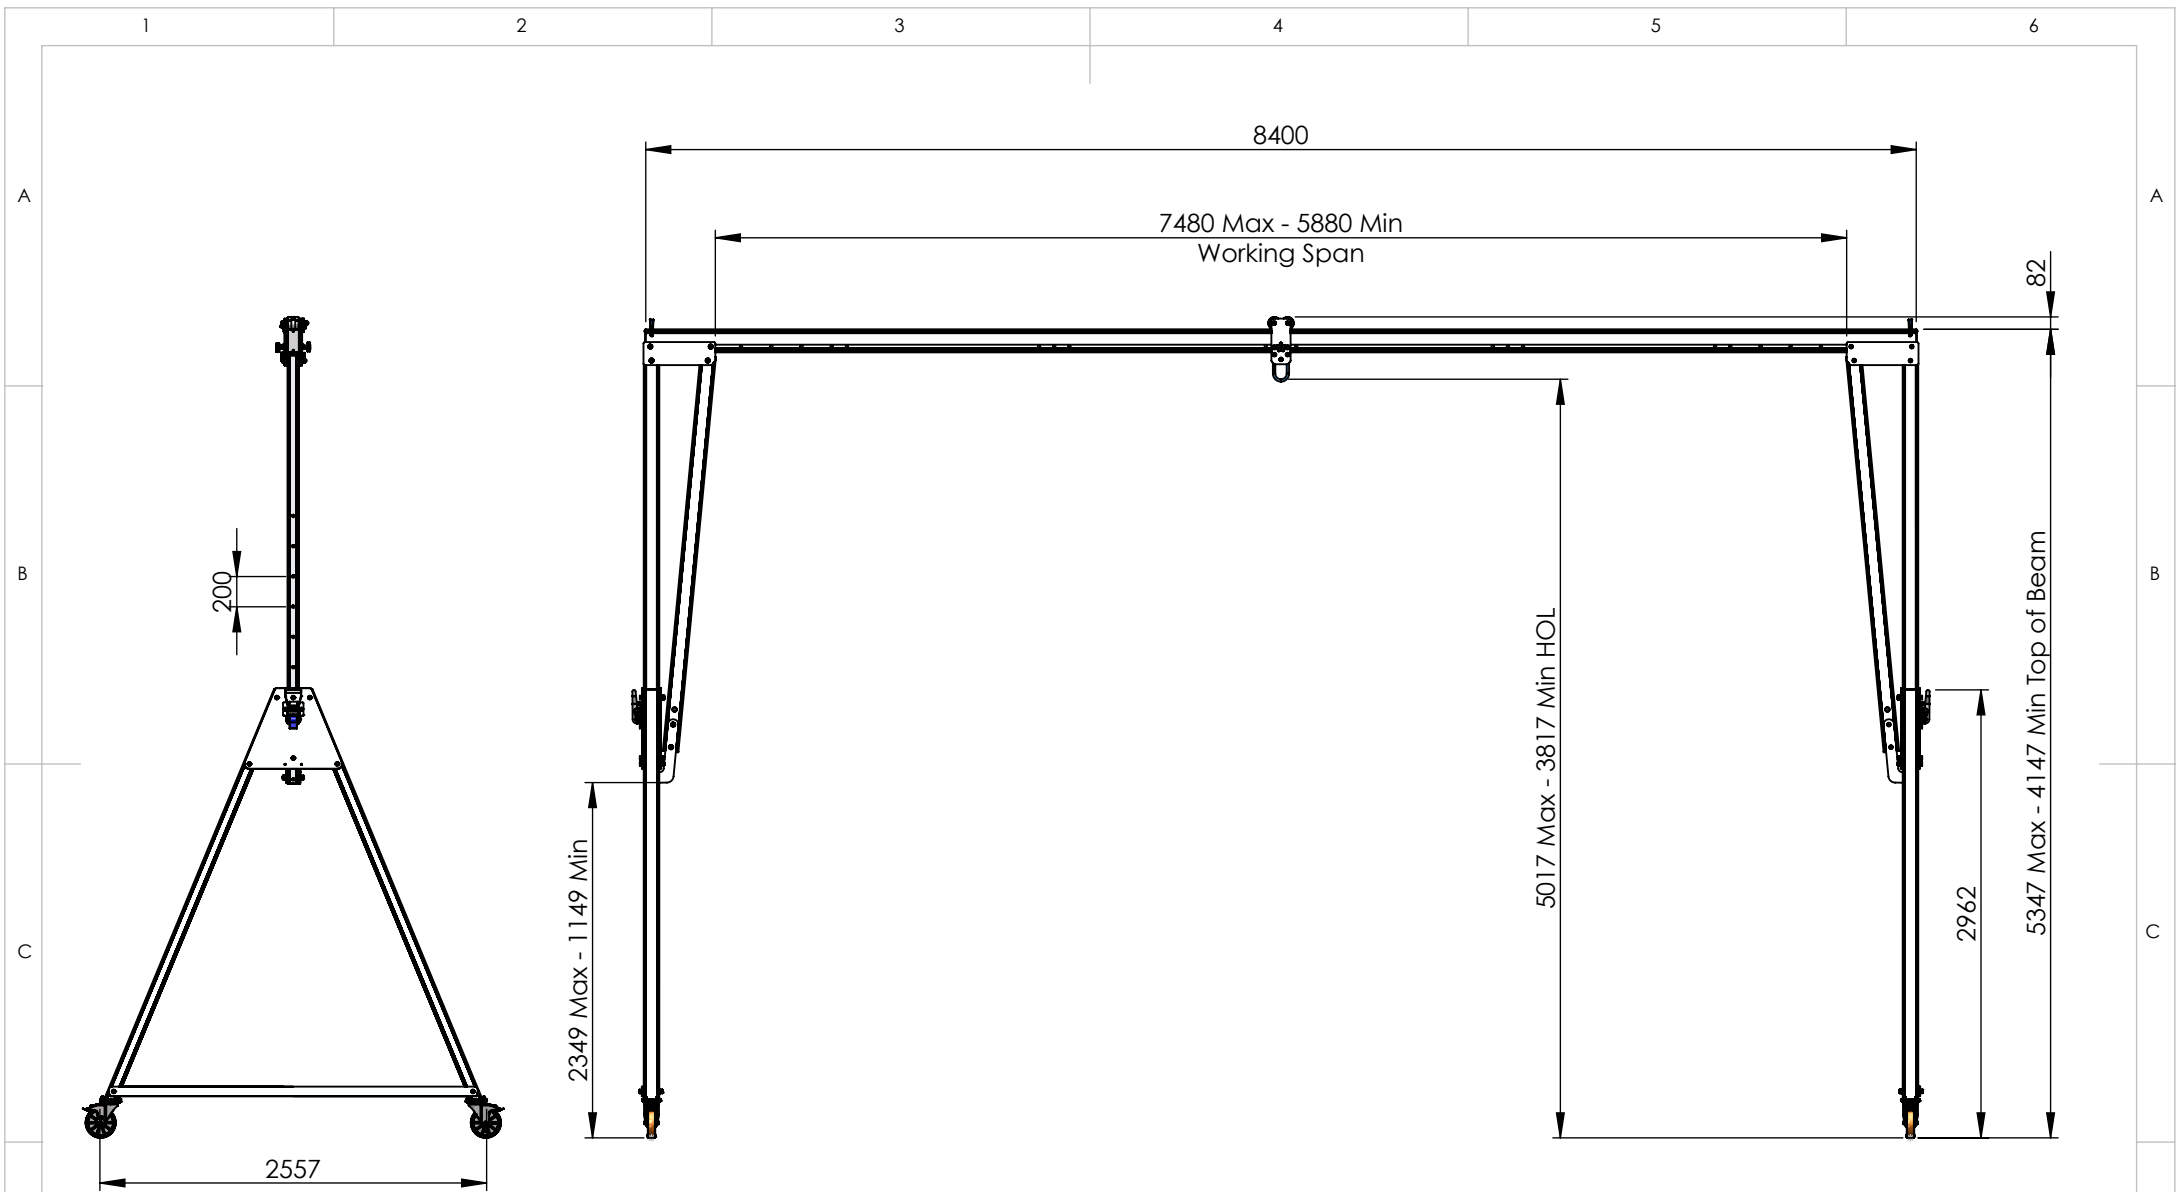

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
CHK'D	SS	07/06/2021	Anodised
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC3 -
8400mm Beam WLL500kg**

DWG NO.

PGSS00500TC3-8400A

A4

Estimated Weight: 243kg

1:50

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 60-70mm at centre of span
- Maximum castor surface pressure at full load - 13.82 MPa
- Assembled gantry weight (excluding trolleys) - 243kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolles shown in system as a reference

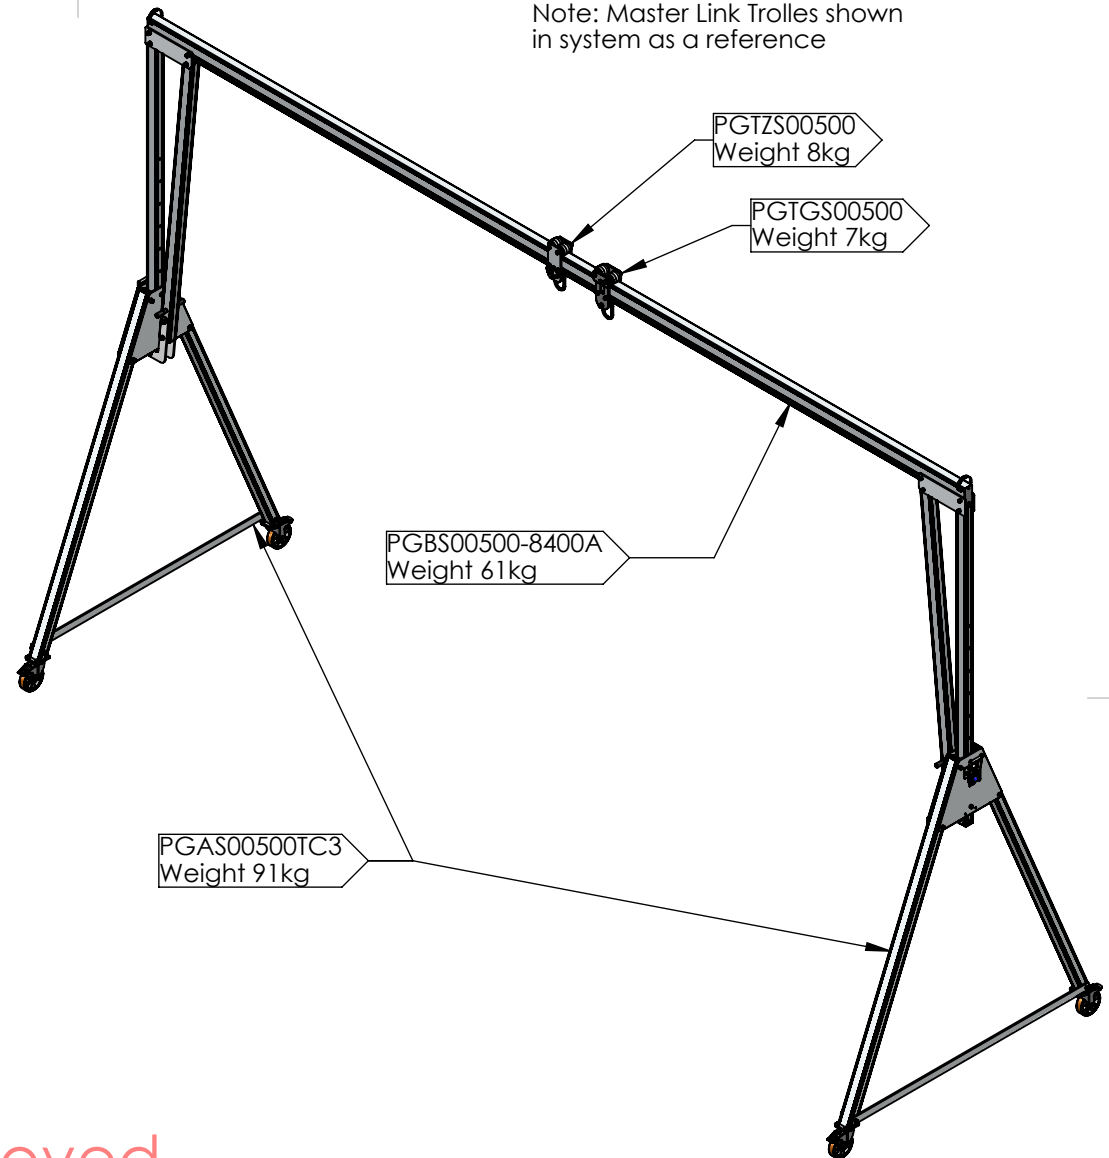

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	07/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC3 -
8400mm Beam WLL500kg**

DWG NO.


PGSS00500TC3-8400A

A4

Estimated Weight: 243kg

1:55

SHEET 2 OF 2

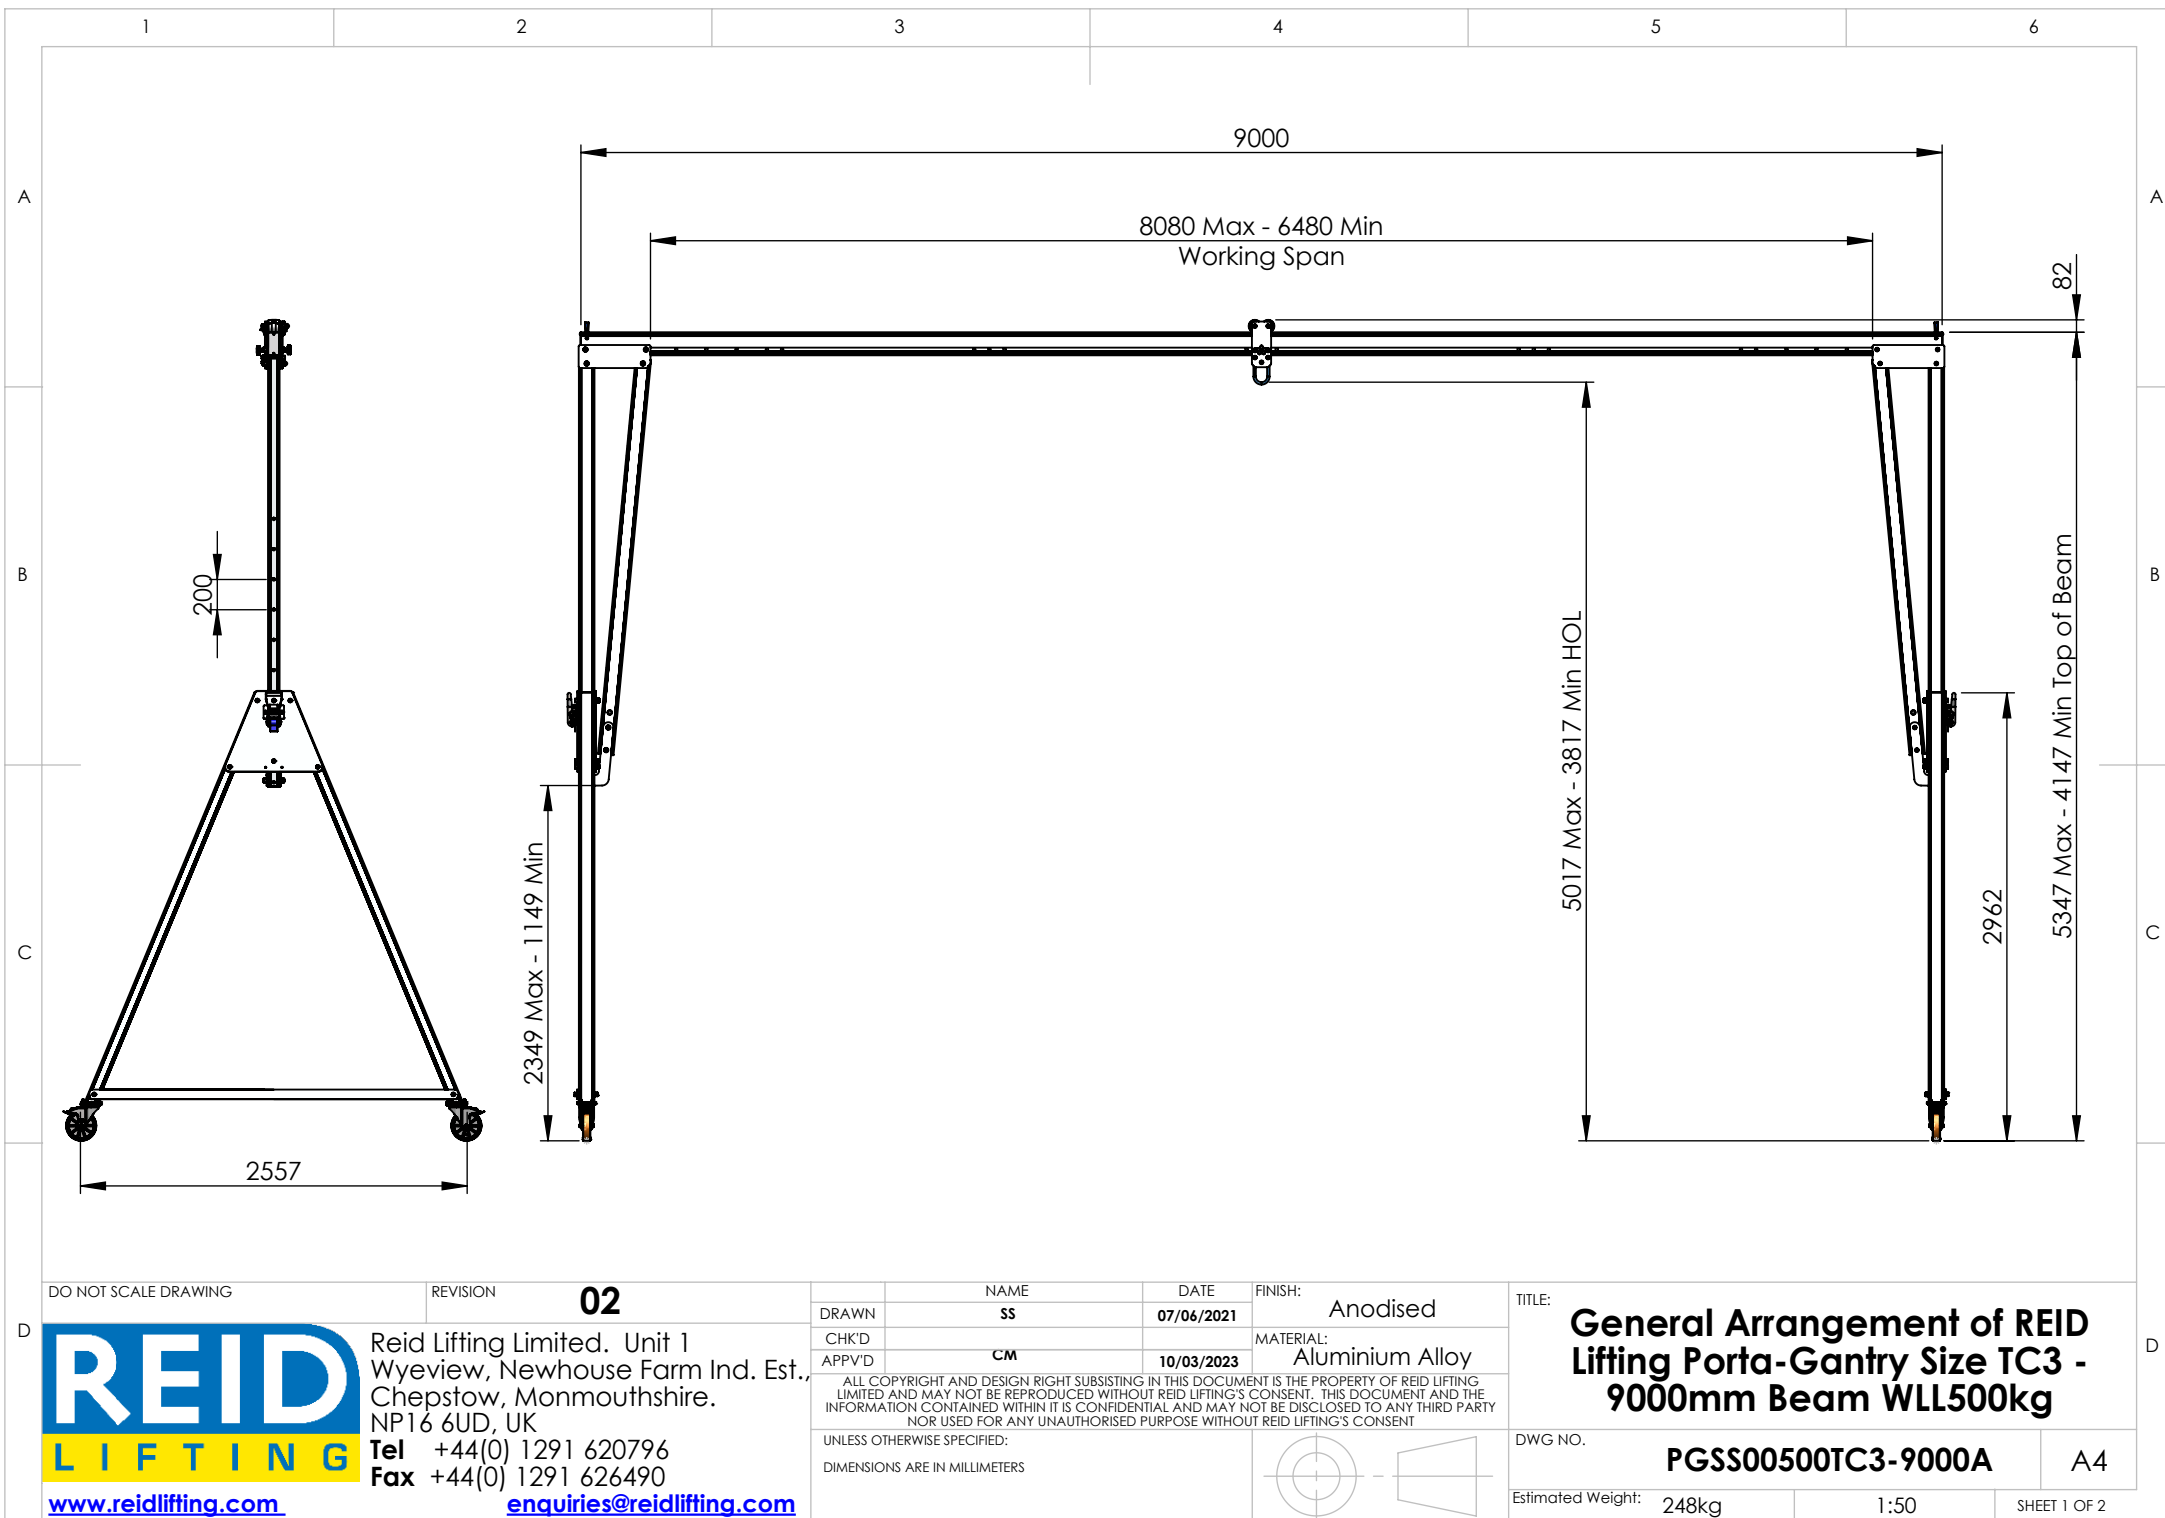

General Specification


- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - between 80-90mm at centre of span
- Maximum castor surface pressure at full load - 13.87 MPa
- Assembled gantry weight (excluding trolleys) - 248kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

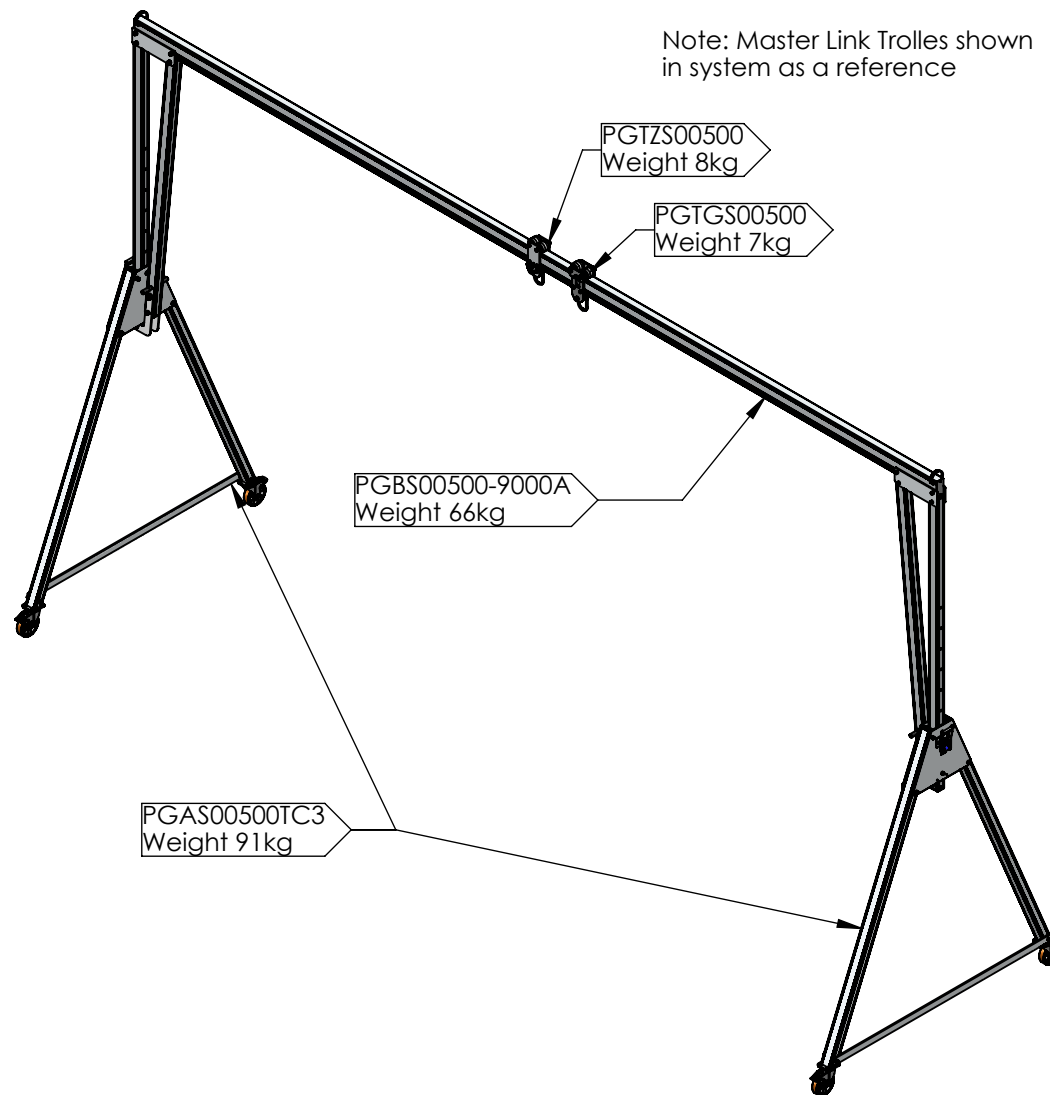

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	SS	07/06/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC3 -
9000mm Beam WLL500kg**

DWG NO.

PGSS00500TC3-9000A

A4


Estimated Weight: 248kg

1:60

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between castors on the A-frame

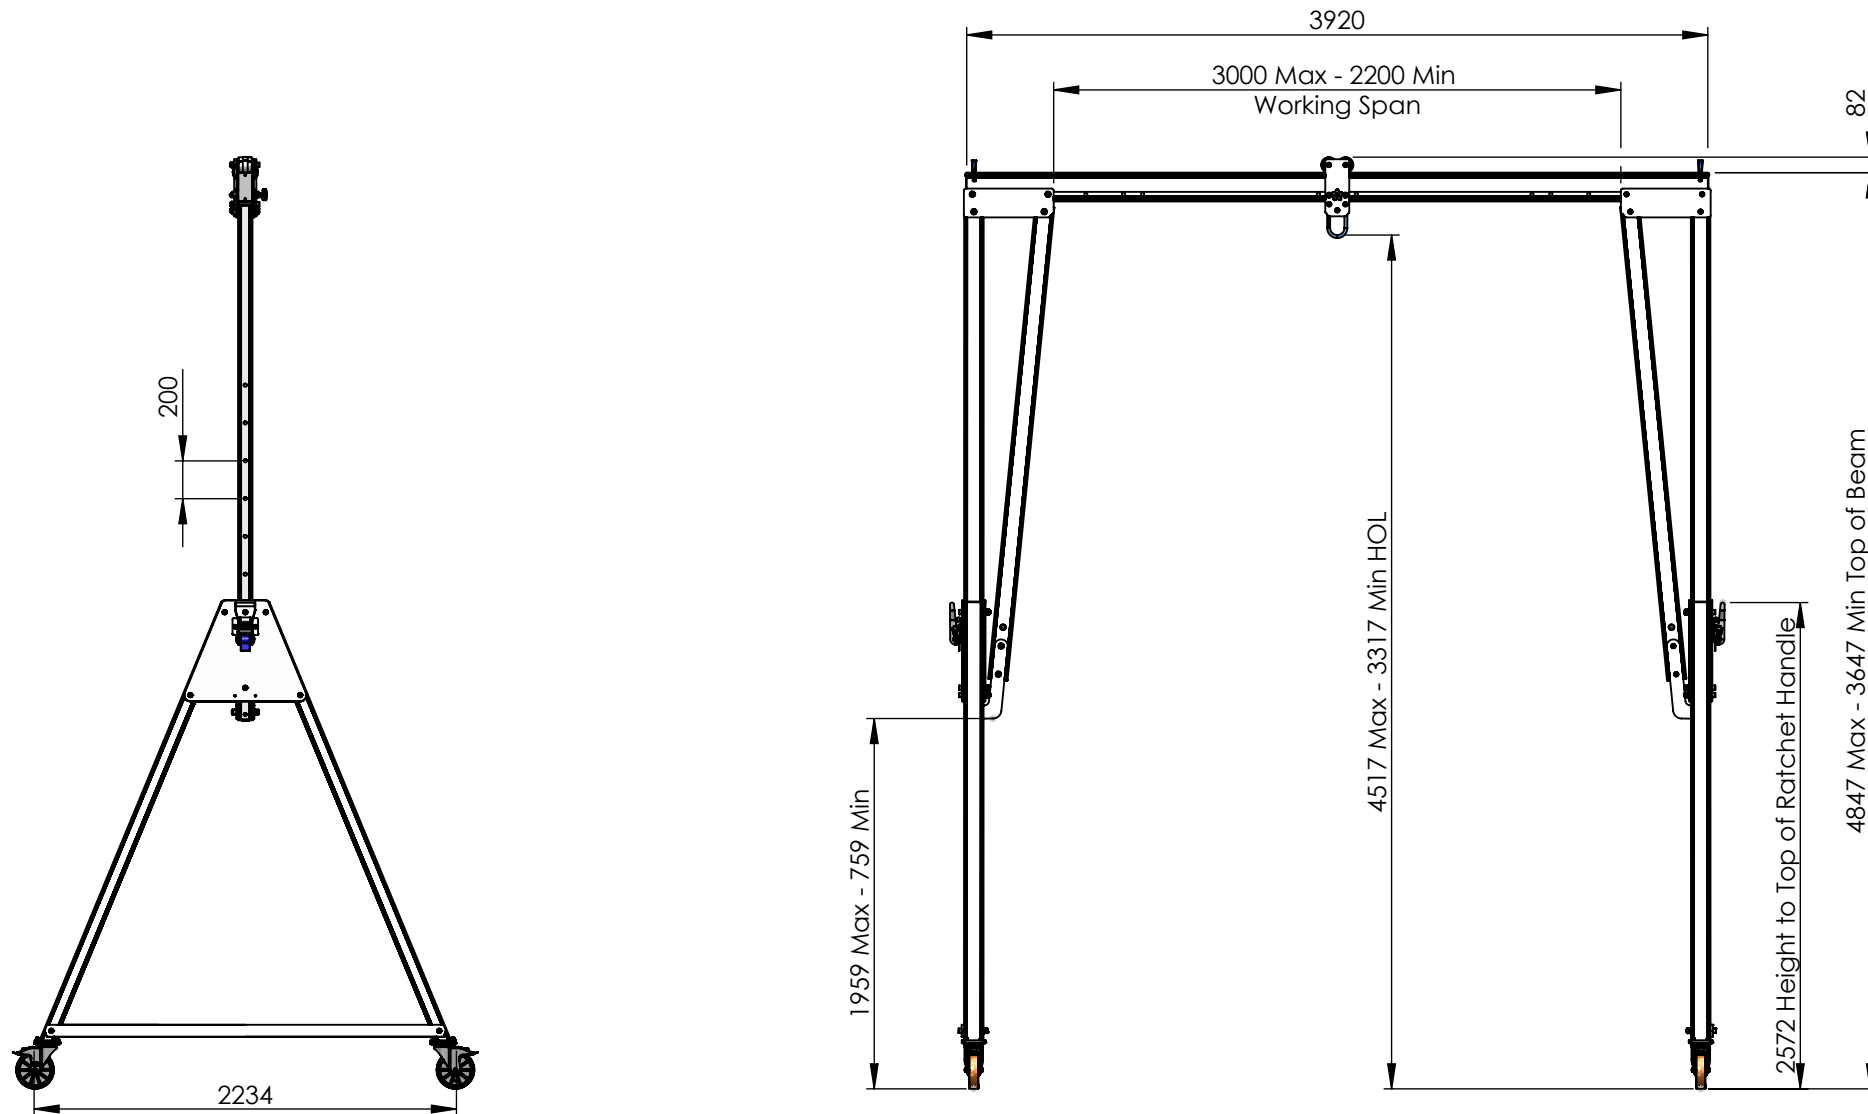

DO NOT SCALE DRAWING

REVISION

03

REID
LIFTING

www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

enquiries@reidlifting.com

	NAME	DATE	FINISH:
DRAWN	BJ	10/03/2021	Anodised
CHK'D			
APPV'D	CM	10/03/2023	MATERIAL: Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC4 with
3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC4-3920A

A4

Estimated Weight: 201 kg

1:40

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 5-10 mm at centre of span
- Maximum castor surface pressure at full load - 13.35 MPa
- Assembled gantry weight (excluding trolleys) - 201kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

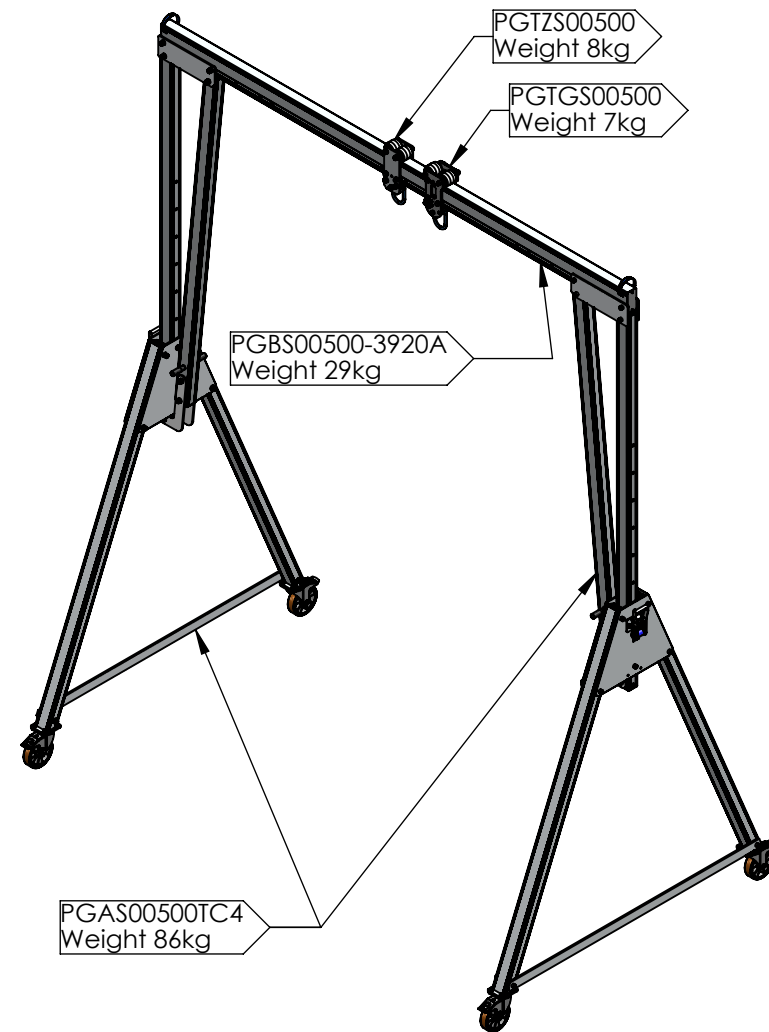

Approved

DO NOT SCALE DRAWING

REVISION

03



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	BJ	10/03/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC4 with 3920mm Beam WLL500kg**

DWG NO.

PGSS00500TC4-3920A

A4


Estimated Weight: 201 kg

1:45

SHEET 2 OF 2



To ensure stability of the structure, the working span of the beam must be equal to or greater than the distance between the castors on the A-frame

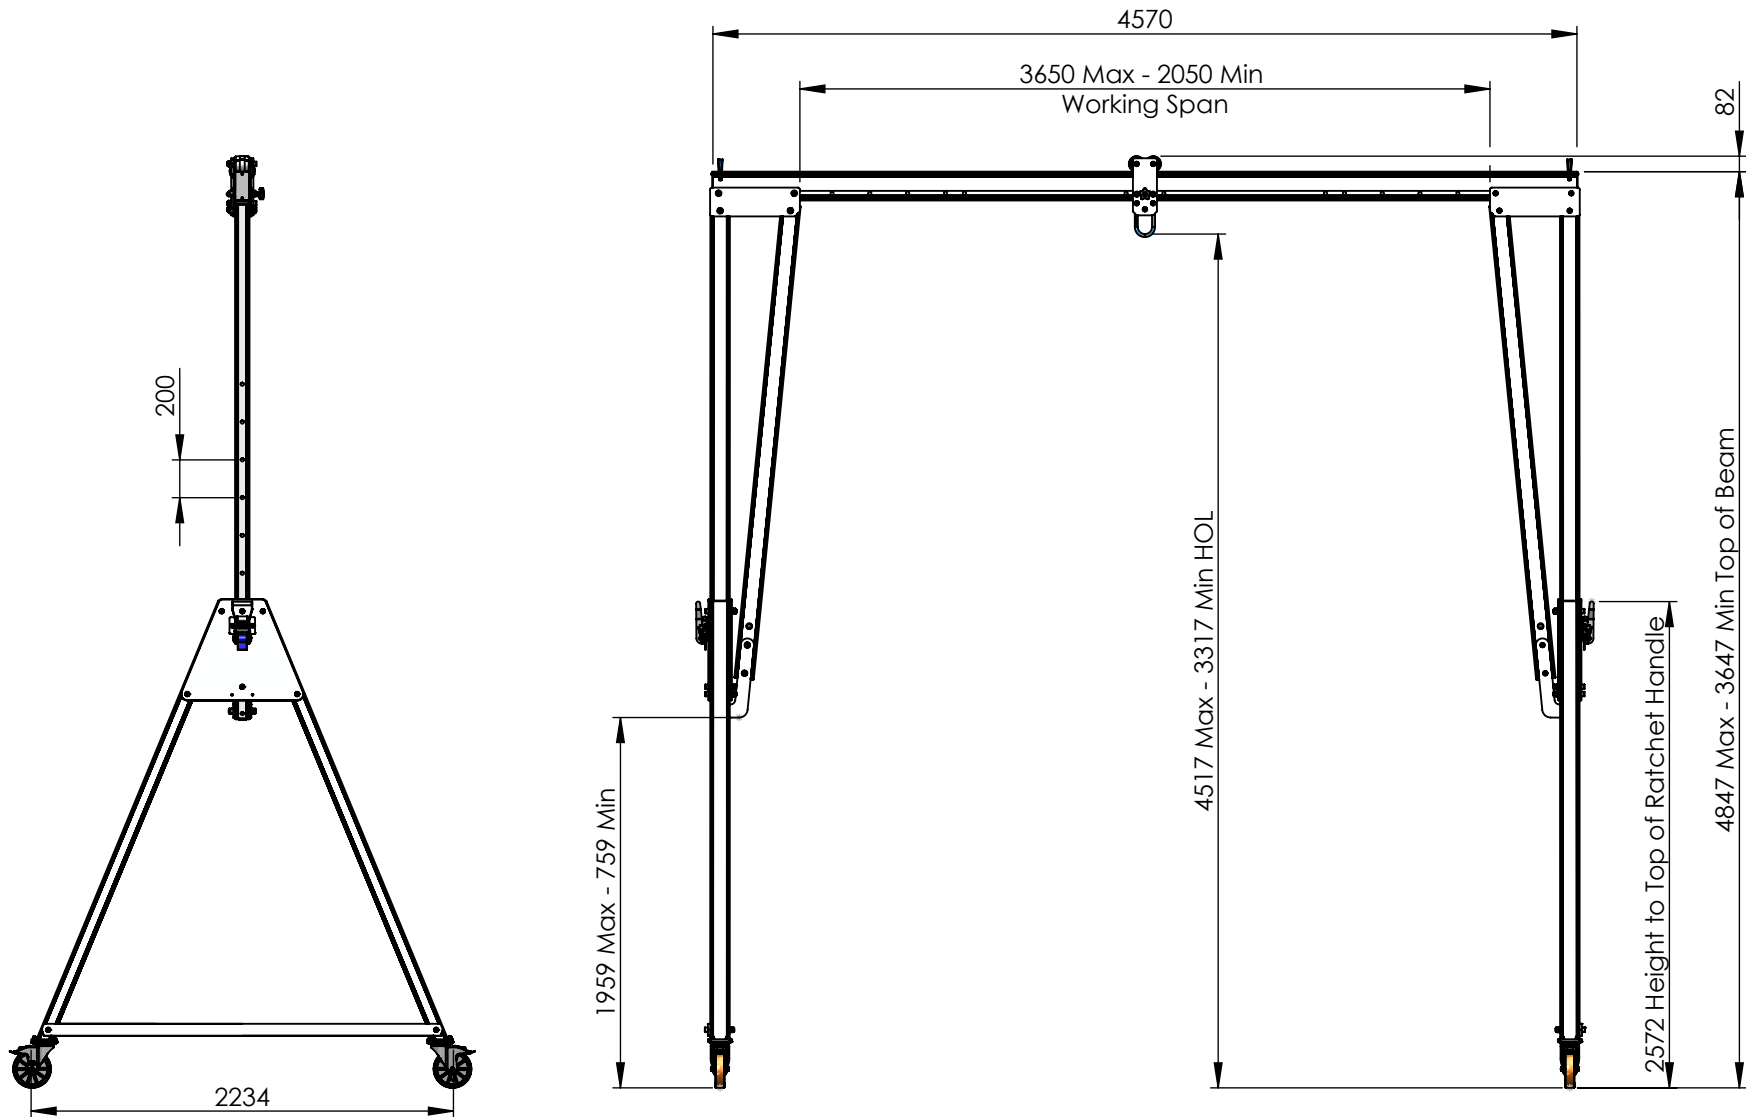

DO NOT SCALE DRAWING

REVISION

02

REID
LIFTING

www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		21/05/2021	Anodised
CHK'D			
CM			
APPV'D		DATE	MATERIAL:
		10/03/2023	Aluminium Alloy
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:

**General Arrangement of REID
Lifting Porta-Gantry Size TC4 with
4570mm Beam WLL500kg**

DWG NO.

PGSS00500TC4-4570A

A4

Estimated Weight: 205 kg

1:40

SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 10-15 mm at centre of span
- Maximum castor surface pressure at full load - 13.4 MPa
- Assembled gantry weight (excluding trollies) - 205kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)
- Tested to and meets the requirements of ANSI Z359.18.2017 for 2 persons.

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12.9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

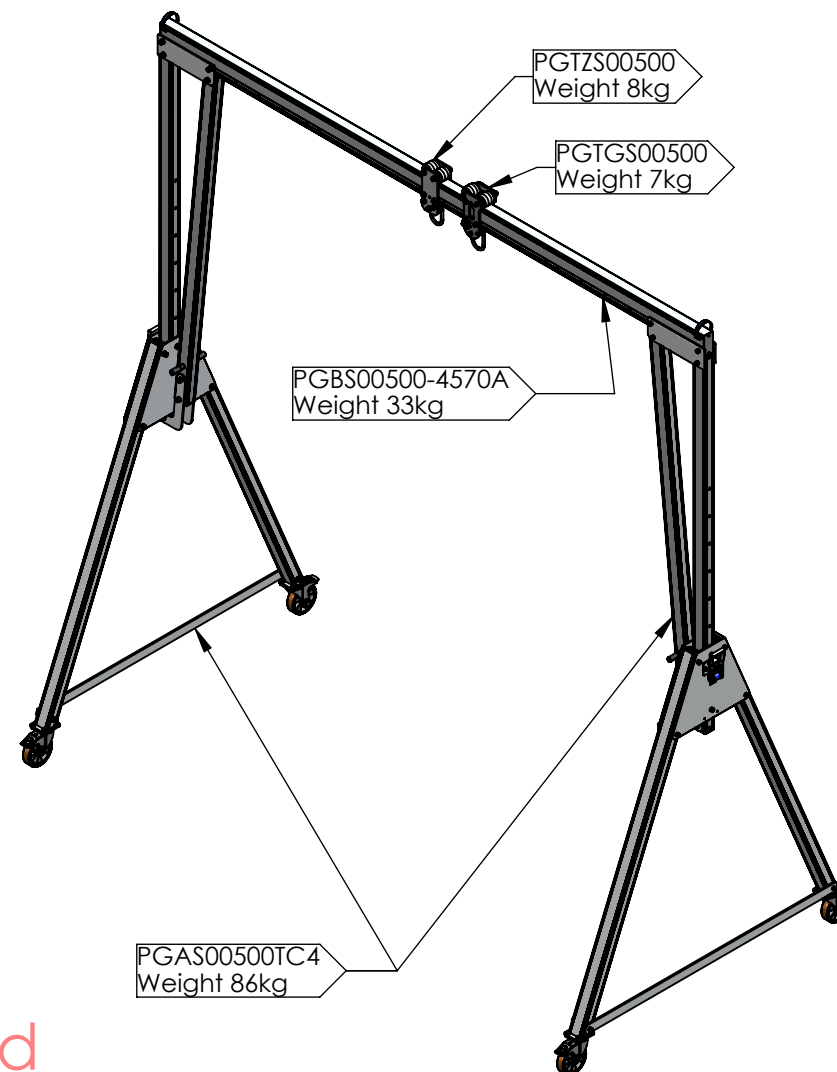

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	21/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC4 with 4570mm Beam WLL500kg**

DWG NO.


PGSS00500TC4-4570A

A4

Estimated Weight: 205 kg

1:45

SHEET 2 OF 2

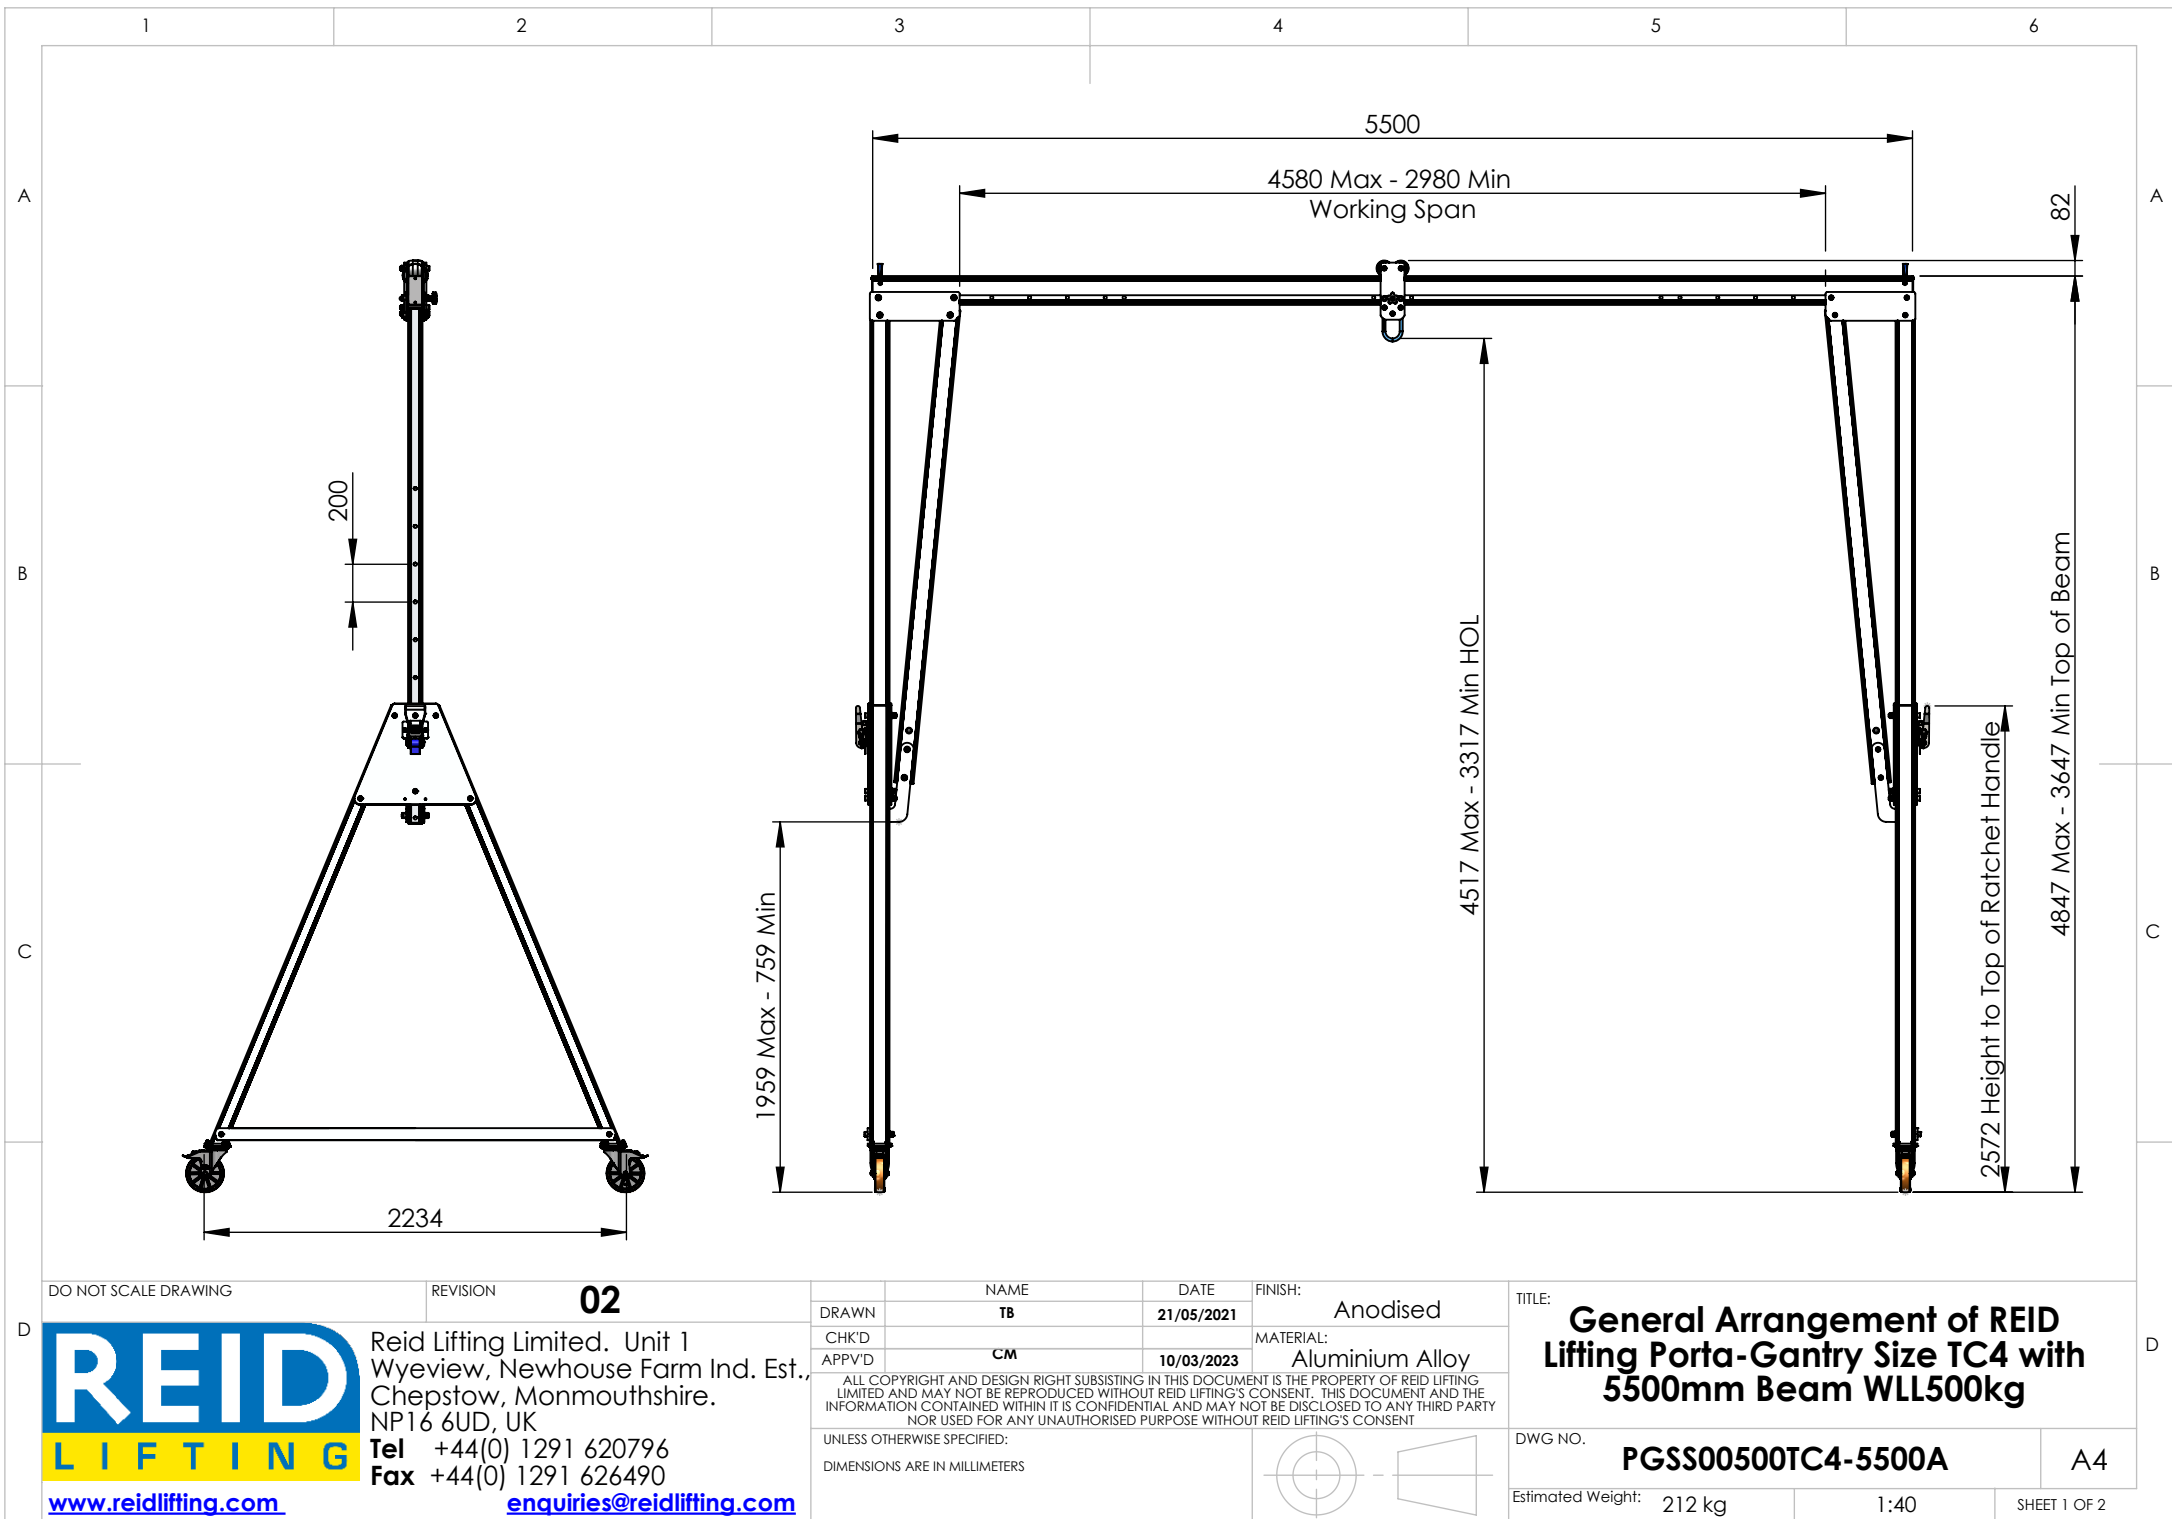

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		21/05/2021	Anodised
CHK'D			
CM		10/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC4 with 5500mm Beam WLL500kg	
DWG NO.	PGSS00500TC4-5500A		A4
Estimated Weight:	212 kg	1:40	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 20-30 mm at centre of span
- Maximum castor surface pressure at full load - 13.48 MPa
- Assembled gantry weight (excluding trolleys) - 212kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

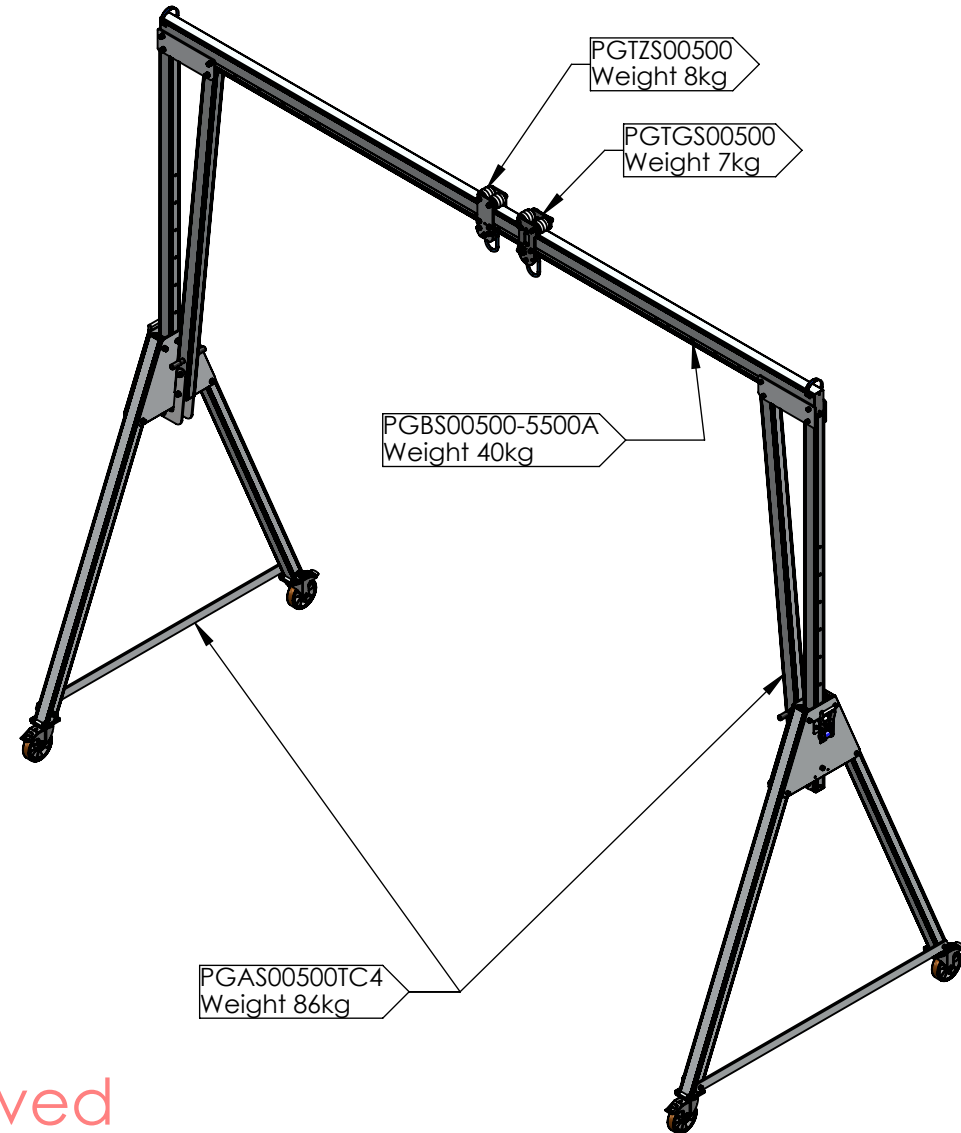

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	21/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC4 with 5500mm Beam WLL500kg**

DWG NO.


PGSS00500TC4-5500A

A4

Estimated Weight: 212 kg

1:45

SHEET 2 OF 2

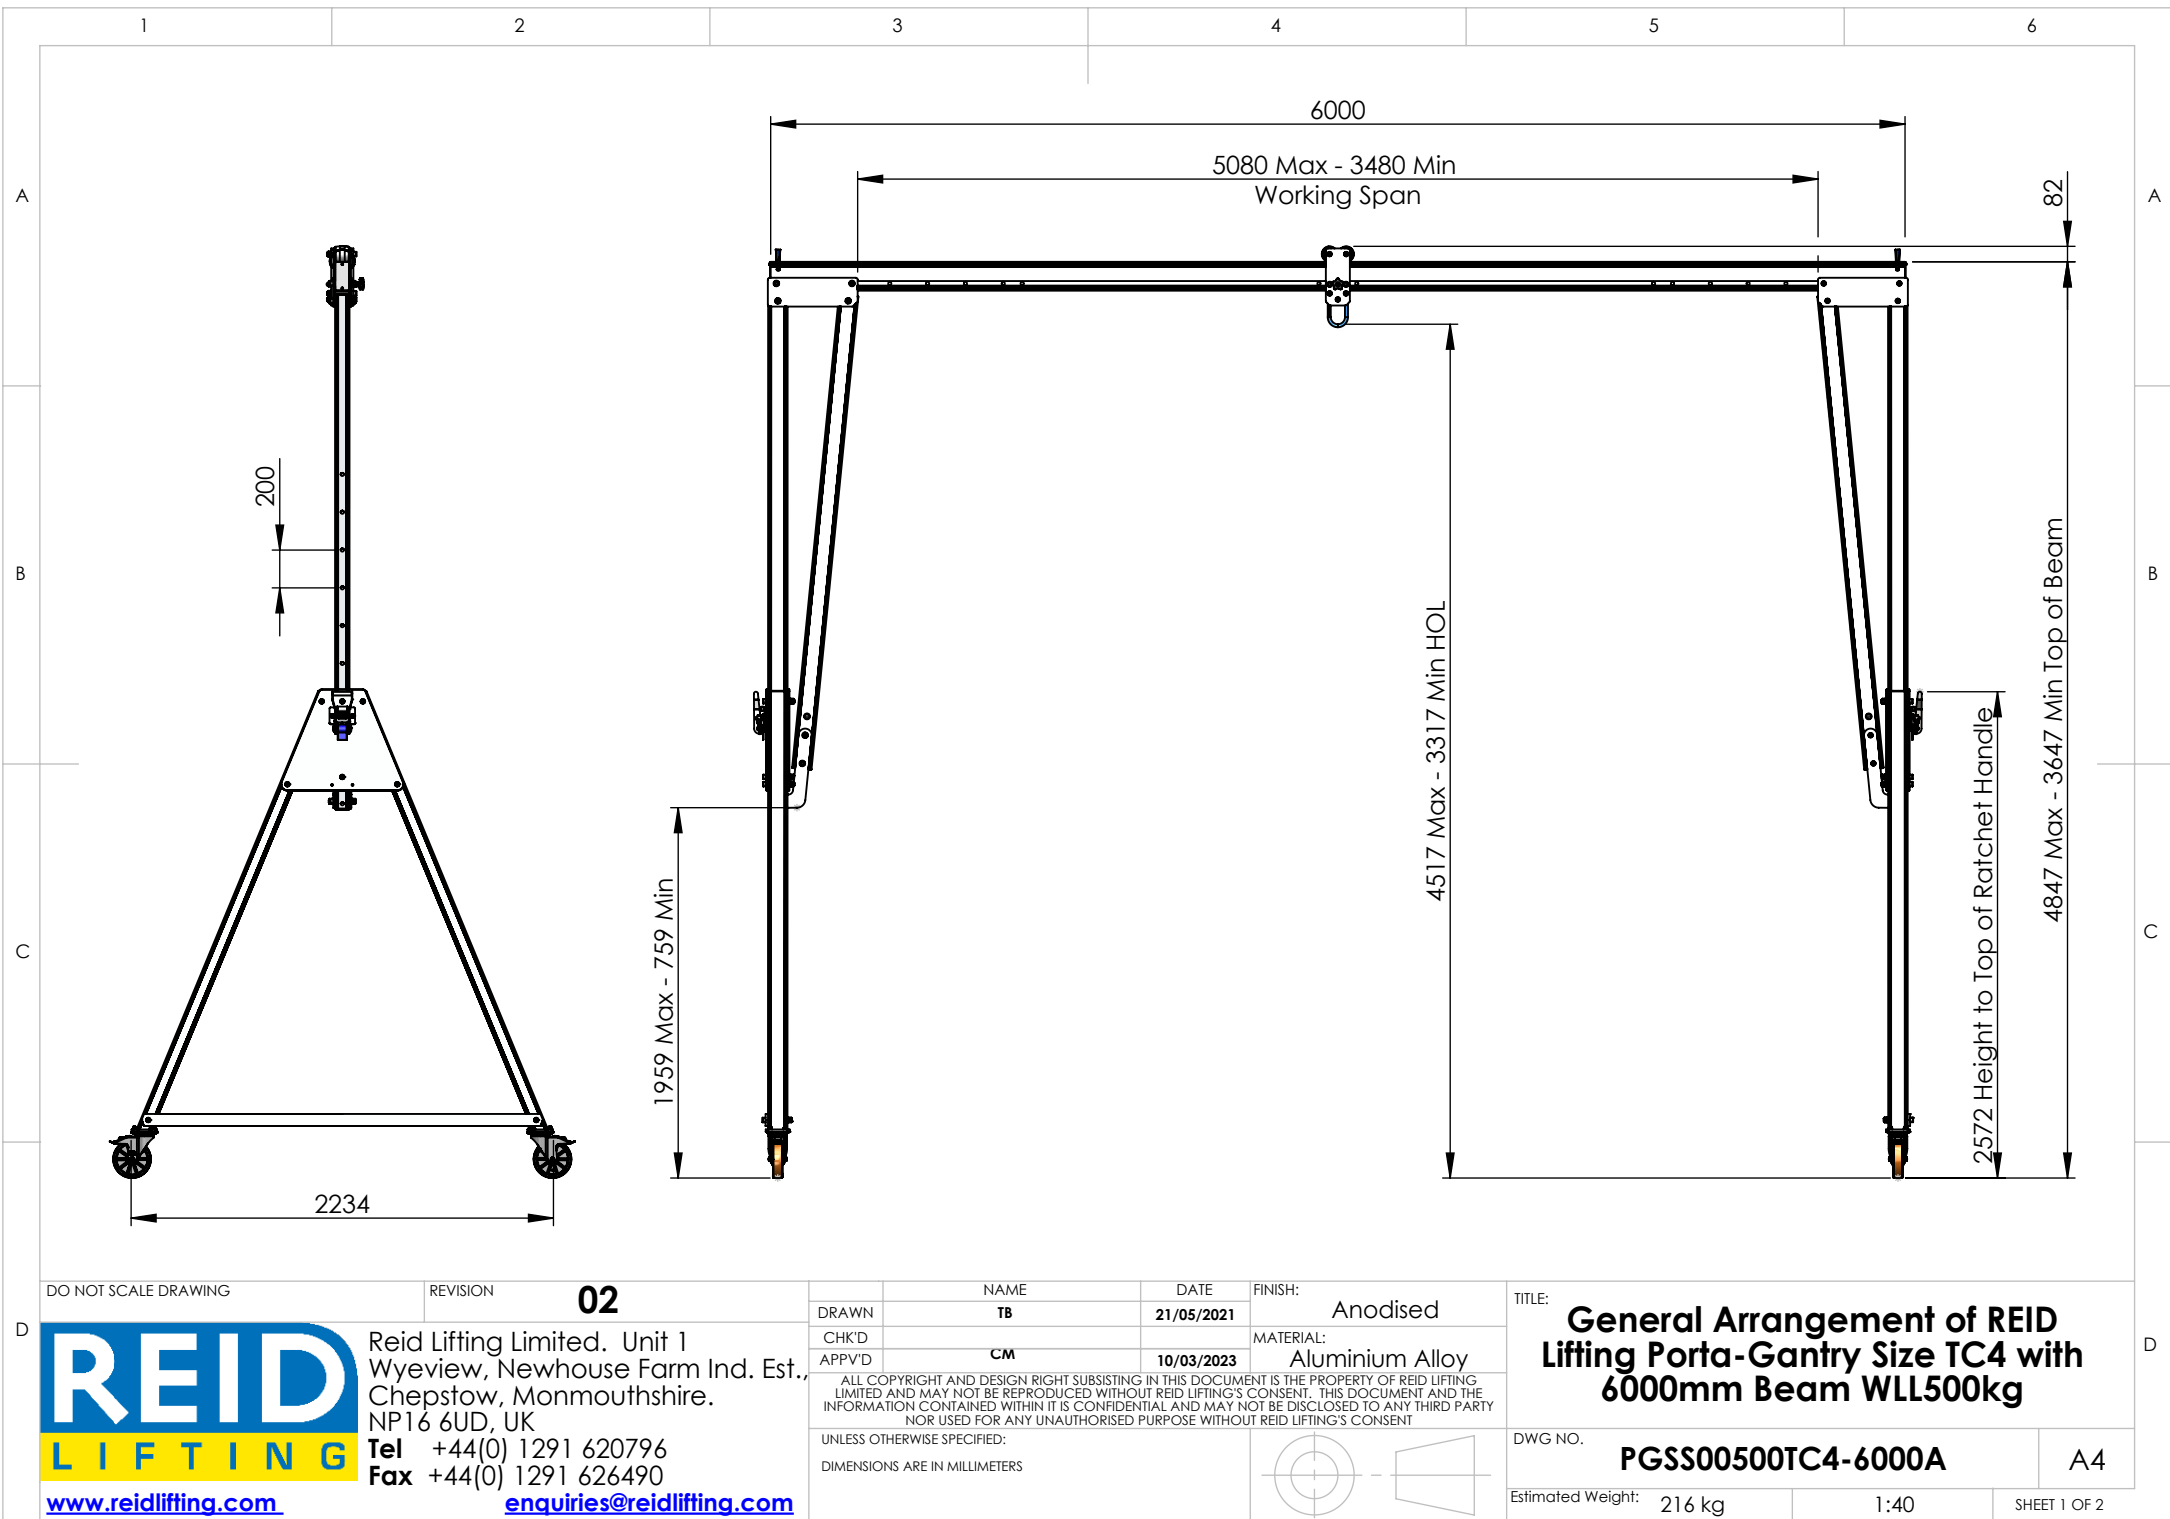

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		21/05/2021	Anodised
CHK'D			
CM		10/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC4 with 6000mm Beam WLL500kg	
DWG NO.	PGSS00500TC4-6000A		A4
Estimated Weight:	216 kg	1:40	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 25-35 mm at centre of span
- Maximum castor surface pressure at full load - 13.52 MPa
- Assembled gantry weight (excluding trollies) - 216kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

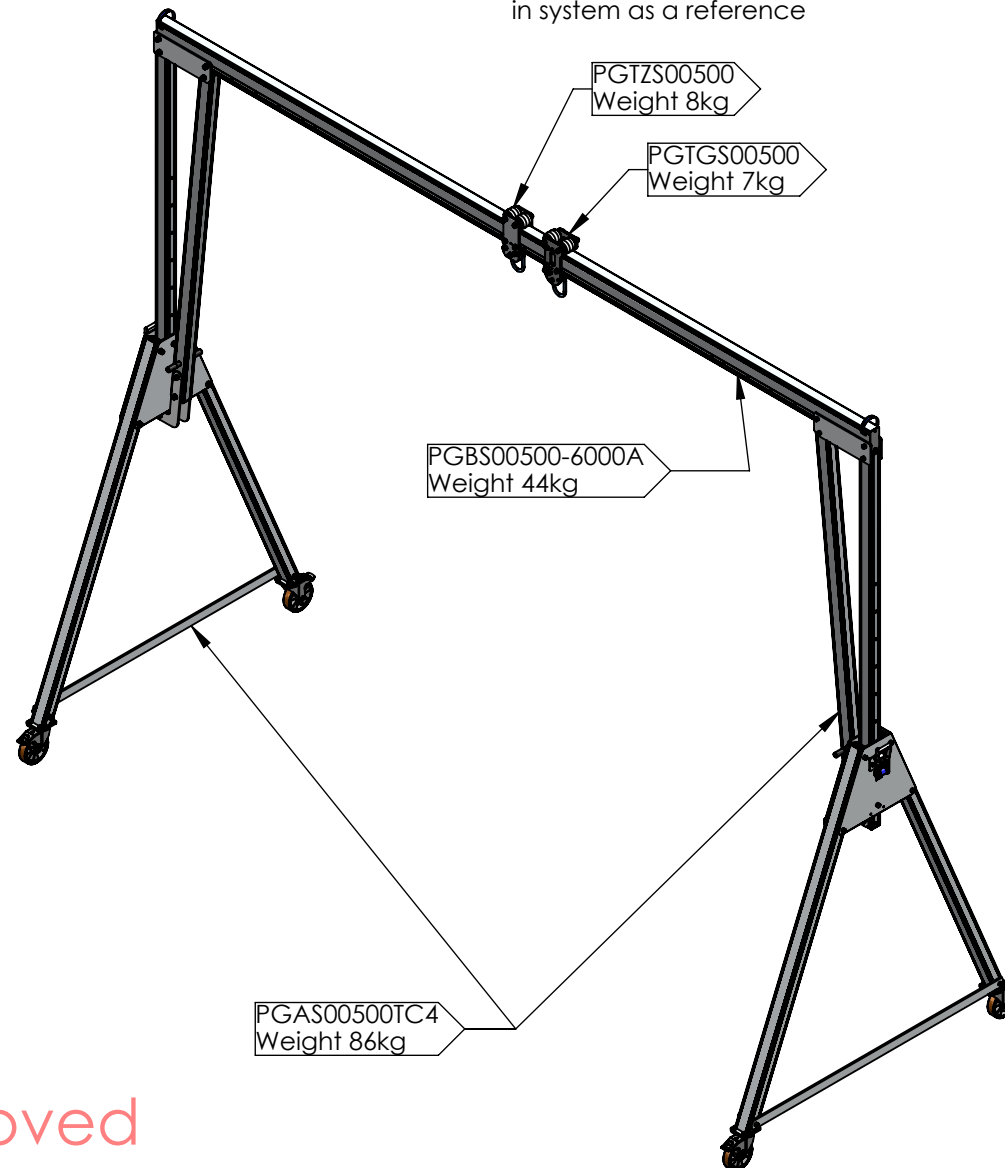

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490


www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	21/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC4 with 6000mm Beam WLL500kg**

DWG NO.


PGSS00500TC4-6000A

A4

Estimated Weight: 216 kg

1:45

SHEET 2 OF 2

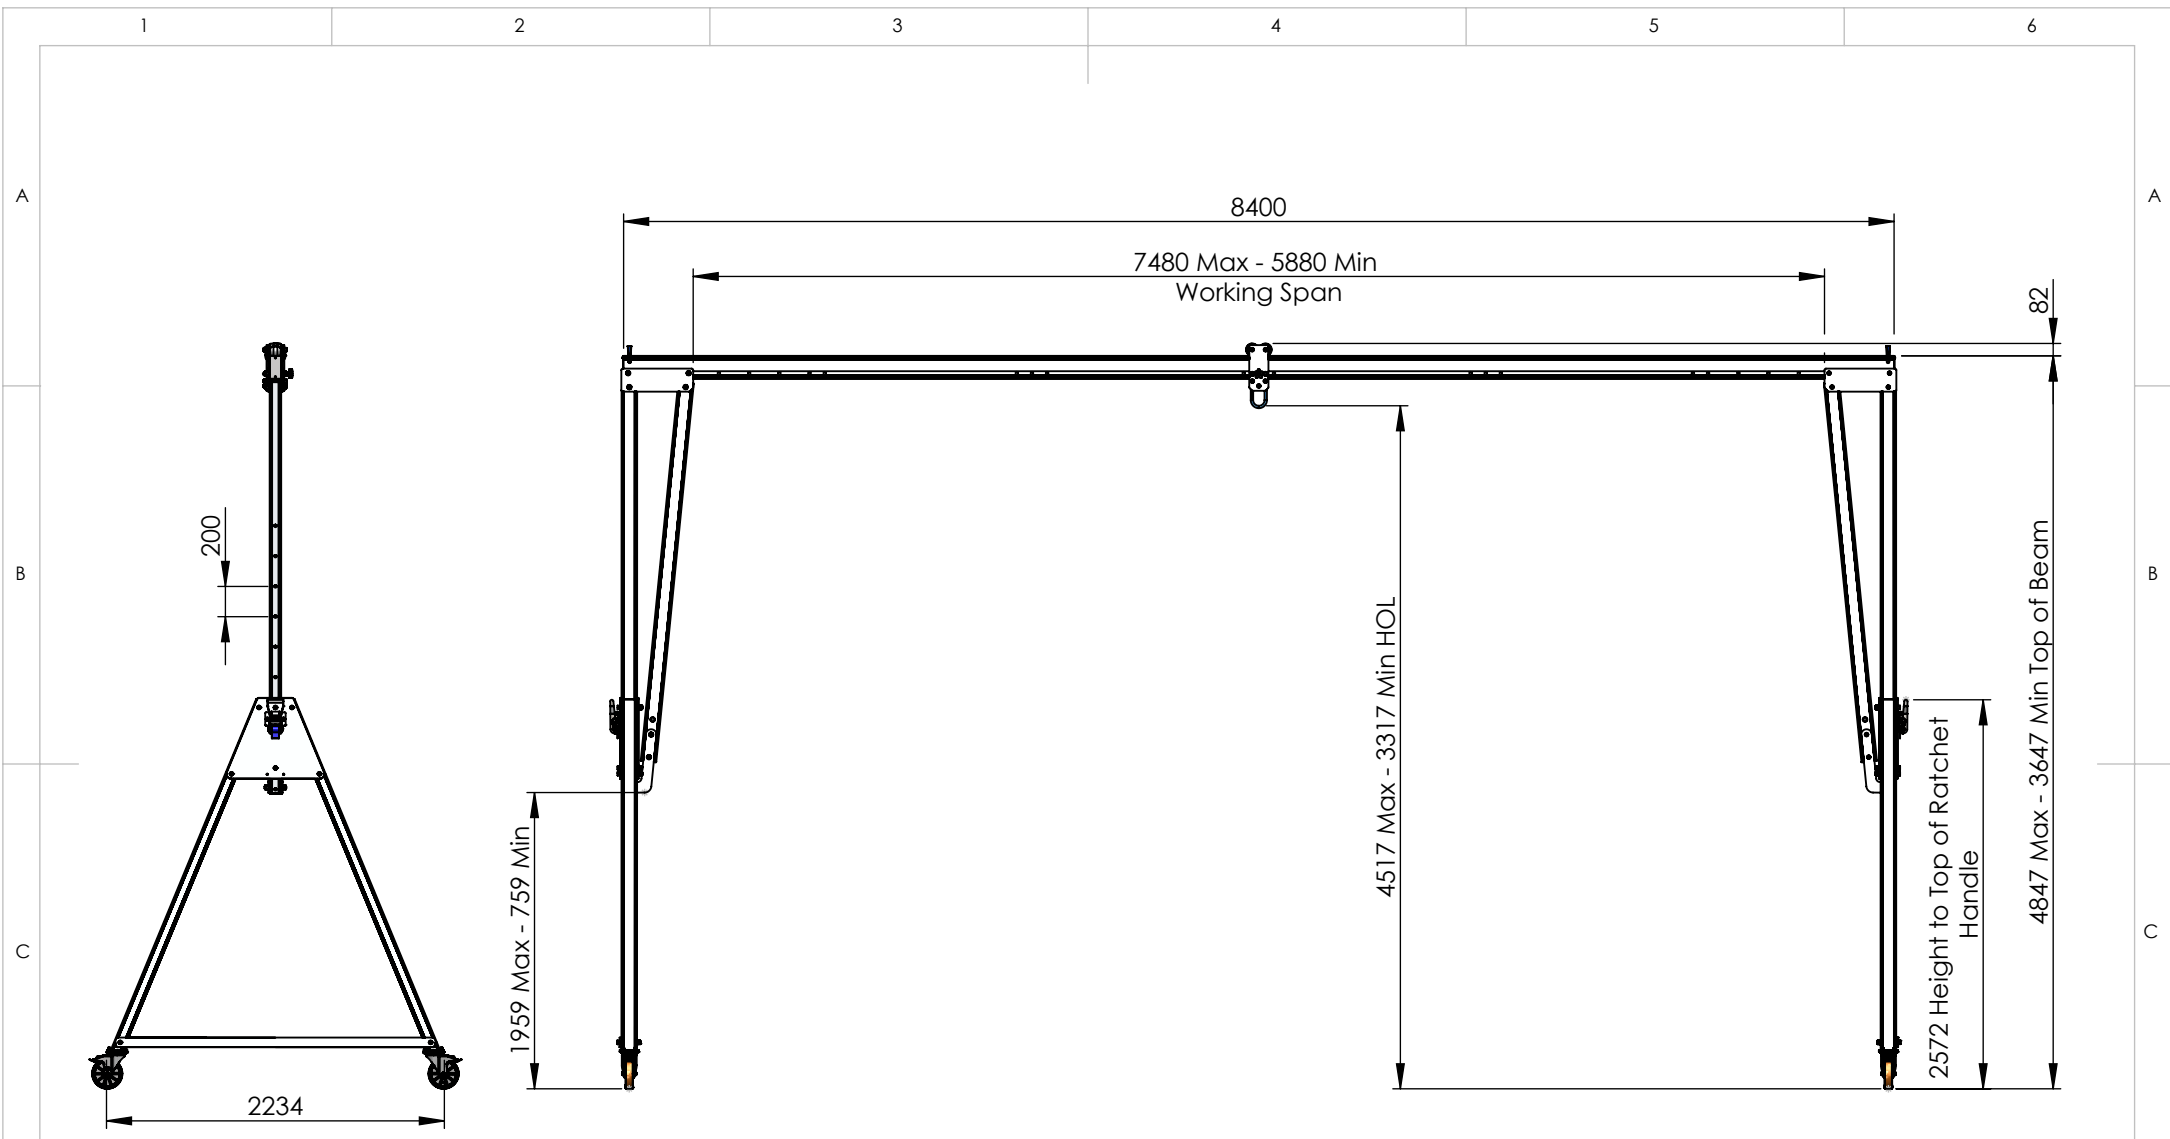

DO NOT SCALE DRAWING

REVISION

02



www.reidlifting.com

Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796

Fax +44(0) 1291 626490

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		21/05/2021	Anodised
CHK'D			
CM		10/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC4 with 8400mm Beam WLL500kg	
DWG NO.	PGSS00500TC4-8400A		A4
Estimated Weight:	233 kg	1:50	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 60-70 mm at centre of span
- Maximum castor surface pressure at full load - 13.71MPa
- Assembled gantry weight (excluding trollies) - 233kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)

Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference



Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796
Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	21/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC4 with 8400mm Beam WLL500kg**

DWG NO.


PGSS00500TC4-8400A

A4

Estimated Weight: 233 kg

1:55

SHEET 2 OF 2

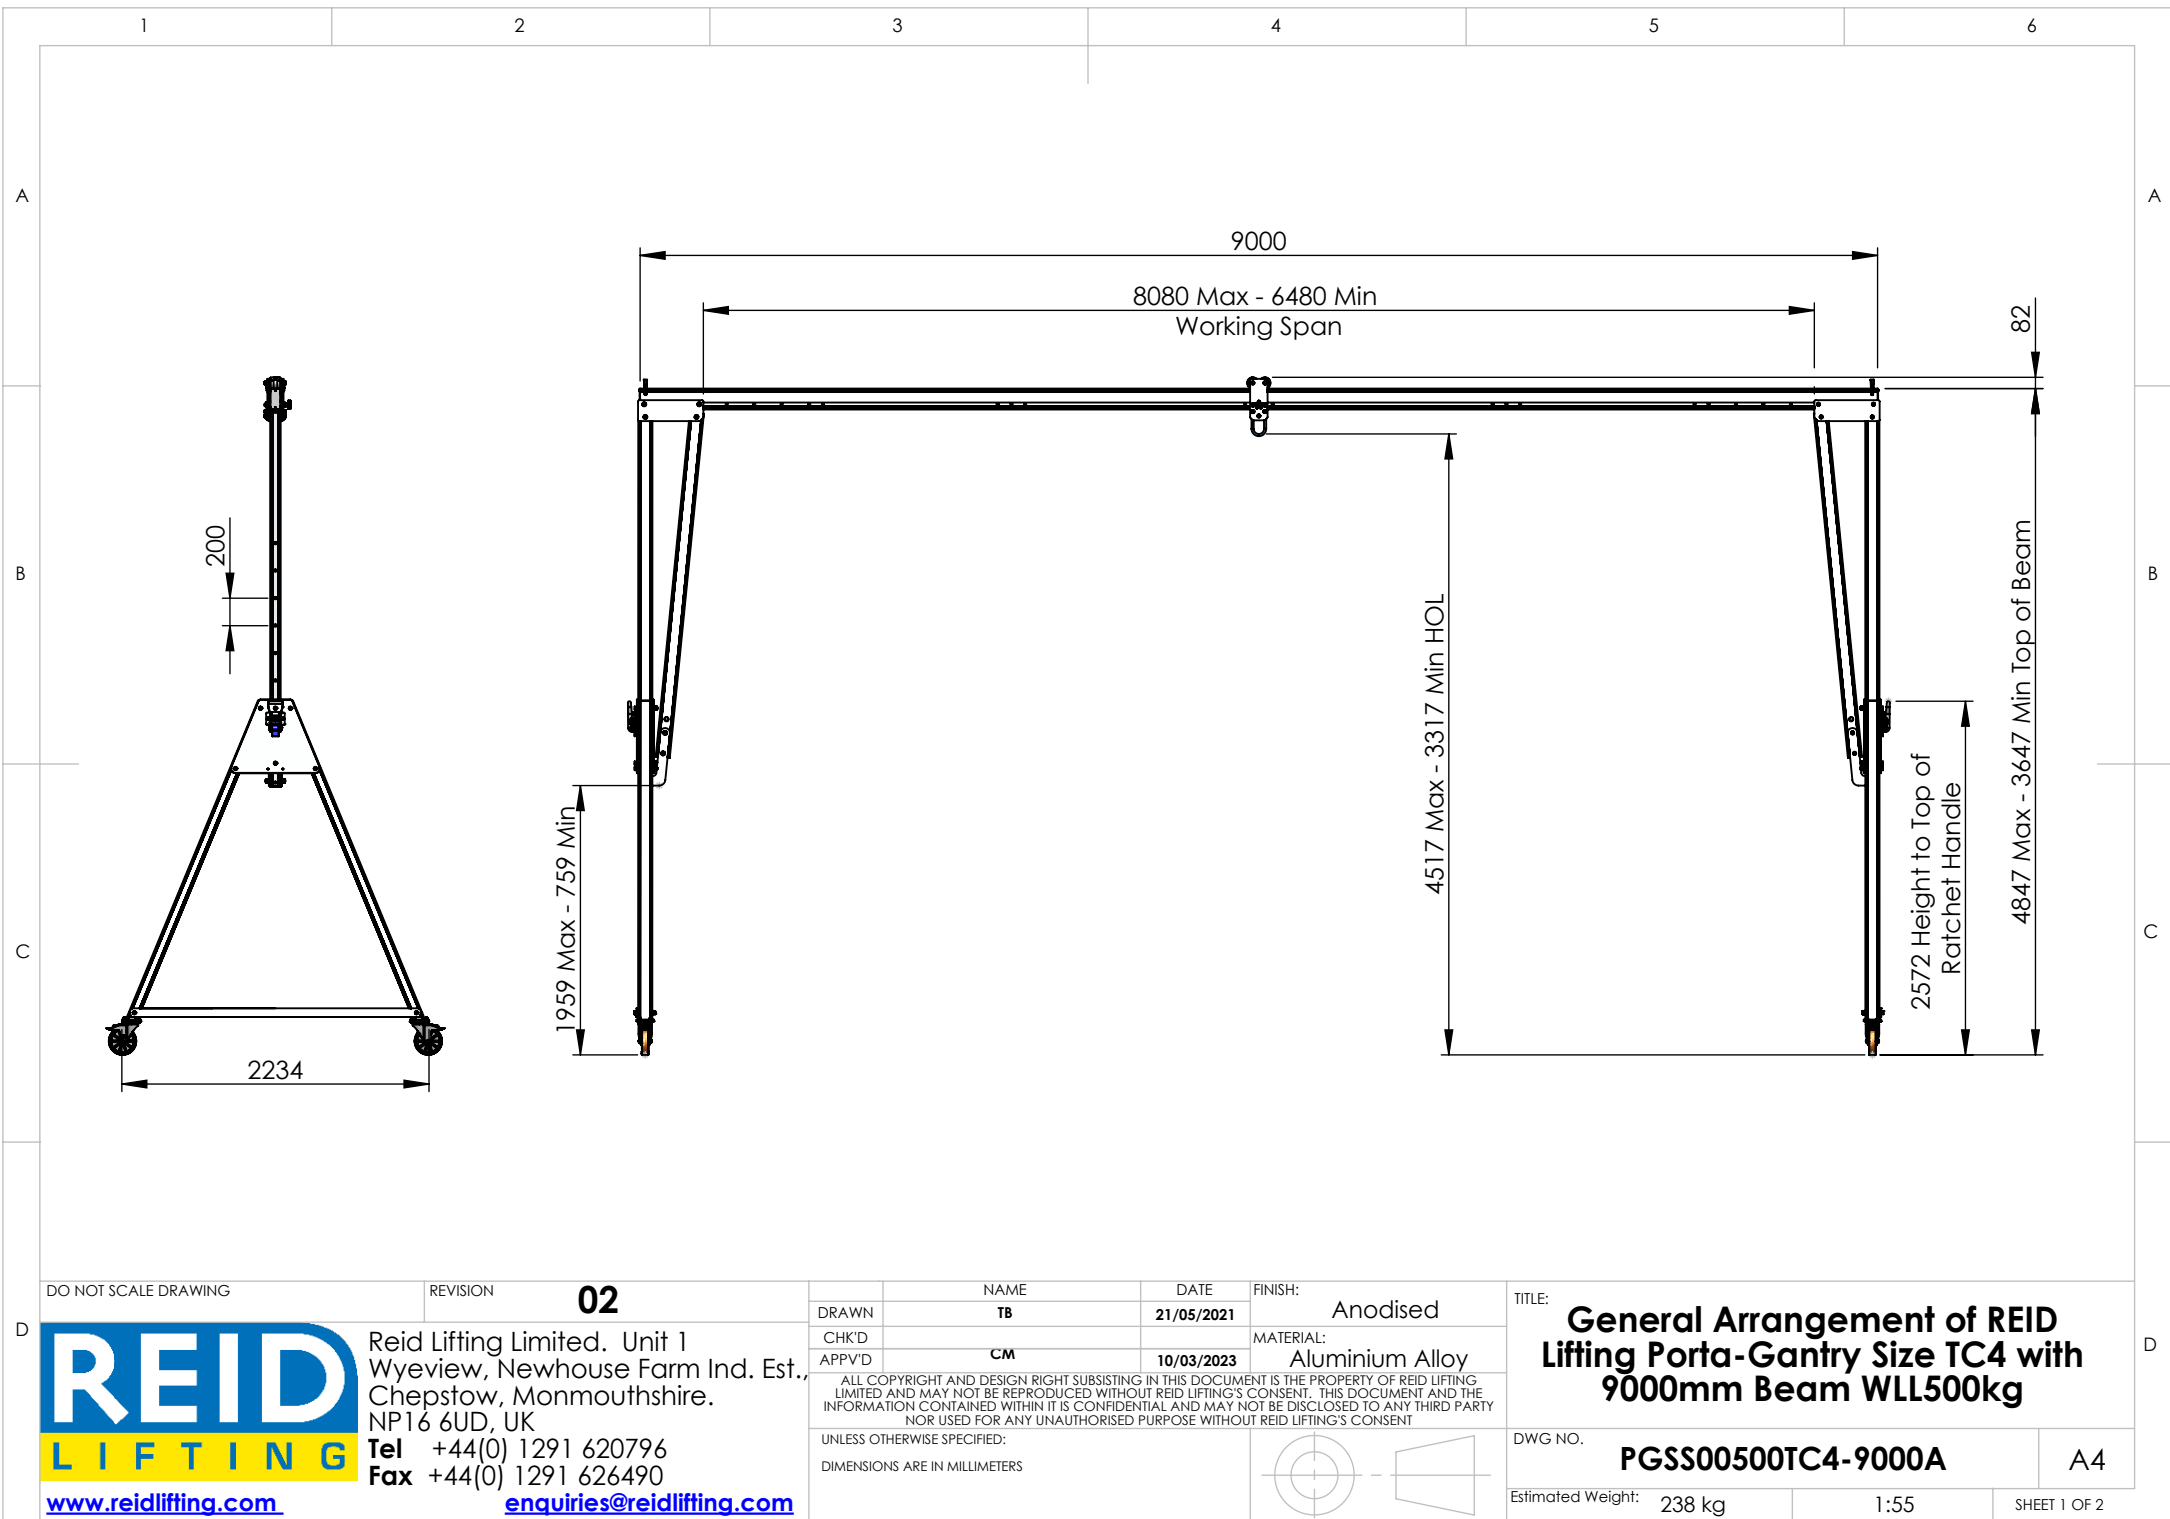

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0) 1291 620796
Fax +44(0) 1291 626490

www.reidlifting.com

enquiries@reidlifting.com

DRAWN	NAME	DATE	FINISH:
TB		21/05/2021	Anodised
CHK'D			
CM		10/03/2023	Aluminium Alloy
APPV'D			
ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT			
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN MILLIMETERS			



TITLE:		General Arrangement of REID Lifting Porta-Gantry Size TC4 with 9000mm Beam WLL500kg	
DWG NO.	PGSS00500TC4-9000A		A4
Estimated Weight:	238 kg	1:55	SHEET 1 OF 2

General Specification

- Maximum rated capacity for goods lifting - 500kg
- Maximum rated capacity for personnel lifting - 250kg
- Beam deflection at maximum rated capacity of 500kg - 80-90 mm at centre of span
- Maximum castor surface pressure at full load - 13.76MPa
- Assembled gantry weight (excluding trollies) - 238kg
- All welding to BS EN ISO 15614-2: 2005 by certified welders.
- For further details and assembly information refer to Operations and Maintenance Manual for Porta Gantry Product. (available at www.reidlifting.com)


Fall Protection Standards

- Certified to EN795:2012 Type B & supplied under PPE Regulation 2016/425
- Notified Body Witness tested to the requirements of PD CEN/TS16415:2013 for 3 persons
- Exceeds the requirements of IRATA ICOP & BS7985 (15kN MBL)

Materials & Finishes

- Frame and beam - 6082 T6 Aluminium alloy. Anodised.
- Castors - Steel. Bright Zinc Plated.
- Castor Wheels & Rollers - Aluminium & Polyurethane
- Fixings - Steel. Grade 12:9. Bright Zinc Plated.

Note: Master Link Trolleys shown in system as a reference

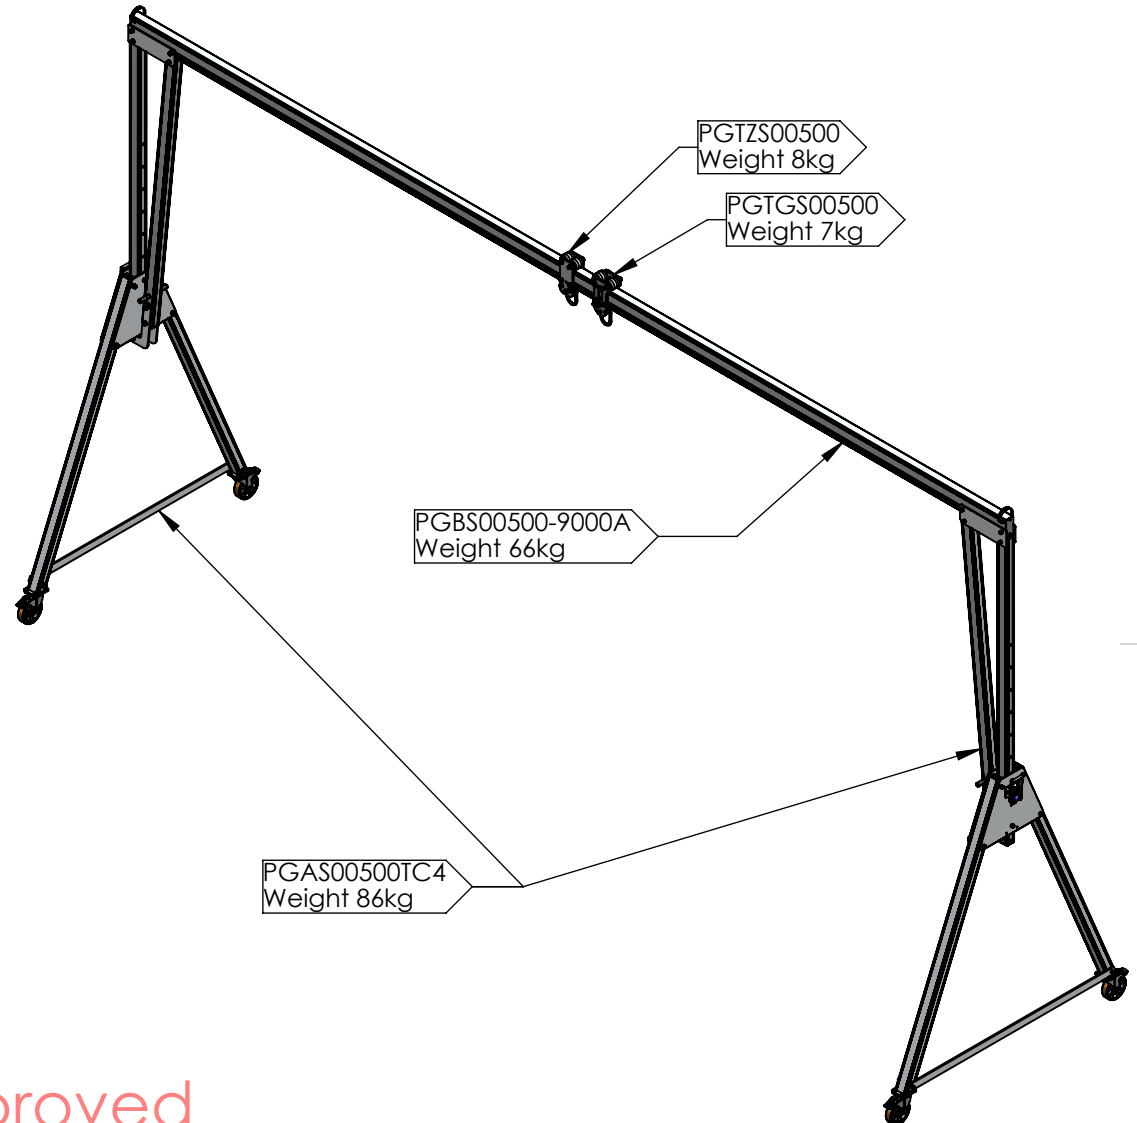

Approved

DO NOT SCALE DRAWING

REVISION

02



Reid Lifting Limited. Unit 1
Wyeview, Newhouse Farm Ind. Est.,
Chepstow, Monmouthshire.
NP16 6UD, UK

Tel +44(0)1291 620796

Fax: +44(0)1291 626490

www.reidlifting.com

enquiries@reidlifting.com

	NAME	DATE
DRAWN	TB	21/05/2021
CHK'D		
APPV'D	CM	10/03/2023

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS

ALL COPYRIGHT AND DESIGN RIGHT SUBSISTING IN THIS DOCUMENT IS THE PROPERTY OF REID LIFTING LIMITED AND MAY NOT BE REPRODUCED WITHOUT REID LIFTING'S CONSENT. THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN IT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED TO ANY THIRD PARTY NOR USED FOR ANY UNAUTHORISED PURPOSE WITHOUT REID LIFTING'S CONSENT



TITLE: **General Arrangement of REID Lifting Porta-Gantry Size TC4 with 9000mm Beam WLL500kg**

DWG NO.

PGSS00500TC4-9000A

A4

Estimated Weight: 238 kg

1:55

SHEET 2 OF 2